


OD6025-IP69K Series



DC Fan- 12V, 24V, 48V
60x60x25mm (2.4"x1")

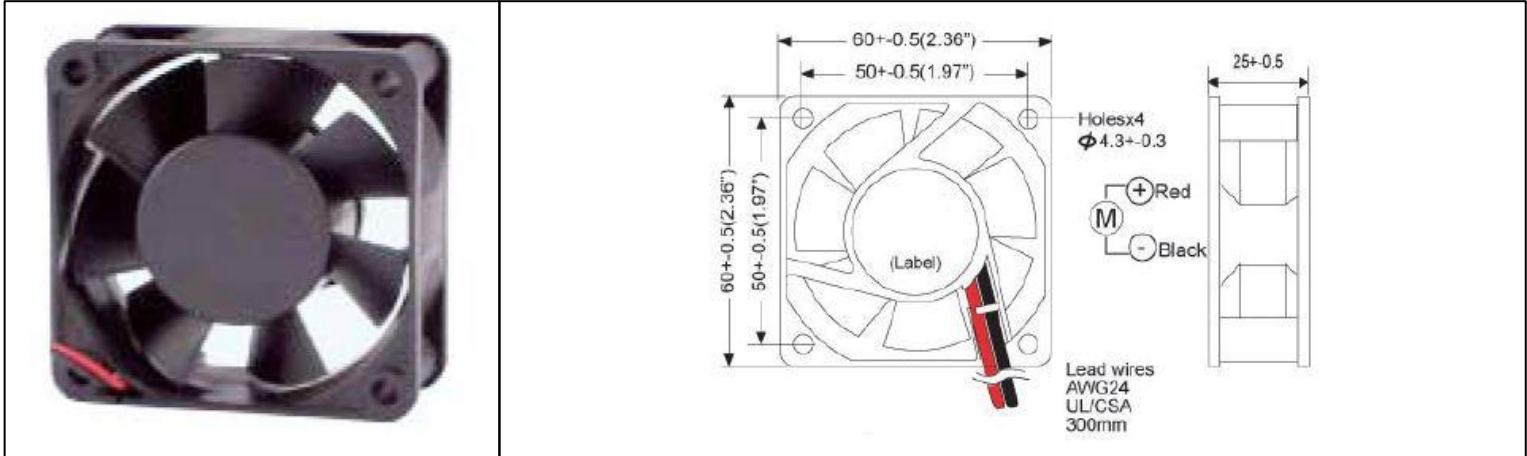

Frame	PBT, UL94 V-0 plastic	Operating Temperature -20°C ~ +65°C Storage Temperature -20°C ~ +75°C Life Expectancy 60,000 hours (L10 at 45°C) Available Options Tachometer Alarm PWM Other Voltage and Speeds Weight: 0.14 lbs m0	
Impeller	PBT, UL94 V-0 plastic		
Connection	2x Lead wires 24 AWG		
Motor	Brushless DC, Auto Restart, Auto Cutoff, Polarity Protected, Electronically Protected, IP69K		
Bearing System	Dual Ball Bearings		
Dielectric Strength	500VAC/min		

Part Number	Rated Voltage	Input Power	Rated Current	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dB)	Max. Static Pressure
OD6025-12HBIP69K	12 VDC	1.8 W	0.15 A	4000	25	30	0.22" H ₂ O
OD6025-24HBIP69K	24 VDC	2.8 W	0.12 A	4000	25	30	0.22" H ₂ O
OD6025-48HBIP69K	48 VDC	3.4 W	0.07 A	4200	28	30	0.23" H ₂ O