


# OD8032 Series



DC Fan - 12, 24, 48V  
80x32mm (3.15"x 1.25")

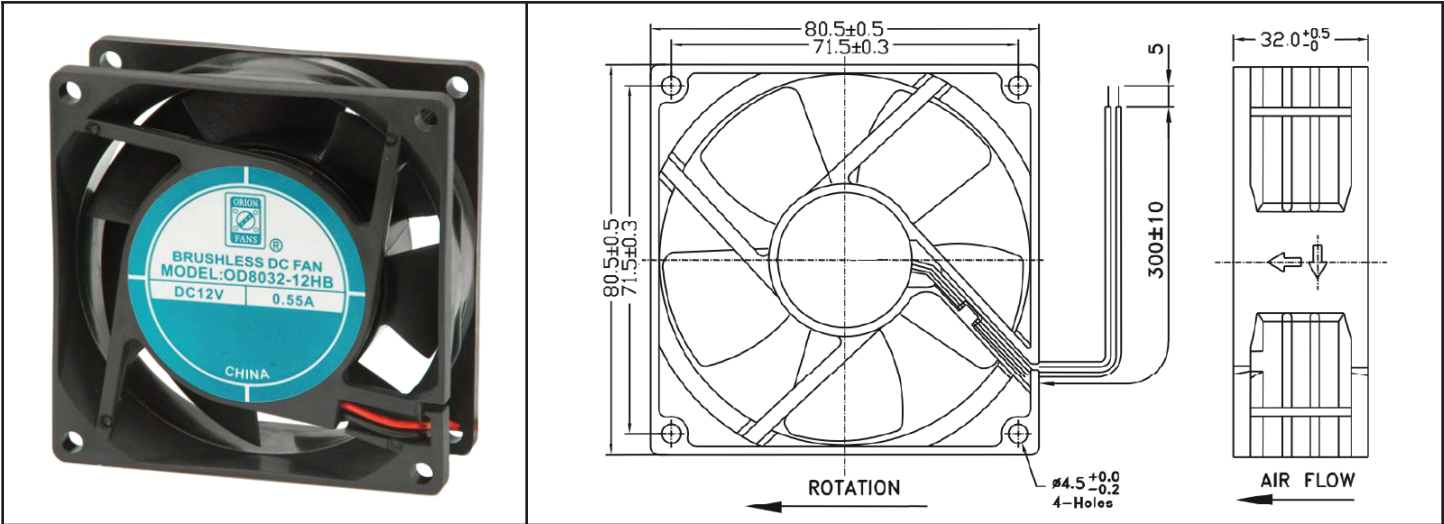

<b>Frame</b>	PBT, UL94V-0 plastic	<b>Available Options</b> Tachometer (FG) Alarm (RD) Thermal Speed Control (Thermistor) PWM Input (Manual Speed Control)  <b>Operating Temperature</b> Ball: -20C ~ +70C Sleeve: 10C ~ +50C Bearing  <b>Storage Temp</b> -40C ~ +80C  <b>Life Expectancy (L10)</b> Ball: 70,000 hours (40C) Sleeve: 35,000 hours (40C)  Weight: ~ 0.24 lbs. m1	
<b>Impeller</b>	PBT, UL94V-0 plastic		
<b>Connection</b>	2x Lead wires (24AWG)		
<b>Motor</b>	Brushless DC, auto restart, polarity protected		
<b>Bearing System</b>	Dual ball or Sleeve		
<b>Insulation Resistance</b>	>100M ohm between lead-wire and frame (500VDC)		
<b>Dielectric Strength</b>	1 min at 1500 VAC, 50/60Hz		


Model Number	Speed (RPM)	Airflow (CFM)	Noise (dB)	Volts DC	Voltage Range	Real Current (Amps)	Max. Static Pressure (H <sub>2</sub> O)
OD8032-12H*	3800	49.8	41.0	12	10.8~13.2	0.19	.28
OD8032-12M*	3400	44.8	36.7	12	10.8~13.2	0.16	.24
OD8032-12L*	3000	40.0	35.0	12	10.8~13.2	0.11	.19
OD8032-24H*	3800	49.8	41.8	24	21.6~26.4	0.12	.28
OD8032-24M*	3400	44.8	36.7	24	21.6~26.4	0.10	.24
OD8032-24L*	3000	39.6	35.5	24	21.6~26.4	0.07	.19
OD8032-48H*	3800	50.0	42.0	48	24~56	0.07	.28
OD8032-48L*	3000	39.6	35.5	48	24~56	0.06	.19

\* Indicate "B" (Ball Bearing), "S" (Sleeve Bearing)


# OD8032-12HHB02A




DC Fan, 12VDC  
80x32mm (3.15x1.25in)

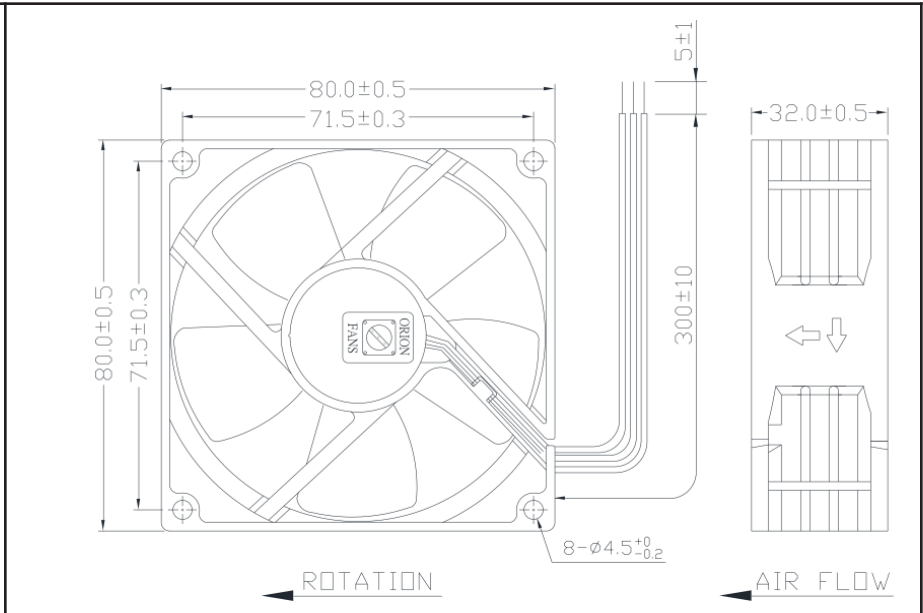

Frame & Impeller	PBT, UL94V-0 plastic	<b>Available Options</b> IP55 Other speeds and voltages Tachometer PWM  *Connection: Wire Leads - UL1007 24AWG Red(+), Black(-), Yellow Alarm  Weight: 108 g
Connection	3x Lead wires *	
Motor	Brushless DC, auto restart, polarity protected.	
Bearing System	Dual ball bearing	
Insulation Resistance	Min. 10M at 500VDC	
Dielectric Strength	1 second at 500VAC max leakage 500 microamp	
Temperature Range	-10C ~ +70C	
Storage Temperature	-40C ~ +80C	
Life (L10)	70,000 hours (40C)	

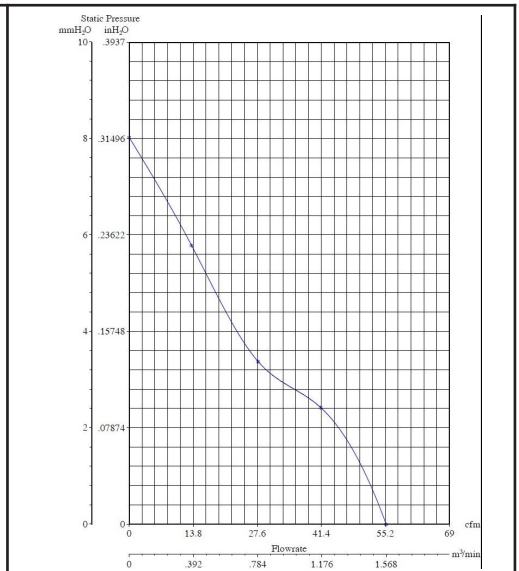


Model Number	OD8032-12HHB02A
Part Number	184151231
Nominal Voltage	12 VDC
Voltage Range	7~13.2 VDC
Nominal Current	.23 A
Rated Power	4.56 Watts
Rated Speed (RPM)	4200
Airflow (CFM)	55.5
Noise Level (dB)	44
Max. Static Pressure	.32 "H <sub>2</sub> O

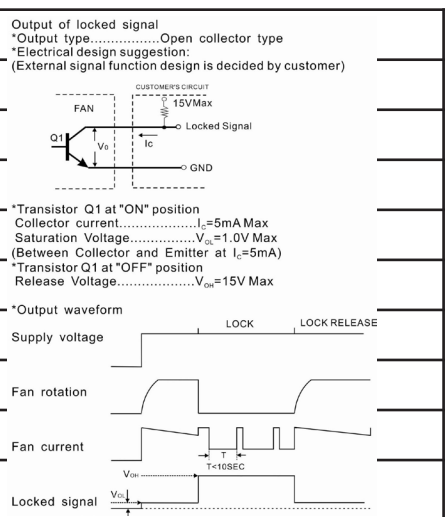

# OD8032-24HHB



DC Fan, 24VDC  
80x32mm (3.15x1.25in)

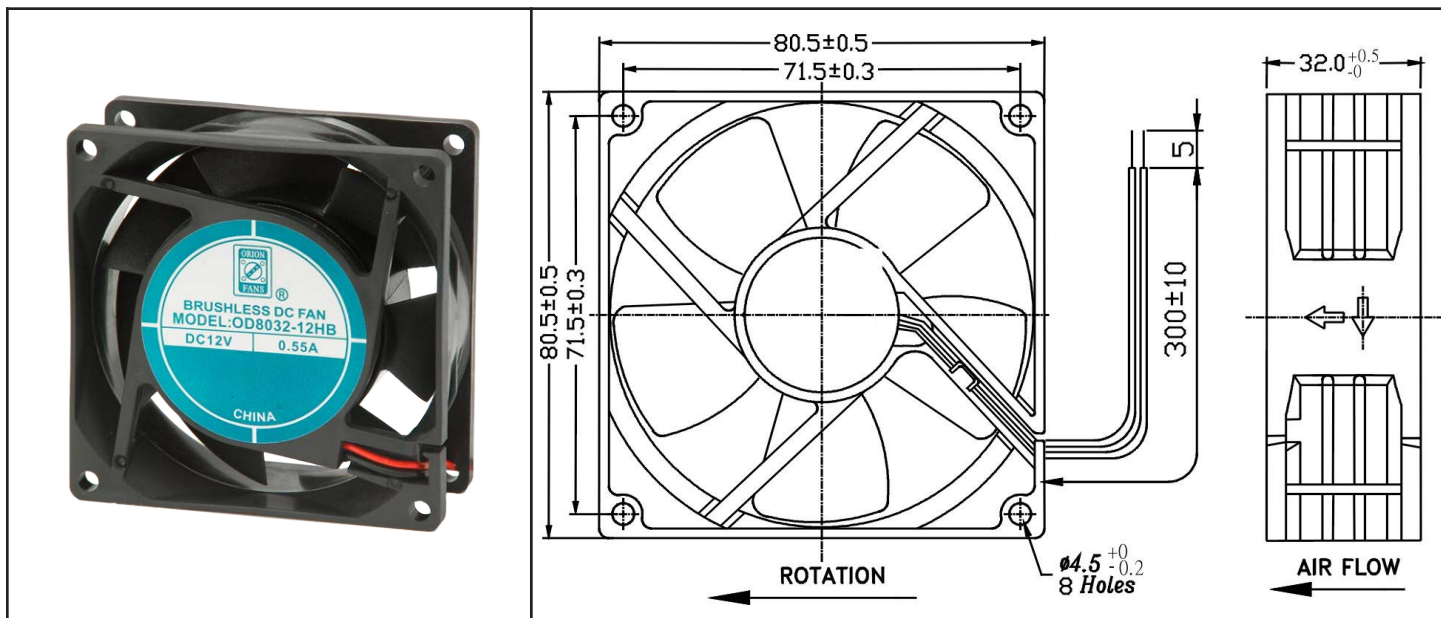


Frame & Impeller	PBT, UL94V-0 plastic	<u>Available Options</u> IP55 Other speeds and voltages Tachometer PWM Alarm *Connection: Wire Leads - UL1007 24AWG Red(+), Black (-),  Weight: 108 g	
Connection	2x Lead wires *		
Motor	Brushless DC, auto restart, polarity protected.		
Bearing System	Dual ball bearing		
Insulation Resistance	Min. 10M at 500VDC		
Dielectric Strength	1 second at 500VAC max leakage 500 microamp		
Temperature Range	-10C ~ +70C		
Storage Temperature	-40C ~ +80C		
Life (L10)	70,000 hours (40C)		

Model Number	OD8032-24HHB
Part Number	184251001
Nominal Voltage	24 VDC
Voltage Range	17~26.4 VDC
Nominal Current	.15 A
Rated Power	4.32 Watts
Rated Speed (RPM)	4200
Airflow (CFM)	55.5
Noise Level (dB)	44
Max. Static Pressure	.32 "H <sub>2</sub> O


# OD8032-24HHB02A



DC Fan, 24VDC  
80x32mm (3.15x1.25in)

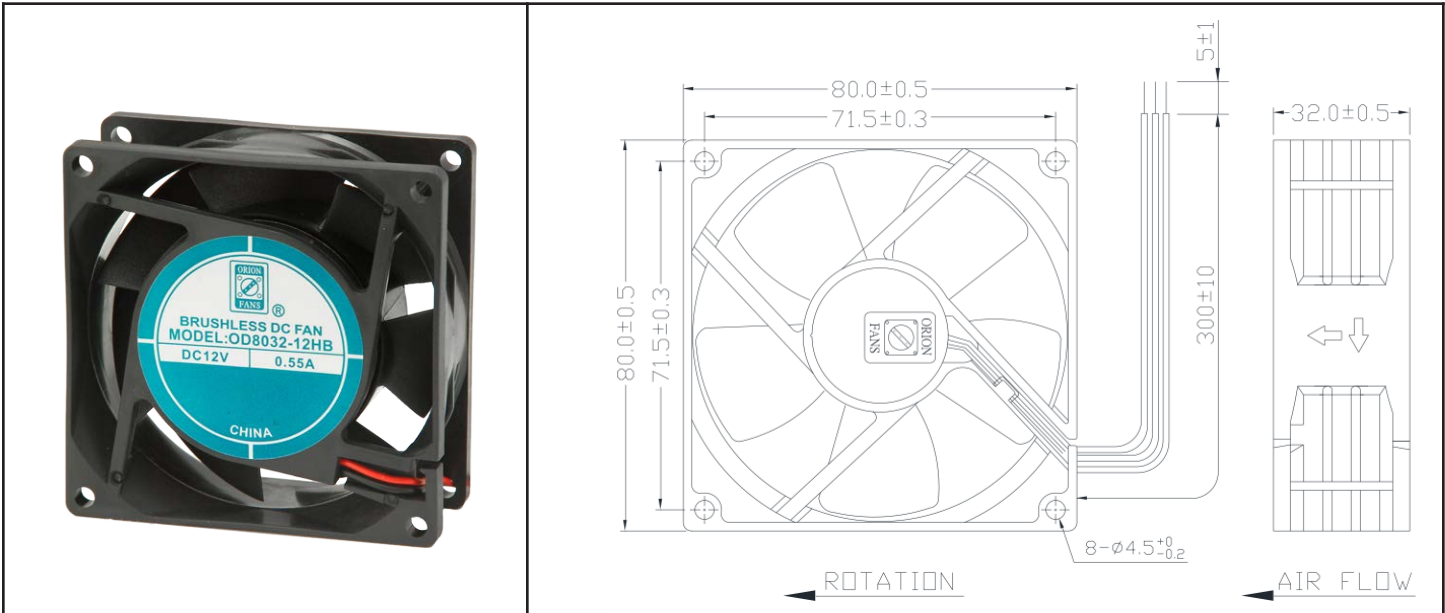

Frame & Impeller	PBT, UL94V-0 plastic	<b>Available Options</b> IP55 Other speeds and voltages Tachometer PWM  *Connection: Wire Leads - UL1007 24AWG Red(+), Black (-), Yellow Alarm  Weight: 108 g
Connection	3x Lead wires *	
Motor	Brushless DC, auto restart, polarity protected.	
Bearing System	Dual ball bearing	
Insulation Resistance	Min. 10M at 500VDC	
Dielectric Strength	1 second at 500VAC max leakage 500 microamp	
Temperature Range	-10C ~ +70C	
Storage Temperature	-40C ~ +80C	
Life (L10)	70,000 hours (40C)	

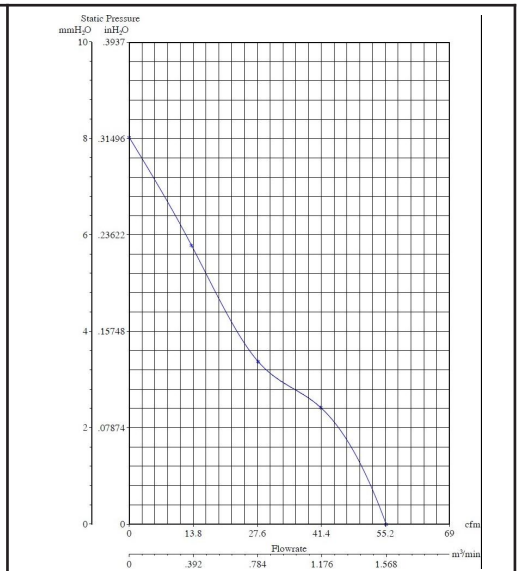

Model Number	OD8032-24HHB02A
Part Number	184251231
Nominal Voltage	24 VDC
Voltage Range	17~26.4 VDC
Nominal Current	.15 A
Rated Power	4.32 Watts
Rated Speed (RPM)	4200
Airflow (CFM)	55.5
Noise Level (dB)	44
Max. Static Pressure	.32 "H <sub>2</sub> O

Output of locked signal  
 \*Output type.....Open collector type  
 \*Electrical design suggestion:  
 (External signal function design is decided by customer)

\*Transistor Q1 at "ON" position  
 Collector current.....I<sub>c</sub>=10mA Max  
 Saturation Voltage.....V<sub>ce</sub>=1.0V Max  
 (Between Collector and Emitter at I<sub>c</sub>=10mA)  
 \*Transistor Q1 at "OFF" position  
 Release Voltage.....V<sub>on</sub>=30V Max

\*Output waveform