


1461492-2 Product Details

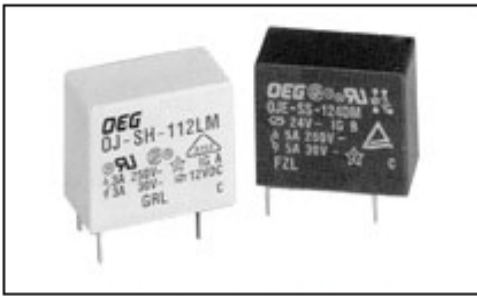

1461492-2 (OJT-SS-105LM)

TE Part Number: 1461492-2

 [Active](#)

 [Add to Part List](#)

Industrial Relays (General Purpose)

 [Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- OJE Series
- Contact Arrangement = 1 Form A, SPST-NO, 1 N/O
- Contact Current Rating = 5 Amps.
- Monostable Coil Magnetic System
- Without Coil Suppression Diode

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [OJT_SS_LM_000_CUSTOMER_DWG](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Schematic](#)
- [Wiring Diagram](#)
- [PCB Layout \(Bottom Surface\)](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Termination Type](#) = Through Hole

Electrical Characteristics:

- [Contact Current Rating \(Amps.\)](#) = 5
- [Coil Resistance \(Ω\)](#) = 55
- [Actuating System](#) = DC
- [Coil Power, Nominal \(W\)](#) = 0.45
- [Input Voltage \(VDC\)](#) = 5

Body Related Features:

- [Series](#) = OJE
- Polarized = No

Contact Related Features:

- [Mounting Options](#) = PC Board
- [Enclosure](#) = Flux-Tight
- FCC Part 68 Isolation = No
- Relay Type = PCB
- [Contact Material](#) = Silver Alloy
- Approx. Dimensions (L x W x H) (mm [in]) = 18.20 x 10.20 x 14.70 [.717 x .402 x .580]
- Approved Standards = UL Recognized, VDE Component Mark

Configuration Related Features:

- [Contact Arrangement](#) = 1 Form A, SPST-NO, 1 N/O
- [Coil Magnetic System](#) = Monostable
- [Coil Suppression Diode](#) = Without
- [Coil Selection Criteria](#) = Nominal Voltage
- Coil Latching = Without
- [LED Indicator](#) = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive

Packaging Related Features:

- Dielectric Between Coil and Contacts (kV) = 3

Other:

- Brand = OEG