

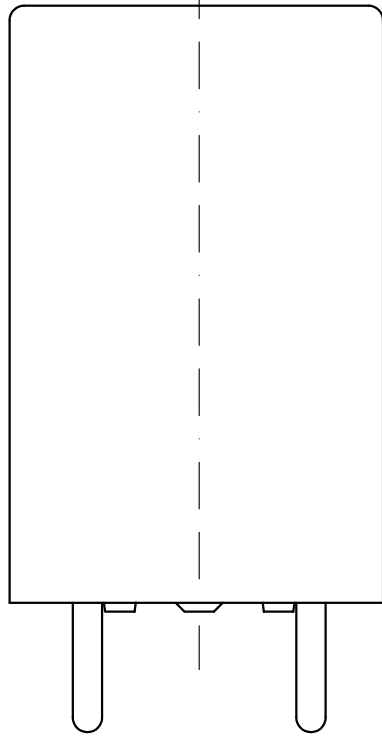


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC HH	DIST	REVISIONS						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
			B1	REACTIVE	ECO-06-022630	29-SEP-06	Y.X	N.F

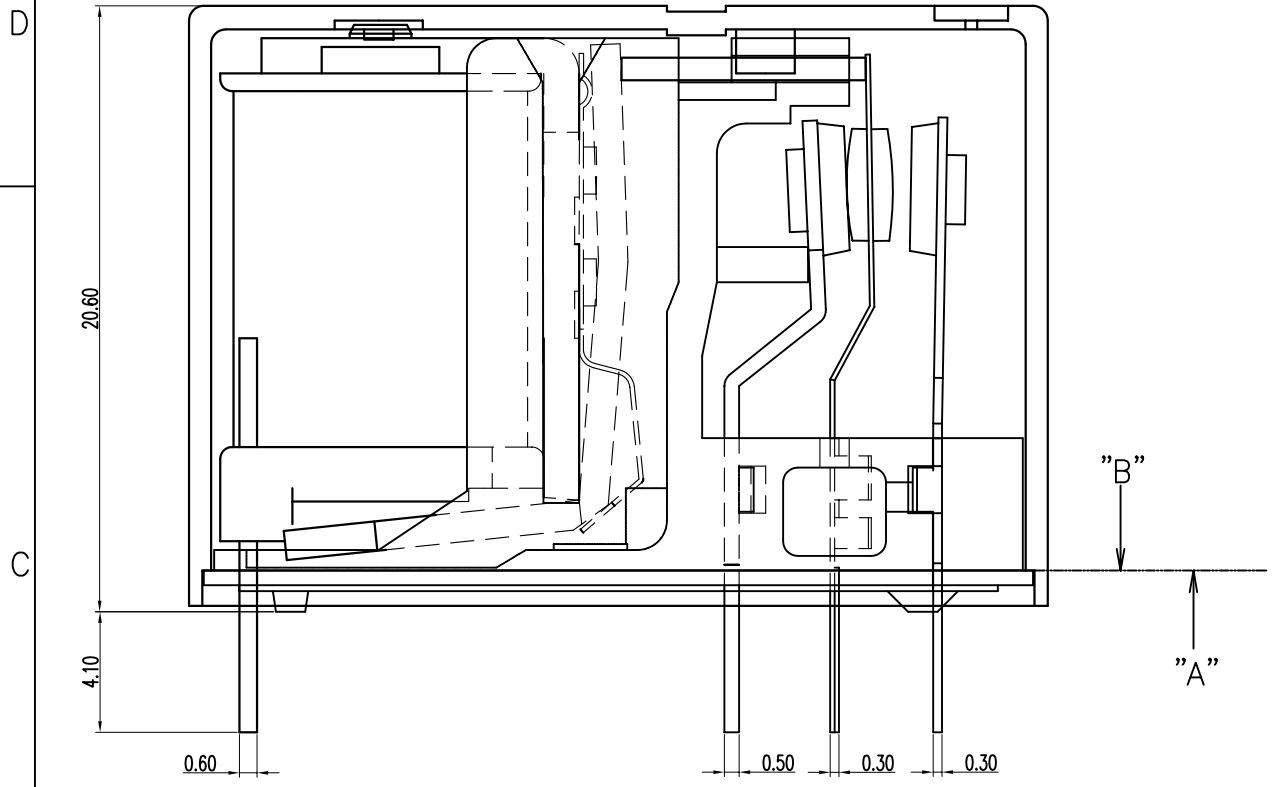


NOTE.
 1.PART "B" SHOULD FIT PART "A" AFTER CASE INSERTION PROCESS

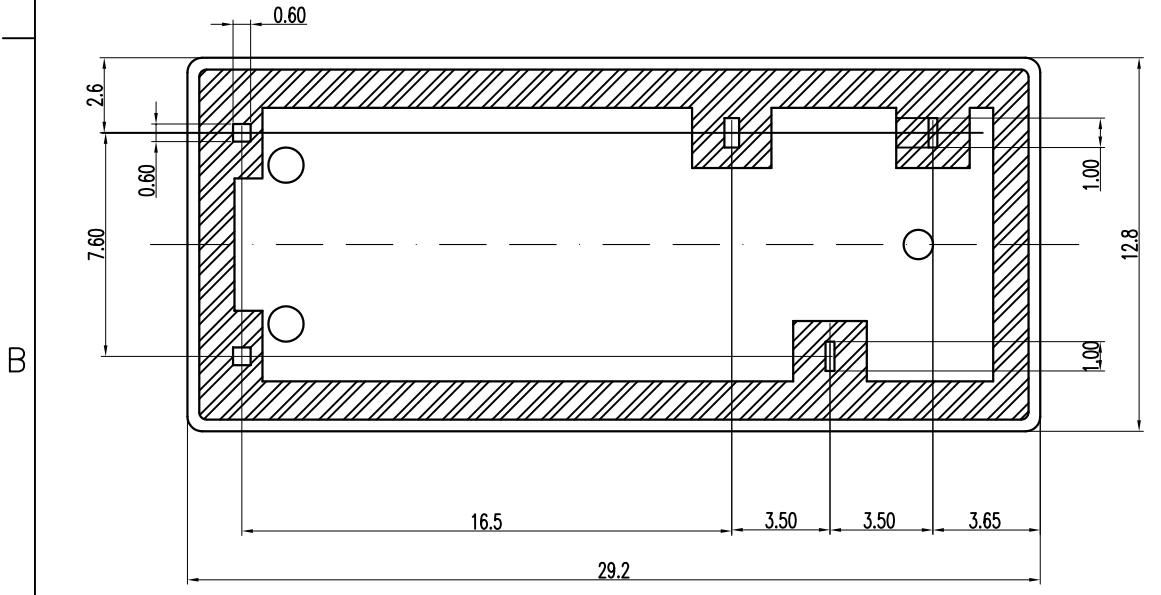

CONNECTION DIAGRAM
 (BOTTOM VIEW)



DRILLING DIAGRAM(2/1)
 (BOTTOM VIEW)

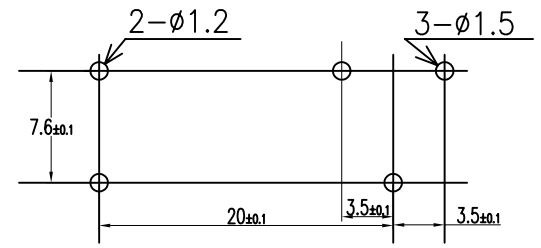


DIMENSION TOLERANCE	
MAX .1mm	±0.1
1mm~MAX.3mm	±0.2
MIN . 3mm	±0.3

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Yang.Xiao	Tyco Electronics EC K.K. Tochigi, Japan	
DIMENSIONS: mm		CHK N.Funayama		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HSU,CHIEN-HUI	NAME OMIH(1T) SPEC 094 CUSTOMER DRAWING	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		PRODUCT SPEC	APPLICATION SPEC	
MATERIAL SEE MATERIAL TABLE		FINISH	WEIGHT	RESTRICTED TO
		SIZE A3	GAGE CODE 00779	DRAWING NO 5-1419121-9
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 2	REV B1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC HH	DIST	REVISIONS						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD

VIEW "C"

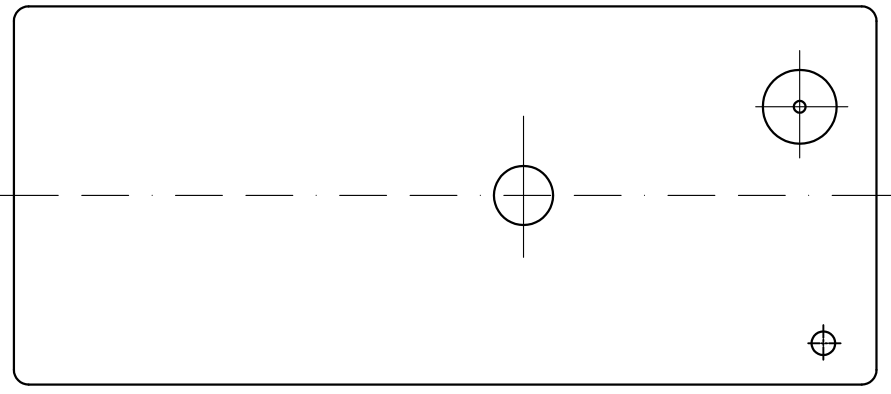


d	OMIH-SH-148L,094	7-1440000-6	OMIH-SH-148L	48V
c	OMIH-SH-124L,094	0-1440007-7	OMIH-SH-124L	24V
b	OMIH-SH-112L,094	5-1419121-9	OMIH-SH-112L	12V
a	OMIH-SH-112D,094	1-1419145-7	OMIH-SH-112D	12V
No.	EC TYPE NAE	AP PART NAE	PART A	PART B

RELAY TYPE

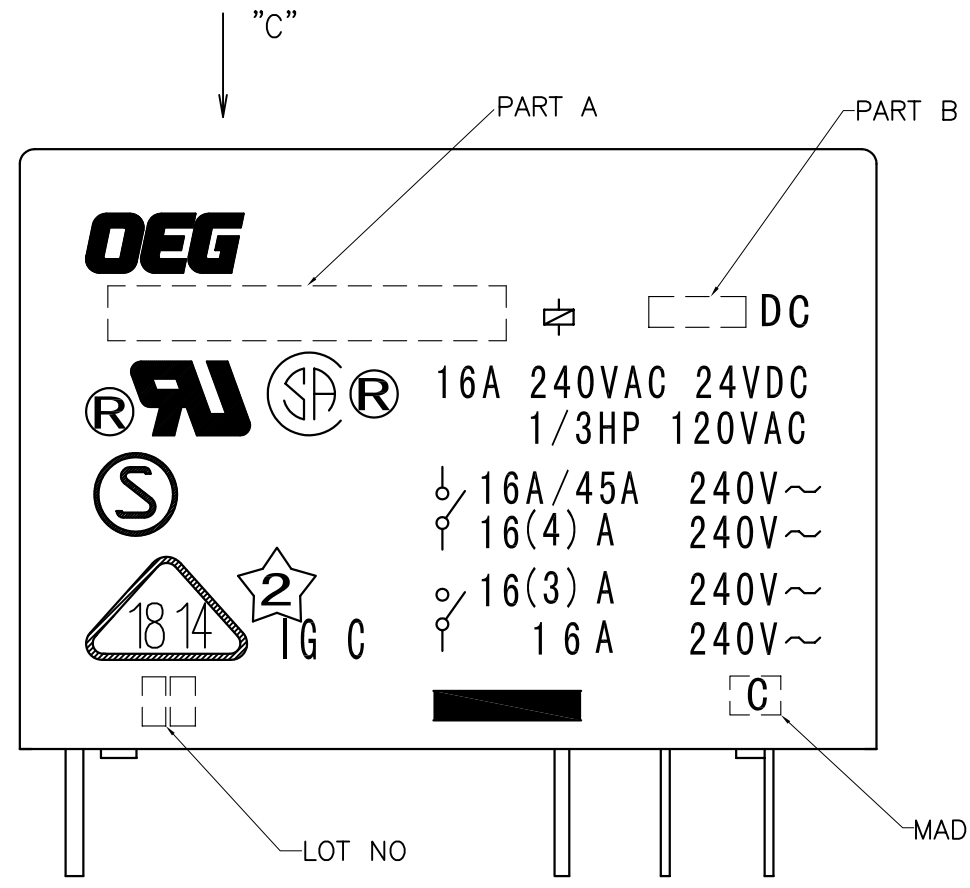

AR	AR	AR	AR			UV RESIN	UV SEAL	18
AR	AR	AR	AR			EPOXY RESIN	SEAL	17
AR	AR	AR	AR				TAPE	16
1	1	1	1	UL94 V-0		PBT	CASE	15
AR	AR	AR	AR	CLASS E		UEW	MAGNETIC WIRE	14
1	1	1	1	UL94 V-0		PET	BASE	13
1	1	1	1	UL94 V-0		PBT	BOBBIN	12
2	2	2	2		SOLDER DIP	CP WIRE	COIL TERMINAL	11
1	1	1	1	UL94 V-0		PPS	CARD	10
1	1	1	1			Aq ALLOY	MOVABLE CONTACT	9
2	2	2	2			Aq ALLOY	STATIONARY CONTACT	8
1	1	1	1			Cu ALLOY	HINGE SPRING	7
1	1	1	1		SOLDER DIP	Cu ALLOY	B TERMINAL	6
1	1	1	1		SOLDER DIP	Cu ALLOY	M TERMINAL	5
1	1	1	1		SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
1	1	1	1			STEEL	CORE	3
1	1	1	1			STEEL	ARMATURE	2
1	1	1	1			STEEL	YOKE	1
d	c	b	a	INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

NOTES:
 1. LOT NUMBERING SYSTEM AS FOLLOWS:



THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN YANG.XIAO	Tyco Electronics EC K.K. Tochigi, Japan	
DIMENSIONS: mm		CHK N.FUNAYAMA		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		APVD HSU,CHIEN-HUI	NAME OMIH(1T) SPEC 094 CUSTOMER DRAWING	
MATERIAL SEE MATERIAL TABLE		PRODUCT SPEC	RESTRICTED TO	
FINISH		APPLICATION SPEC	SIZE A3	GAGE CODE 00779
		WEIGHT	DRAWING NO. 5-1419121-9	SCALE 4:1
		CUSTOMER DRAWING	SHEET 2 OF 2	REV B1