

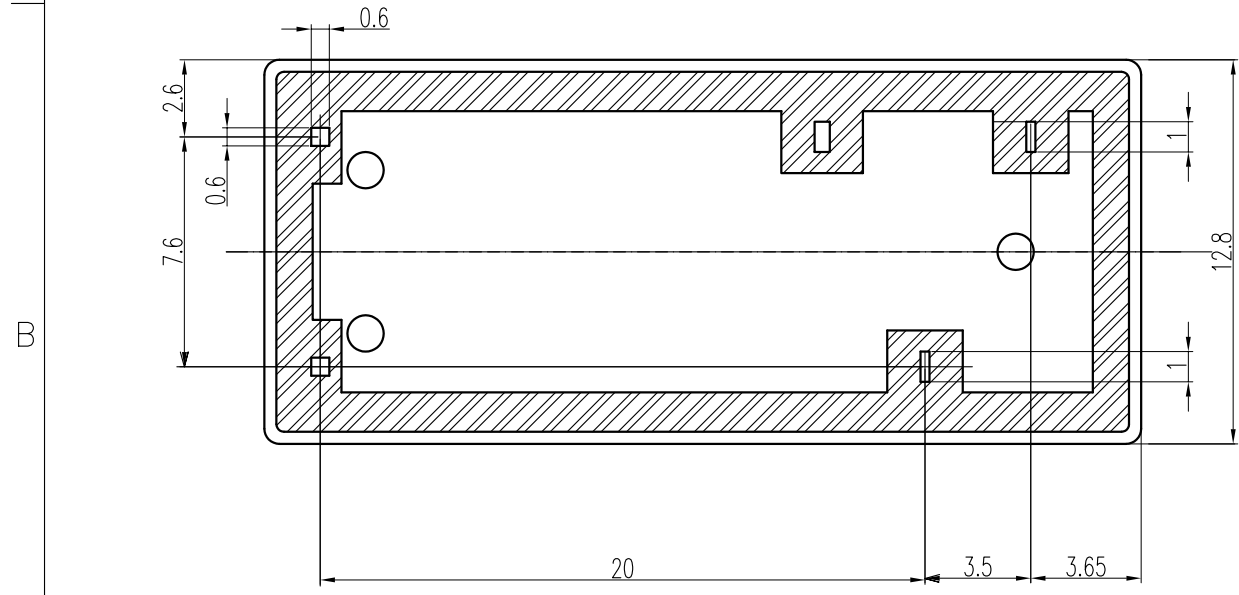
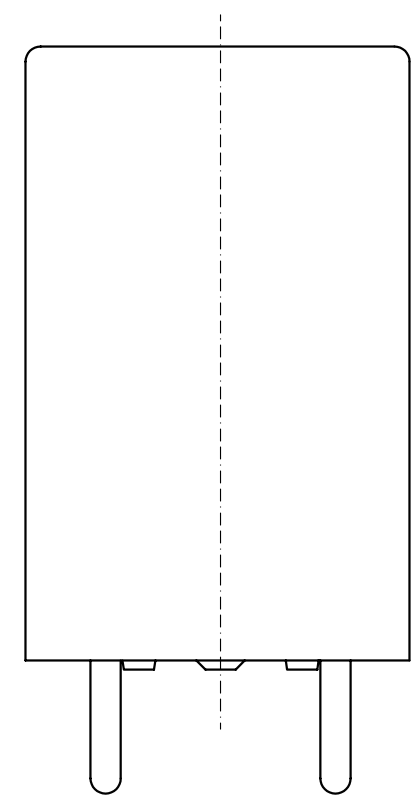


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS						
HH				P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
					A	RELEASE		20-MAR-06	Y.X	N.F

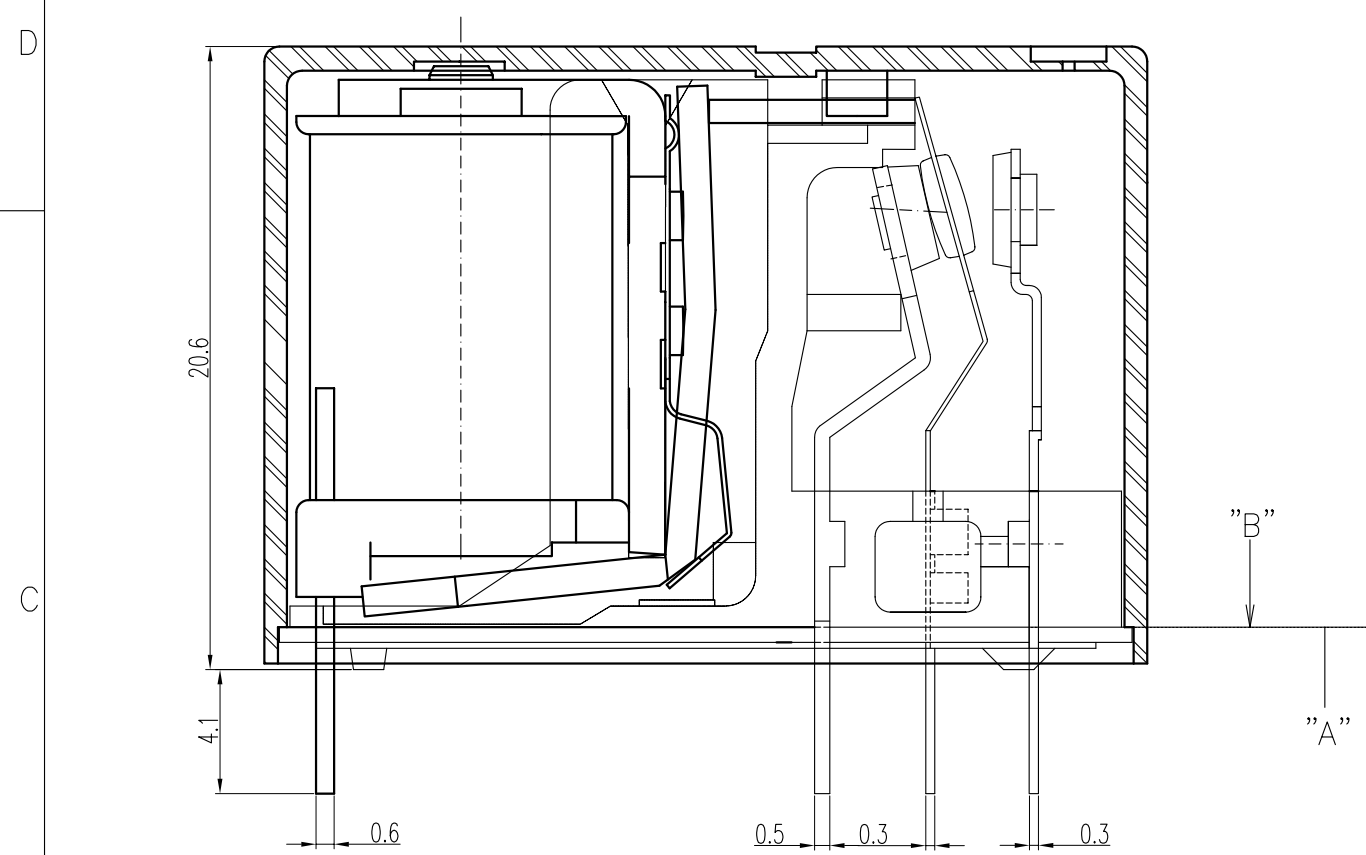

CONNECTION DIAGRAM
(BOTTOM VIEW)

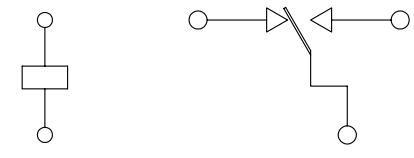


DRILLING DIAGRAM(2/1)
(BOTTOM VIEW)

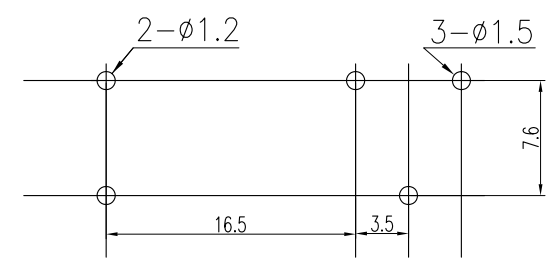

DIMENSION TOLERANCE	
MAX .1mm	±0.1
1mm~MAX.3mm	±0.2
MIN .3mm	±0.3

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Yang.Xiao	Tyco Electronics EC K.K. Tochigi, Japan			
DIMENSIONS: mm		CHK Zhang, xiaoning				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		APVD C.H.HSU	NAME			
MATERIAL SEE MATERIAL TABLE		FINISH	OMIT(1T) SPEC,000 CUSTOMER			
		PRODUCT SPEC	SIZE A3	GAGE CODE 00779	DRAWING NO C- 1440001-3	RESTRICTED TO
CUSTOMER DRAWING		WEIGHT	SCALE 4:1	SHEET 1 OF 2	REV A	


LOC HH	DIST	REVISIONS						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD

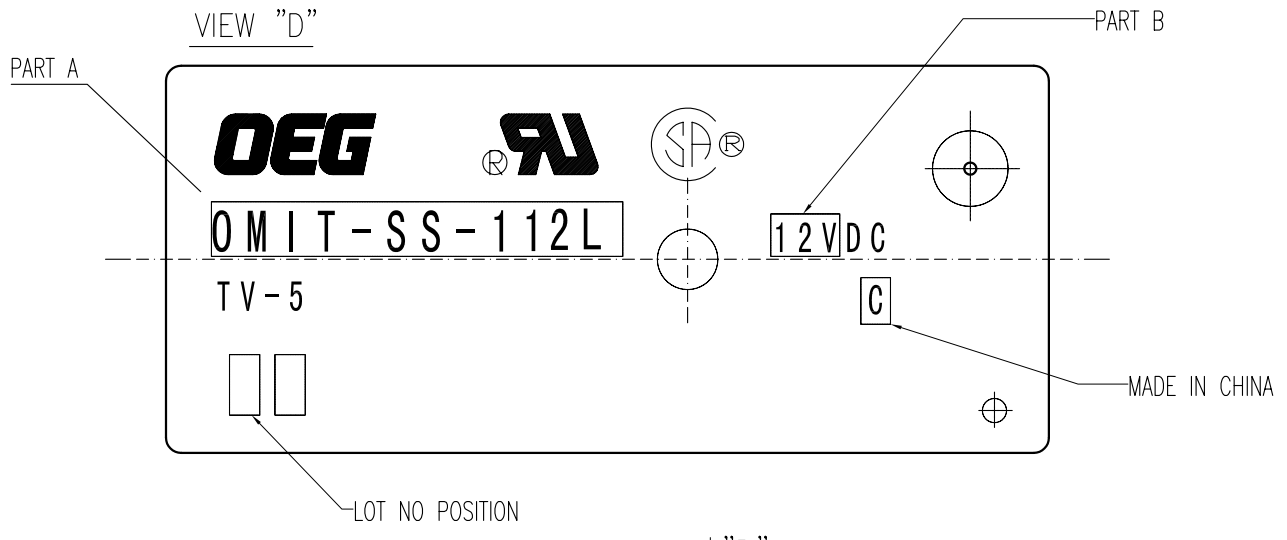


PART NO	PART A	PART B	EC TYPE NAME	No.
0-1461208-1	OMIT-SH-112L	12V	OMIT-SH-112L,300	e
0-1440001-3	OMIT-SS-112L	12V	OMIT-SS-112L,300	d
4-1419123-8	OMIT-SS-112L	12V	OMIT-SS-112L,000	c
9-1440000-9	OMIT-SS-105L	5V	OMIT-SS-105L,300	b
9-1440000-8	OMIT-SS-105L	5V	OMIT-SS-105L,000	a

RELAY TYPE

RELAY TYPE



NOTES:
 1.LOT NUMBERING SYSTEM AS FOLLOWS:



AR							UV RESIN	UV SEAL	17
AR	AR	AR	AR	AR			EPOXY RESIN	SEAL	17
		AR		AR			—	TAPE	16
1	1	1	1	1	UL94 V-0		PBT	CASE	15
AR	AR	AR	AR	AR	CLASS E		UEW	MAGNETIC WIRE	14
1	1	1	1	1	UL94 V-0		PET	BASE	13
1	1	1	1	1	UL94 V-0		PBT	BOBBIN	12
2	2	2	2	2		SOLDER DIP	CP WIRE	COIL TERMINAL	11
1	1	1	1	1	UL94 V-0		PPS	CARD	10
1	1	1	1	1			Ag ALLOY	MOVABLE CONTACT	9
2	2	2	2	2			Ag ALLOY	STATIONARY CONTACT	8
1	1	1	1	1			Cu ALLOY	HINGE SPRING	7
1	1	1	1	1		SOLDER DIP	Cu ALLOY	B TERMINAL	6
1	1	1	1	1		SOLDER DIP	Cu ALLOY	M TERMINAL	5
1	1	1	1	1		SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
1	1	1	1	1			STEEL	CORE	3
1	1	1	1	1			STEEL	ARMATURE	2
1	1	1	1				STEEL	YOKE	1
e	d	c	b	a	INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Yang.Xiao	Tyco Electronics EC K.K. Tochigi, Japan	
DIMENSIONS: mm		CHK Zhang, xiaoning		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		APVD C.H.HSU	NAME OMIT(1T) SPEC,000 CUSTOMER	
MATERIAL SEE MATERIAL TABLE		PRODUCT SPEC	RESTRICTED TO	
FINISH		APPLICATION SPEC	SIZE A3	GAGE CODE 00779
		WEIGHT	DRAWING NO 1440001-3	
		CUSTOMER DRAWING		SCALE 4:1
		SHEET 2 OF 2		REV A