

P26-Series

Pushbutton Switches

The P26-Series pushbutton switches are single pole, AC rated for 8 amps at 125 VAC and suitable for shallow back panel applications. These switches are momentary action with a medium actuation force (13 oz. typical). The P26-Series switch is equipped with a slow-make, slow-break contact mechanism. Typical applications include usage to control an alarm or warning devices, as well as test and measurement equipment.



Carling Technologies®

Innovative Designs. Powerful Solutions.

INNOVATIVE DESIGNS. POWERFUL SOLUTIONS.

Carling Technologies, Inc.
60 Johnson Avenue • Plainville, CT 06062-1177
Phone: (860) 793-9281 • Fax: (860) 793-9231
Email: sales@carlingtech.com • www.carlingtech.com

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life

25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

P26L - 1D - BL

¹ Base Part Number ² Bushing Style ³ Button Style/Color

1 BASE PART NUMBER: SERIES/POLES/CIRCUITRY/RATING/TERMINATION

| | Solder Lug | .250 Tab | Wire Leads |
|--|--------------|--------------|--------------|
| Single Pole | | | |
| 3A 250VAC, 6A 125 VAC, 3/4A 125V | | | |
| Off - (On) | P26A | P26B | P26F |
| On - (Off) | P26L | - | P26T |
| 3A 277VAC, 6A 125 VAC¹ | | | |
| Off - (On) | P267A | P267B | P267F |
| On - (Off) | P267L | - | P267T |

2 BUSHING STYLE


| | length | diameter |
|-----------|--------|----------|
| 1A | .406 | .375 |
| 1B | .406 | .468 |
| 1C | .465 | .375 |
| 1D | .465 | .468 |

3 BUTTON STYLE/COLOR

| | |
|----------------------------|---------------|
| BL | Black Nylon |
| RD | Red Nylon |
| RND MTL² | Round Metal |
| CON MTL² | Concave Metal |

Notes:

- 1 Additional ratings available. Consult factory for details.
- 2 Only available with 1D bushing in .502 length.
- () Indicates momentary function.

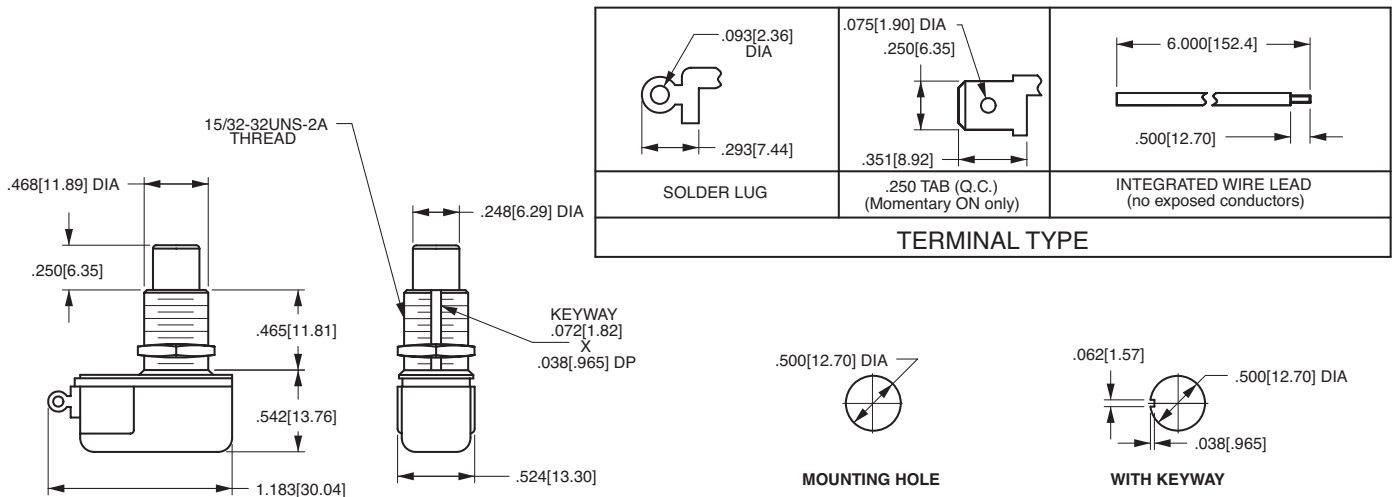

*Manufacturer reserves the right to change product specification without prior notice.