


P278, Film, Metallized Paper, Safety, 0.068 uF, 20%, 480 VAC (X1), 1000 VDC, 110°C, Lead Spacing = 20.3mm

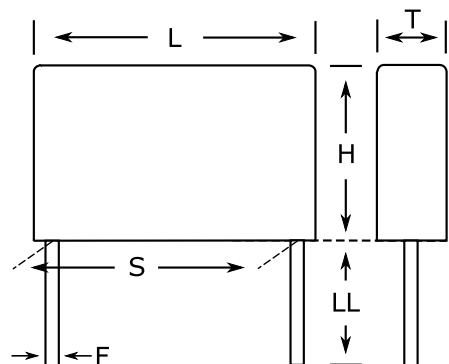

Dimensions

L	24mm MAX
H	16.5mm MAX
T	11.3mm MAX
S	20.3mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	150

General Information

Series:	P278
Dielectric:	Metallized Paper
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Safety Class:	X1
Qualifications:	ENEC, UL, cUL
AEC-Q200:	No
THB Performance:	No
Construction:	Molded
Component Weight:	6.3 g
Miscellaneous:	SRF= 6.2 MHz.

Specifications

Capacitance:	0.068 uF
Capacitance Tolerance:	20%
Voltage AC:	480 VAC (X1)
Voltage DC:	1000 VDC
Temperature Range:	-40/+110°C
Rated Temperature:	110°C
Dissipation Factor:	1.3% 1kHz
Insulation Resistance:	12 GOhms
Max dV/dt:	1000 V/us