





⚠ WARNING	
	<p style="text-align: center;">ELECTROCUTION HAZARD</p> <p>Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.</p>
	<p style="text-align: center;">FIRE HAZARD</p> <p>Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.</p>

SPECIFICATIONS:

INPUT:	50/60Hz (SEE TABLE BELOW FOR INPUT VOLTAGE)
OUTPUT:	24V CT, (SEE OUTPUT AMP RATING & VA CAPACITY IN TABLE)
INSULATION RATING:	CLASS A (105°C)
TEMPERATURE RISE:	65°C RISE ABOVE 40°C AMBIENT
DIELECTRIC STRENGTH:	1500 VRMS

NOTE:

1. All leads 8" minimum length.

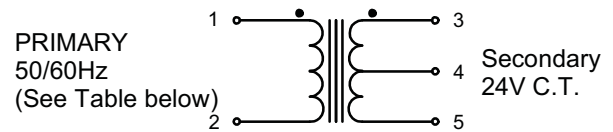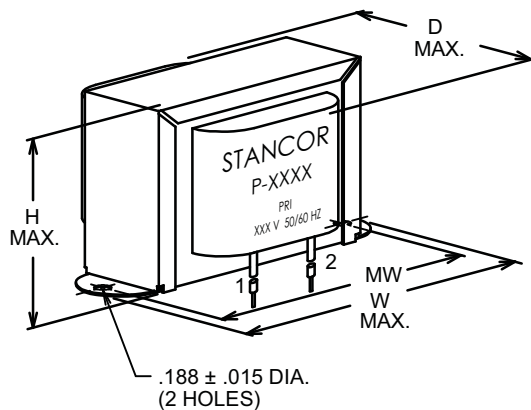

Schematic Diagram

STANCOR PART NUMBER	Pri. Volts	Sec. Curr.	V.A. Cap.	Dimensions - Inches				Wt. Lbs.	U.L. Recog.	Pri. Leads Color		Sec. Leads Color		
				H	W	D	MW			#1	#2	#3	#4 (C.T.)	#5
P-8394	117	.085A	2.04	1.31	2.13	1.38	1.75	0.25	No	BLK	BLK	BLU	YEL	BLU
P-8395	117	.20A	4.8	1.44	2.44	1.5	2.00	0.35	Yes *	BLK	BLK	BLU	YEL	BLU
P-8721	230	.20A	4.8	1.44	2.44	1.5	2.00	0.35	No	BLK	BLK	BLU	YEL	BLU
P-8396	115	.40A	9.6	1.75	2.88	1.62	2.38	0.60	Yes *	BLK	BLK	GRN	YEL	GRN
P-8722	230	.40A	9.6	1.75	2.88	1.62	2.38	0.60	No	BLK	BLK	GRN	YEL	GRN
P-8397	117	.70A	16.8	2.06	3.31	1.88	2.81	0.85	Yes *	BLK	BLK	GRN	YEL	GRN
P-8723	230	.70A	16.8	2.06	3.31	1.88	2.81	0.85	No	BLK	BLK	GRN	YEL	GRN

* Recognized to UL Standard 506, File No. E68100