


PANDUCT® Type PE — Polycarbonate Slotted Wall Wiring Duct



Type PE—Polycarbonate Slotted Wall Wiring Duct

- Made of Polycarbonate material—for low halogen, low smoke applications (see [page 34](#) for material specifications)
- Rated for continuous use temperatures up to 125°C (257°F)
- Available in clear only
- Provided with standard mounting holes (dims see [pg. 31](#))
- Available without mounting holes (See ordering info below)
- Available with adhesive backing* (See [page 22](#) for details)

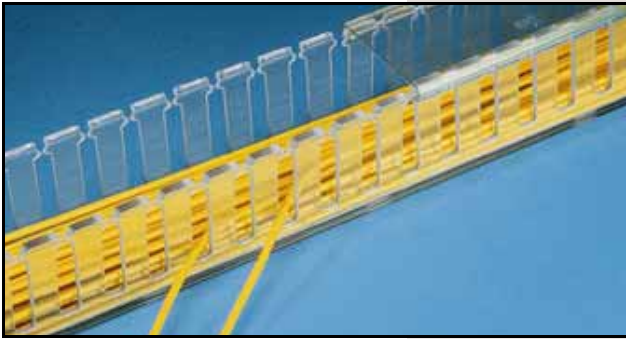

Type PE— Wiring Duct Standard Colors†:

CL
Clear


Duct Part Number	Duct External Dimensions		Cover Part Number	Std. Ctn. Qty.	Std. Ctn. Qty.	Std. Lgth
	WxH IN.	WxH (mm)				
PE.75X1CL6	0.88 x 1.06	(22.4) x (26.9)	PC.75CL6	120 ft.	120 ft.	6 ft.
> PE1X2CL6	1.14 x 2.12	(29.0) x (53.8)	PC1CL6	120 ft.	120 ft.	6 ft.
> PE1X3CL6	1.14 x 3.12	(29.0) x (79.2)	PC1CL6	120 ft.	120 ft.	6 ft.
PE1.5X1.5CL6	1.64 x 1.62	(41.7) x (41.1)	PC1.5CL6	120 ft.	120 ft.	6 ft.
PE2X1.5CL6	2.14 x 1.62	(54.4) x (41.1)	PC2CL6	120 ft.	120 ft.	6 ft.
PE2X2CL6	2.14 x 2.12	(54.4) x (53.8)	PC2CL6	120 ft.	120 ft.	6 ft.
PE3X1.25CL6	3.14 x 1.37	(79.8) x (34.8)	PC3CL6	120 ft.	120 ft.	6 ft.
PE4X4CL6	4.14 x 4.12	(105.2) x (104.6)	PC4CL6	60 ft.	120 ft.	6 ft.

Polycarbonate raceway is not UL Recognized or CSA Certified

>For availability contact factory.

*Adhesive tape is not CSA Certified.

See [page 31](#) for complete listing of dimensions.



Ordering Information:

- Order number of feet required in multiples of 6 ft or Std. Carton quantities.
- To order duct without mounting holes, add NM to Part Number.
- To order with pressure-sensitive adhesive mounting tape applied, add -A to Part Number.
- Part Number shown for CL Clear

†Available in Clear only

Part Number Nomenclature —

PE	.75	X	1	CL	6
↑	↑		↑	↑	↑
type/style	nominal height (in)		nominal width (in)	color	length (ft)