



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.





LOC	DIST	REVISIONS 変更						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
HH		B		DELETE "S" IN LOT NO.	FK00-0046-04	08-APR-04	R. Y	MJ. H

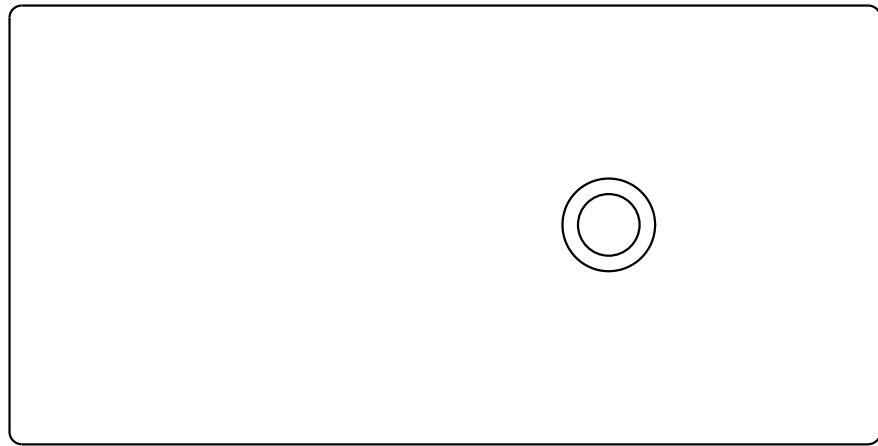

CONNECTION DIAGRAM (BOTTOM VIEW)  
 接続図 (2:1)

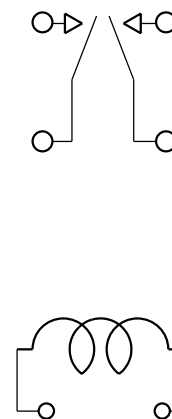

DRILLING DIAGRAM  
 フリット基板加工図 (2:1)

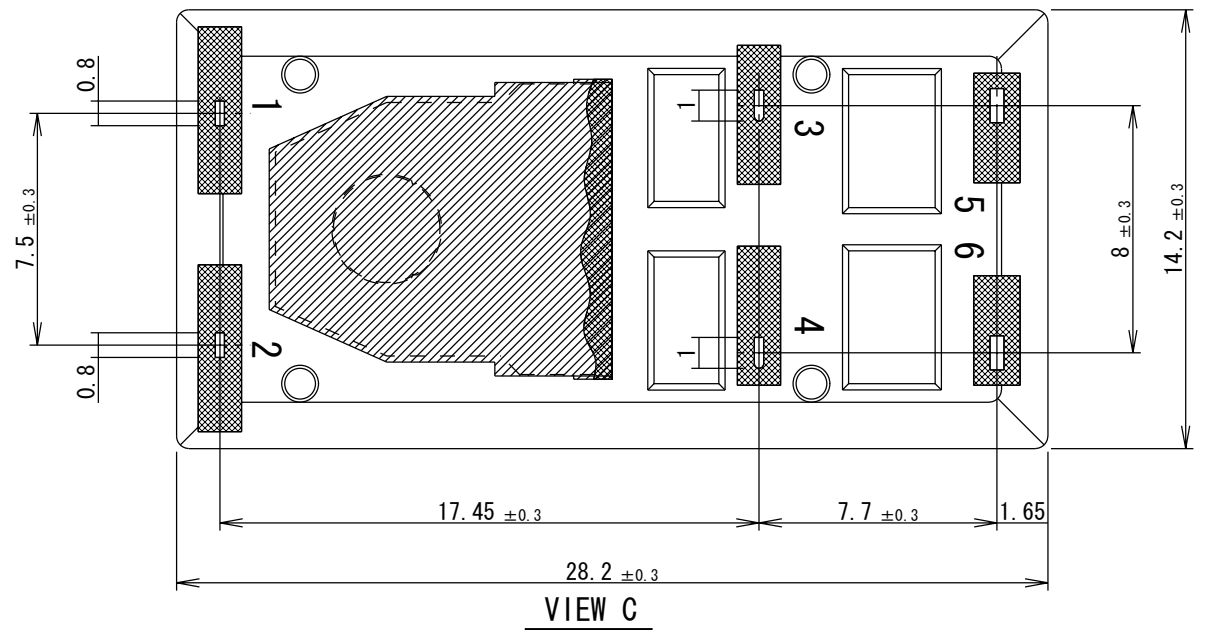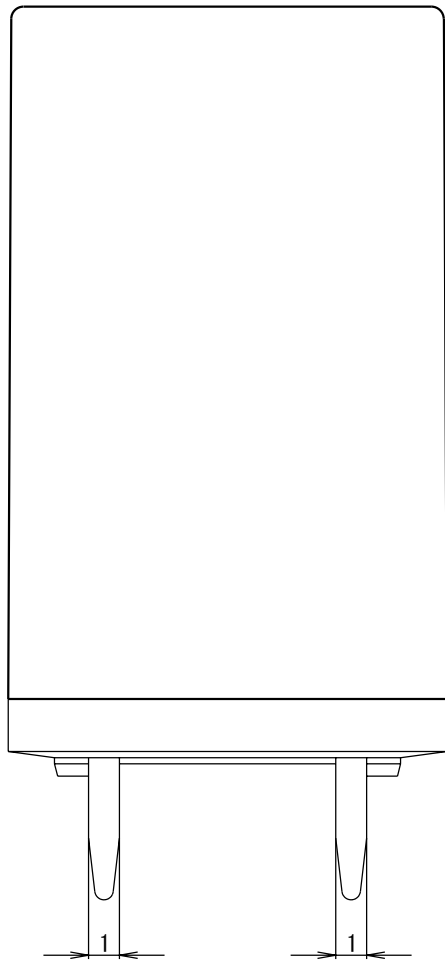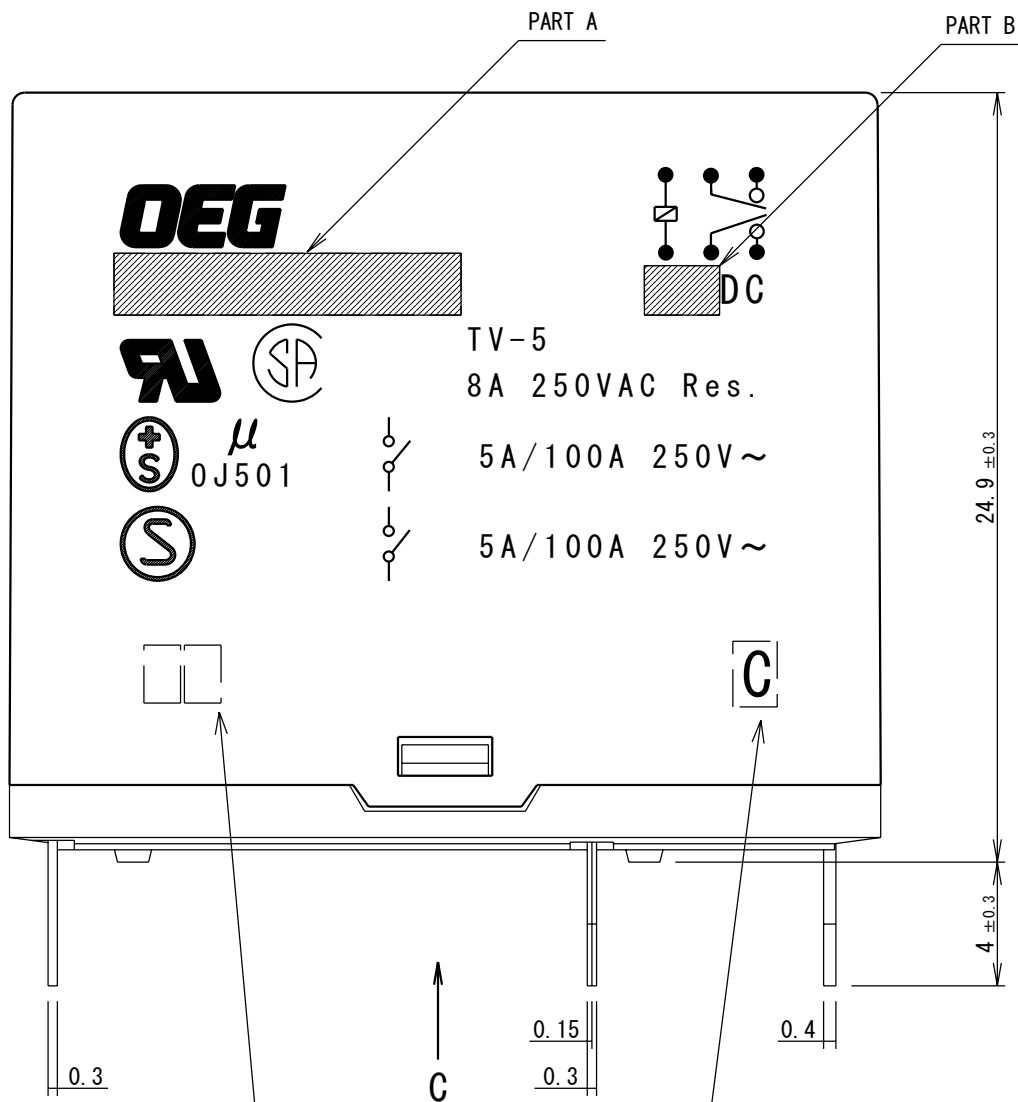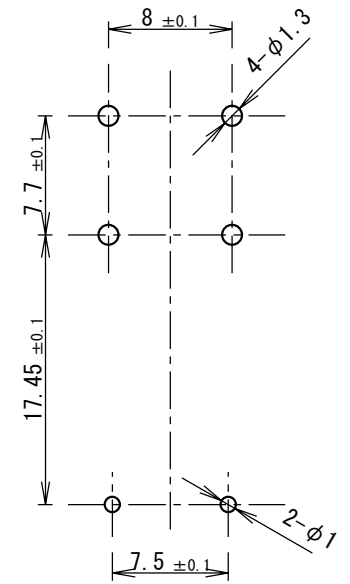

Lot No. MARKING AREA (B) C:MADE IN CHINA

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	H. SASAKI			Tyco Electronics EC K. K. Tochigi, Japan
DIMENSIONS: 単位: 耗 mm		CHK	N. FUNAYAMA			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A. NAGAI			NAME 名称
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 製品規格	SEE PRODUCT SPEC TABLE			PCG,000 STANDARD CUSTOMER DRAWING
MATERIAL 材料		APPLICATION SPEC 取付通用規格				SIZE A3
FINISH 仕上		WEIGHT				CAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO 番号	4-1440007-1	
		SCALE 尺度		SHEET 1 OF 2		RESTRICTED TO —
		4:1		REV B		

LOC	DIST	REVISIONS 変更					
HH		P	LTR	DESCRIPTION	DATE	DWN	APVD

1461946-1	PCG-206L2MN, 000	—	6V	PCG-206L2MN	h
3-1419153-6	PCG-212L2MN, 000	108-79643	12V	PCG-212L2MN	g
6-1440002-0	PCG-205L2MN, 000	108-79642	5V	PCG-205L2MN	f
4-1440007-2	PCG-248D2MN, 000	108-79399	48V	PCG-248D2MN	e
7-1419126-2	PCG-224D2MN, 000	108-79398	24V	PCG-224D2MN	d
6-1419126-8	PCG-212D2MN, 000	108-79397	12V	PCG-212D2MN	c
2-1419146-5	PCG-205D2MN, 000	108-79394	5V	PCG-205D2MN	b
4-1440007-1	PCG-203D2MN, 000	108-79393	3V	PCG-203D2MN	a
AMP PART NO	EC TYPE NAME	PRODUCT SPEC	PART B	PART A	TYPE

Ⓐ

RELAY TYPE

Ⓐ

AR	AR	AR	AR	AR	AR	AR	AR			EPOXY RESIN	SEAL (TERMINAL)	15
AR	AR	AR	AR	AR	AR	AR	AR			EPOXY RESIN	SEAL (BASE & BOBBIN)	14
1	1	1	1	1	1	1	1			3UEW	MAGNETIC WIRE	13
1	1	1	1	1	1	1	1	94V-0		P. B. T	CASE	12
1	1	1	1	1	1	1	1	94V-0		P. B. T	BOBBIN	11
2	2	2	2	2	2	2	2		SOLDER DIP	Cu ALLOY	COIL TERMINAL	10
1	1	1	1	1	1	1	1	94V-0		NYLON	CARD	9
2	2	2	2	2	2	2	2			Ag ALLOY	MOVABLE CONTACT	8
2	2	2	2	2	2	2	2			Ag ALLOY	STATIONARY CONTACT	7
1	1	1	1	1	1	1	1			STEEL	HINGE SPRING	6
2	2	2	2	2	2	2	2		SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	5
2	2	2	2	2	2	2	2		SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
1	1	1	1	1	1	1	1		NIP	STEEL	CORE	3
1	1	1	1	1	1	1	1		NIP	STEEL	ARMATURE	2
1	1	1	1	1	1	1	1		NIP	STEEL	YOKE	1
h	g	f	e	d	c	b	a	INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY TYCO ELECTRONICS CORPORATION.


THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT

DIMENSIONS:  
単位: 耗

TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 PLC ±
- 1 PLC ±
- 2 PLC ±
- 3 PLC ±
- 4 PLC ±
- ANGLES ±



DWN  
CHK  
APVD  
PRODUCT SPEC  
製品規格  
APPLICATION SPEC  
取付適用規格  
WEIGHT

MATERIAL  
材料  
FINISH  
仕上

**tyco**  
**Electronics**

Tyco Electronics EC K. K.  
Tochigi, Japan

PCG , 000 STANDARD CUSTOMER DRAWING

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A4	00779	Ⓒ- 4-1440007-1	—

CUSTOMER DRAWING

SCALE  
尺度

SHEET 2 OF 2

REV B