

INPUT

| parameter | conditions/description | min | typ | max | units |
|-----------------------------------|--|------|-----|------|-------|
| operating input voltage | 5 Vdc input models | 4.5 | 5 | 5.5 | Vdc |
| | 12 Vdc input models | 10.8 | 12 | 13.2 | Vdc |
| | 24 Vdc input models | 21.6 | 24 | 26.4 | Vdc |
| surge voltage | for maximum of 100 ms | | | | |
| | 5 Vdc input models | | | 9 | Vdc |
| | 12 Vdc input models | | | 18 | Vdc |
| | 24 Vdc input models | | | 30 | Vdc |
| current | 5 Vdc input models | | 500 | | mA |
| | 12 Vdc input models | | 210 | | mA |
| | 24 Vdc input models | | 110 | | mA |
| filter | capacitive | | | | |
| input reverse polarity protection | no | | | | |
| input fuse | 1 A time delay fuse for 5 Vdc input models (recommended) | | | | |
| | 500 mA time delay fuse for 12 Vdc input models (recommended) | | | | |
| | 250 mA time delay fuse for 24 Vdc input models (recommended) | | | | |

Notes: 1. Required to add a 2.2 μ F (5 & 12 Vdc input models) or 10 μ F (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.

OUTPUT

| parameter | conditions/description | min | typ | max | units |
|-------------------------|------------------------------|-----|-----|------------|-----------------|
| maximum capacitive load | at full load | | | 470 | μ F |
| voltage accuracy | | | | \pm 3.0 | % |
| line regulation | 1.0% change in input voltage | | | \pm 1.2 | % |
| load regulation | from full load to 20% load | | | \pm 10 | % |
| switching frequency | at nominal Vin, full load | | 80 | | kHz |
| temperature coefficient | | | | \pm 0.05 | %/ $^{\circ}$ C |

PROTECTIONS

| parameter | conditions/description | min | typ | max | units |
|--------------------------|------------------------|-----|-----|-----|-------|
| short circuit protection | momentary | | | 1 | s |

SAFETY AND COMPLIANCE

| parameter | conditions/description | min | typ | max | units |
|-----------------------|--|-------|-----------|-----|------------|
| isolation voltage | input to output for 1 minute | 1,000 | | | Vdc |
| isolation resistance | input to output | 1,000 | | | M Ω |
| isolation capacitance | input to output | | 15 | | pF |
| conducted emissions | EN 55022 Class A & Class B (external circuit required, see Figure 4) | | | | |
| MTBF | as per MIL-HDBK-217F, full load, GB, 25 $^{\circ}$ C | | 3,300,000 | | hours |
| RoHS | 2011/65/EU | | | | |


ENVIRONMENTAL

| parameter | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|--------------|
| operating temperature | see derating curve | -40 | | 100 | $^{\circ}$ C |
| storage temperature | | -55 | | 125 | $^{\circ}$ C |
| operating humidity | non-condensing | | | 95 | % |

SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|----------------|----------------------------|-----|-----|-----|-------|
| wave soldering | see wave soldering profile | | | 260 | °C |

- Notes:
1. Soldering materials: Sn/Cu/Ni
 2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
 3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
 4. Peak temperature: 260°C, above 250°C for 3~6 seconds
 5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

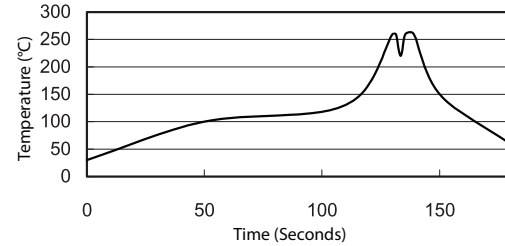



MECHANICAL

| parameter | conditions/description | min | typ | max | units |
|---------------|---|-----|-----|-----|--------|
| dimensions | 0.77 x 0.28 x 0.40 [19.6 x 7.2 x 10.2 mm] | | | | inches |
| case material | non-conductive black plastic | | | | |
| weight | | | 2.7 | | g |

MECHANICAL DRAWING

units: inches [mm]
 tolerance: X.XX ±0.01 [±0.25]
 X.XXX ±0.005 [±0.13]
 pin section tolerance: ±0.002[±0.05]


| PIN CONNECTIONS | | |
|-----------------|----------|--------|
| PIN | Function | |
| | Single | Dual |
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 4 | -Vout | -Vout |
| 5 | No pin | Common |
| 6 | +Vout | +Vout |

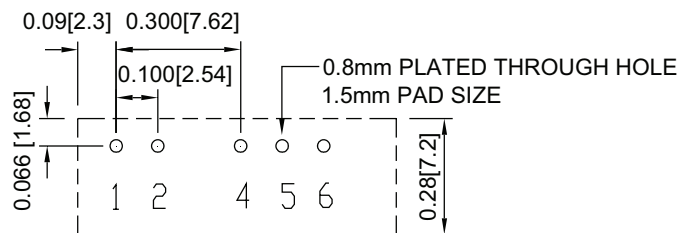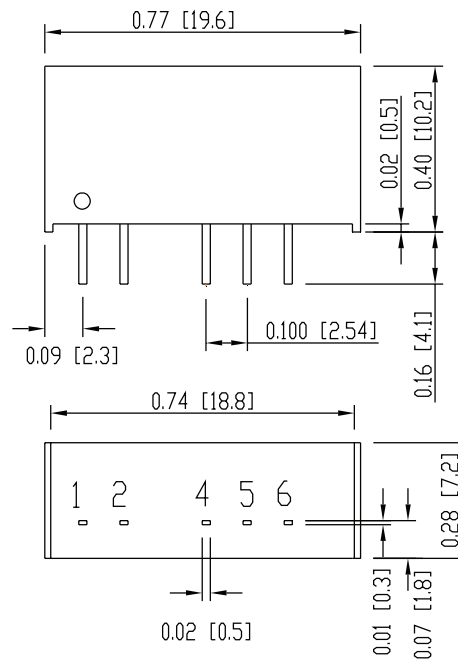

Recommended PCB Layout
Top View



DERATING CURVE

TEMPERATURE DERATING CURVE


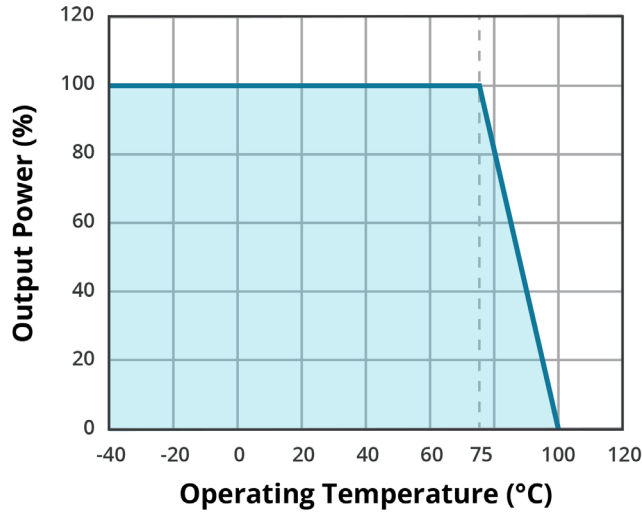


EFFICIENCY CURVES



**EFFICIENCY VS OUTPUT LOAD
PCN2-S5-S5-S**

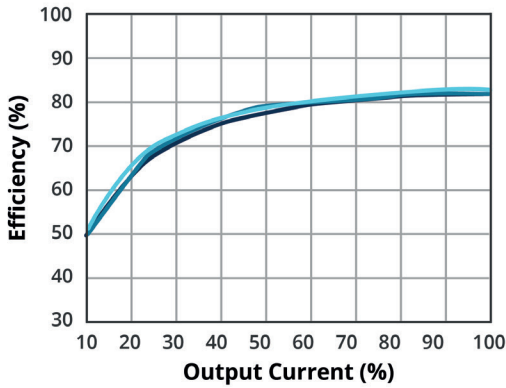



**EFFICIENCY VS OUTPUT LOAD
PCN2-S5-S12-S**

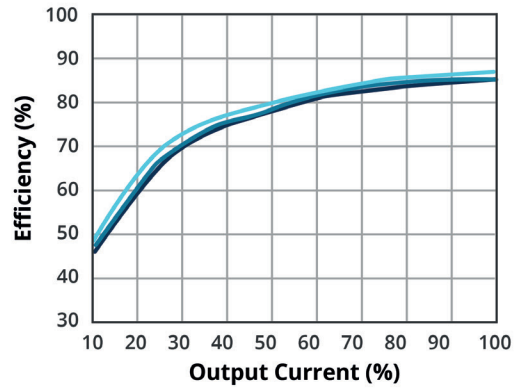

**EFFICIENCY VS OUTPUT LOAD
PCN2-S5-S15-S**


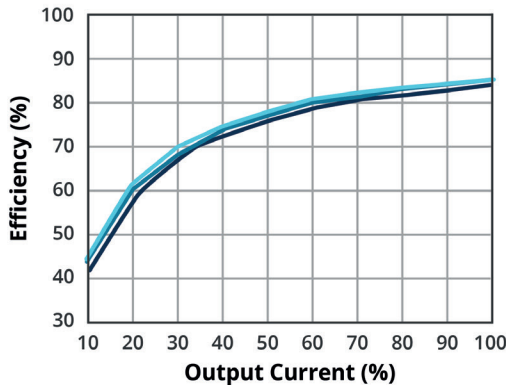


**EFFICIENCY VS OUTPUT LOAD
PCN2-S5-D5-S**


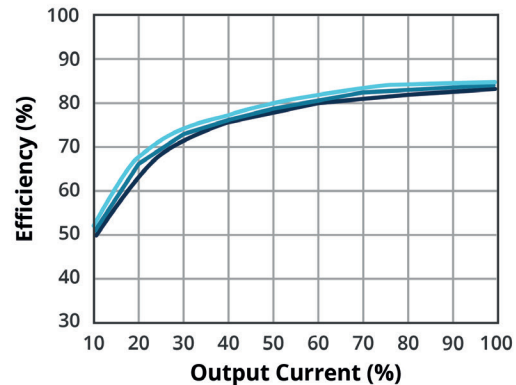


EFFICIENCY CURVES (CONTINUED)



**EFFICIENCY VS OUTPUT LOAD
PCN2-S5-D12-S**

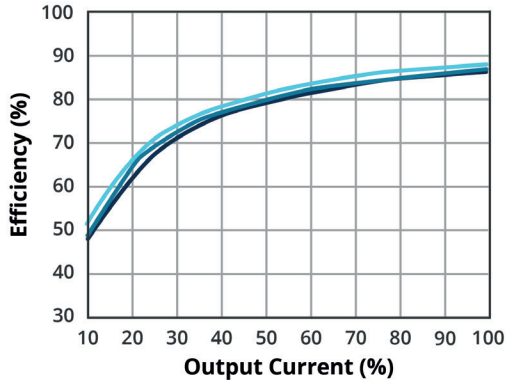


**EFFICIENCY VS OUTPUT LOAD
PCN2-S5-D15-S**

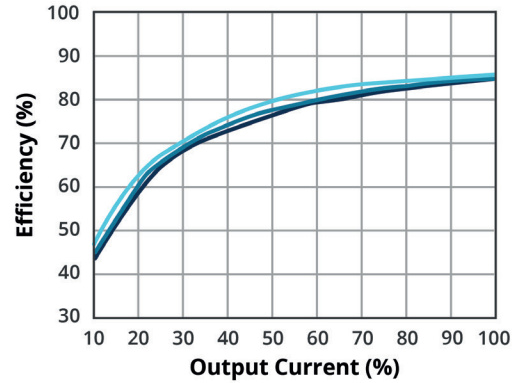



**EFFICIENCY VS OUTPUT LOAD
PCN2-S12-S5-S**

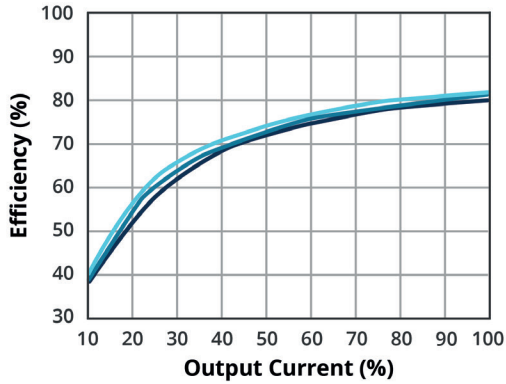



**EFFICIENCY VS OUTPUT LOAD
PCN2-S12-S12-S**

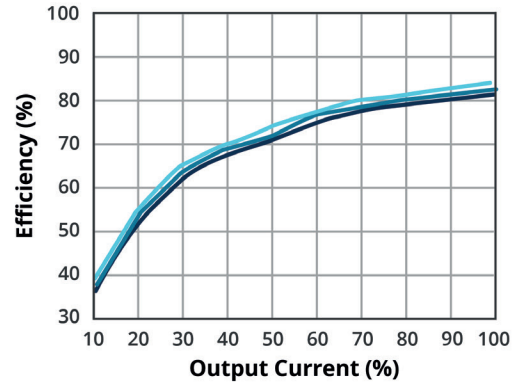

**EFFICIENCY VS OUTPUT LOAD
PCN2-S12-S15-S**


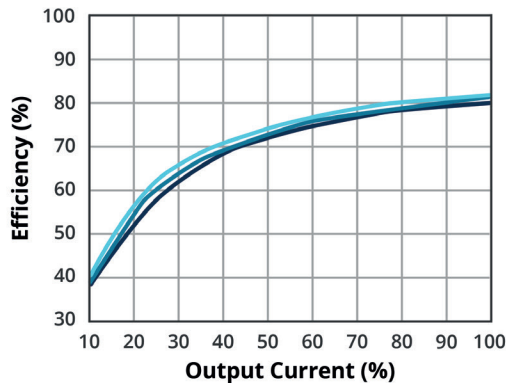


**EFFICIENCY VS OUTPUT LOAD
PCN2-S12-D5-S**


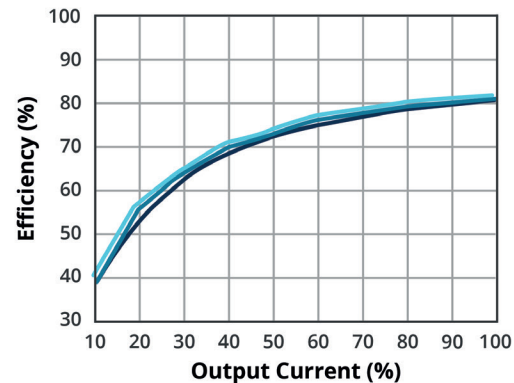


EFFICIENCY CURVES (CONTINUED)



**EFFICIENCY VS OUTPUT LOAD
PCN2-S12-D12-S**

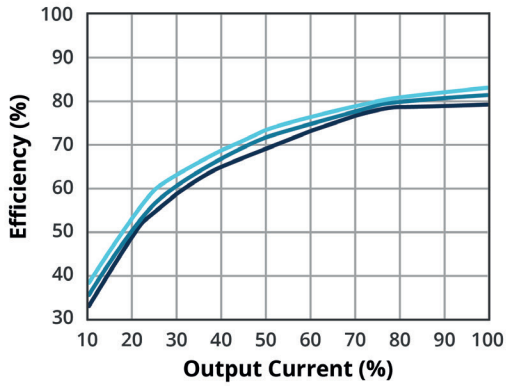



**EFFICIENCY VS OUTPUT LOAD
PCN2-S12-D15-S**

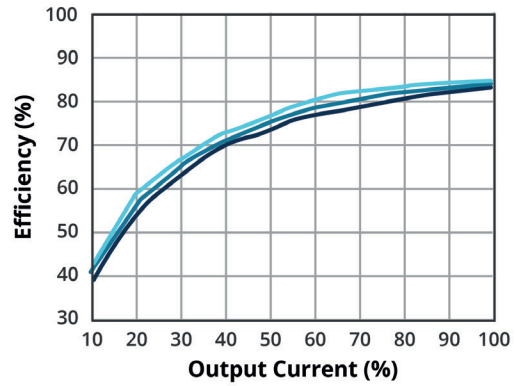



**EFFICIENCY VS OUTPUT LOAD
PCN2-S24-S5-S**

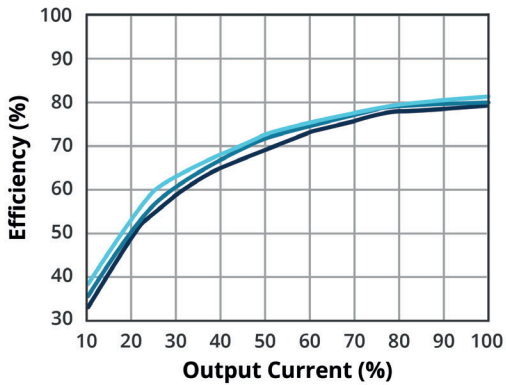



**EFFICIENCY VS OUTPUT LOAD
PCN2-S24-S12-S**

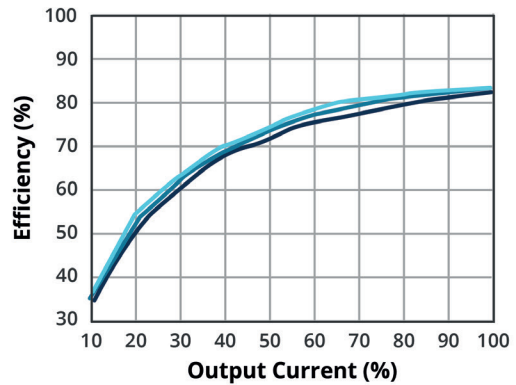



**EFFICIENCY VS OUTPUT LOAD
PCN2-S24-S15-S**

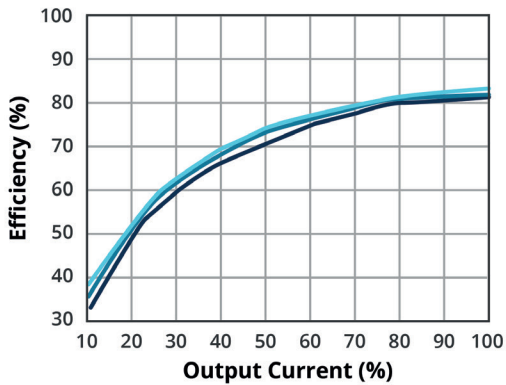

**EFFICIENCY VS OUTPUT LOAD
PCN2-S24-D5-S**

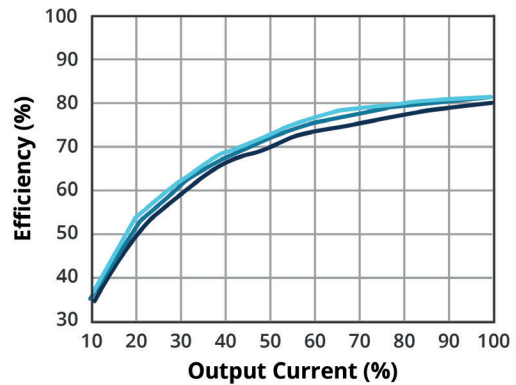

EFFICIENCY CURVES (CONTINUED)

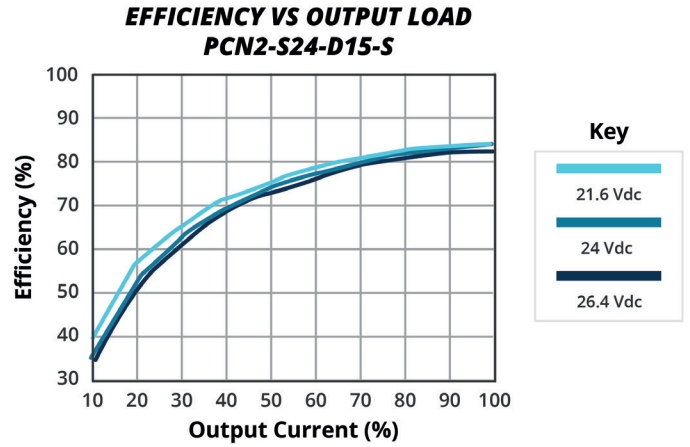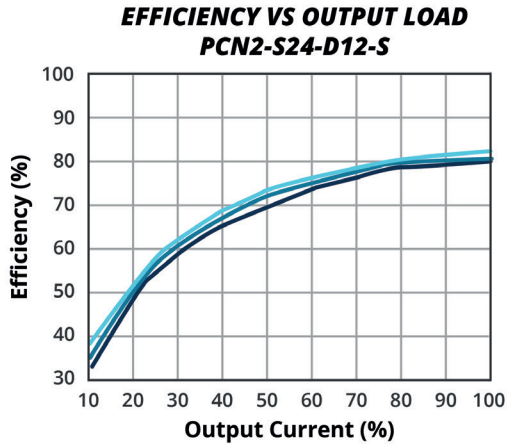


PACKAGING

units: mm

Tube size: 20 x 11 x 330 mm

QTY: 14 pcs

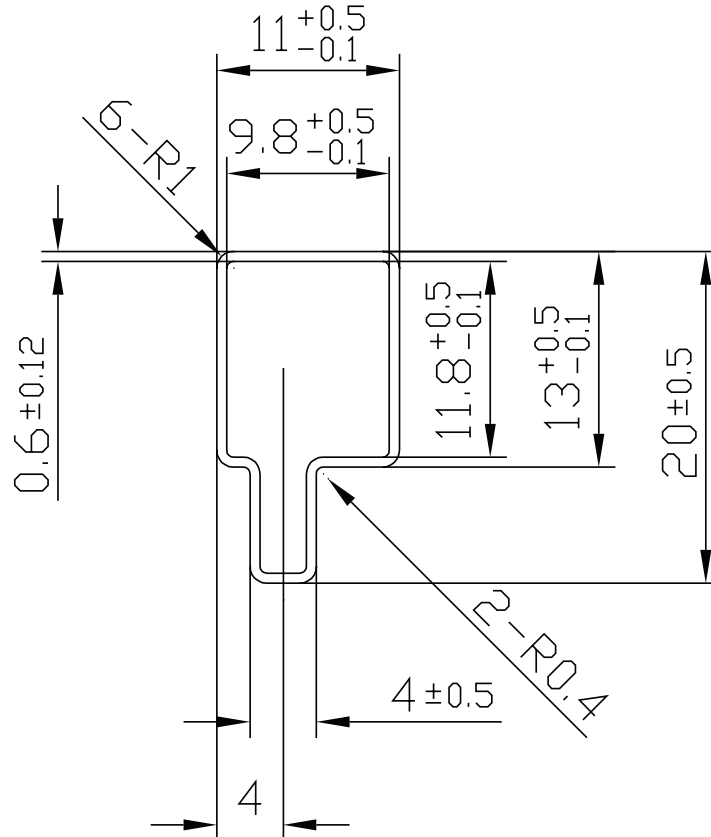

TEST CONFIGURATIONS

Input Ripple Current & Output Noise

Figure 1 Measuring Input Ripple Current

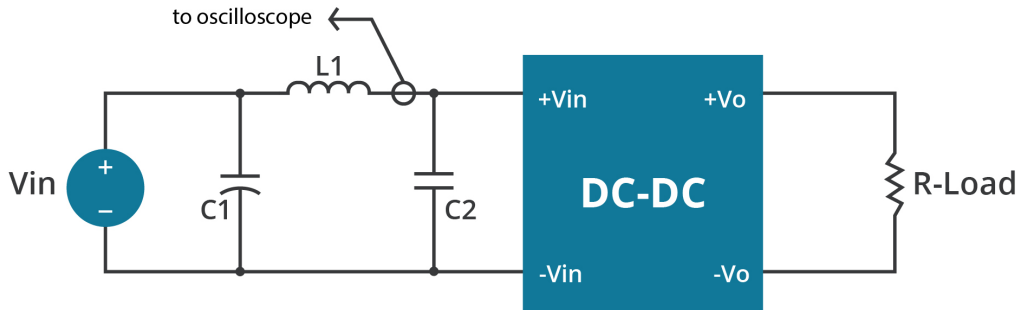


Table 1

| Input Voltage (Vdc) | L1 | C1 | C2 |
|---------------------|------------|--------------------------------|----|
| 5 | 12 μ H | 2.2 μ F tantalum capacitor | NC |
| 12 | 12 μ H | 2.2 μ F tantalum capacitor | NC |
| 24 | 12 μ H | 10 μ F ceramic capacitor | NC |

Figure 2 Measuring Output Ripple & Noise for Single Output Models

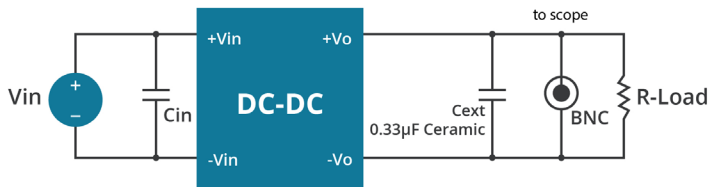


Figure 3 Measuring Output Ripple & Noise for Dual Output Models

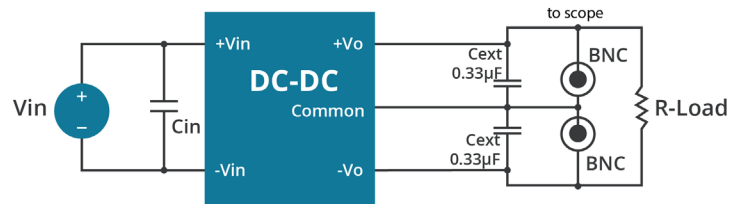


Table 2

| Input Voltage (Vdc) | Cin |
|---------------------|-------------------------------|
| 5 | 2.2 μ F ceramic capacitor |
| 12 | 2.2 μ F ceramic capacitor |
| 24 | 10 μ F ceramic capacitor |

EMC RECOMMENDED CIRCUIT

Test Condition

Input Voltage: Nominal

Output Load: Full Load

Figure 4 Conducted Emissions Test Circuit

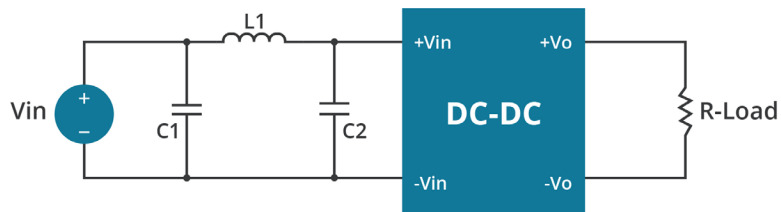


Table 3

| EN55022 Class A Recommended External Circuit Components | | | |
|--|-----------------|-----------------|--------|
| Model | C1 ¹ | C2 ¹ | L1 |
| PCN2-S5-S5-S | 4.7 μF / 50 V | NC | 2.2 μH |
| PCN2-S5-S12-S | 4.7 μF / 50 V | NC | 2.2 μH |
| PCN2-S5-S15-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S5-D5-S | 4.7 μF / 50 V | NC | 2.2 μH |
| PCN2-S5-D12-S | 4.7 μF / 50 V | NC | 2.2 μH |
| PCN2-S5-D15-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S12-S5-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S12-S12-S | 4.7 μF / 50 V | NC | 5.6 μH |
| PCN2-S12-S15-S | 4.7 μF / 50 V | NC | 5.6 μH |
| PCN2-S12-D5-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S12-D12-S | 4.7 μF / 50 V | NC | 5.6 μH |
| PCN2-S12-D15-S | 4.7 μF / 50 V | NC | 5.6 μH |
| PCN2-S24-S5-S | 4.7 μF / 50 V | 4.7 μF / 50 V | 5.6 μH |
| PCN2-S24-S12-S | 4.7 μF / 50 V | 4.7 μF / 50 V | 5.6 μH |
| PCN2-S24-S15-S | 4.7 μF / 50 V | 4.7 μF / 50 V | 5.6 μH |
| PCN2-S24-D5-S | 4.7 μF / 50 V | 4.7 μF / 50 V | 5.6 μH |
| PCN2-S24-D12-S | 4.7 μF / 50 V | 4.7 μF / 50 V | 5.6 μH |
| PCN2-S24-D15-S | 4.7 μF / 50 V | 4.7 μF / 50 V | 5.6 μH |

Table 4

| EN55022 Class B Recommended External Circuit Components | | | |
|--|-----------------|-----------------|--------|
| Model | C1 ¹ | C2 ¹ | L1 |
| PCN2-S5-S5-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S5-S12-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S5-S15-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S5-D5-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S5-D12-S | 10 μF / 25 V | NC | 5.6 μH |
| PCN2-S5-D15-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S12-S5-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S12-S12-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S12-S15-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S12-D5-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S12-D12-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S12-D15-S | 10 μF / 25 V | 10 μF / 25 V | 5.6 μH |
| PCN2-S24-S5-S | 10 μF / 50 V | 10 μF / 50 V | 5.6 μH |
| PCN2-S24-S12-S | 10 μF / 50 V | 10 μF / 50 V | 5.6 μH |
| PCN2-S24-S15-S | 10 μF / 50 V | 10 μF / 50 V | 5.6 μH |
| PCN2-S24-D5-S | 10 μF / 50 V | 10 μF / 50 V | 5.6 μH |
| PCN2-S24-D12-S | 10 μF / 50 V | 10 μF / 50 V | 5.6 μH |
| PCN2-S24-D15-S | 10 μF / 50 V | 10 μF / 50 V | 5.6 μH |

Notes: 1. Ceramic Capacitor

Notes: 1. Ceramic Capacitor

REVISION HISTORY

| rev. | description | date |
|------|---|------------|
| 1.0 | initial release | 07/26/2016 |
| 1.01 | company logo updated | 03/30/2021 |
| 1.02 | derating, efficiency curves and circuit figures updated | 07/09/2021 |

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.