
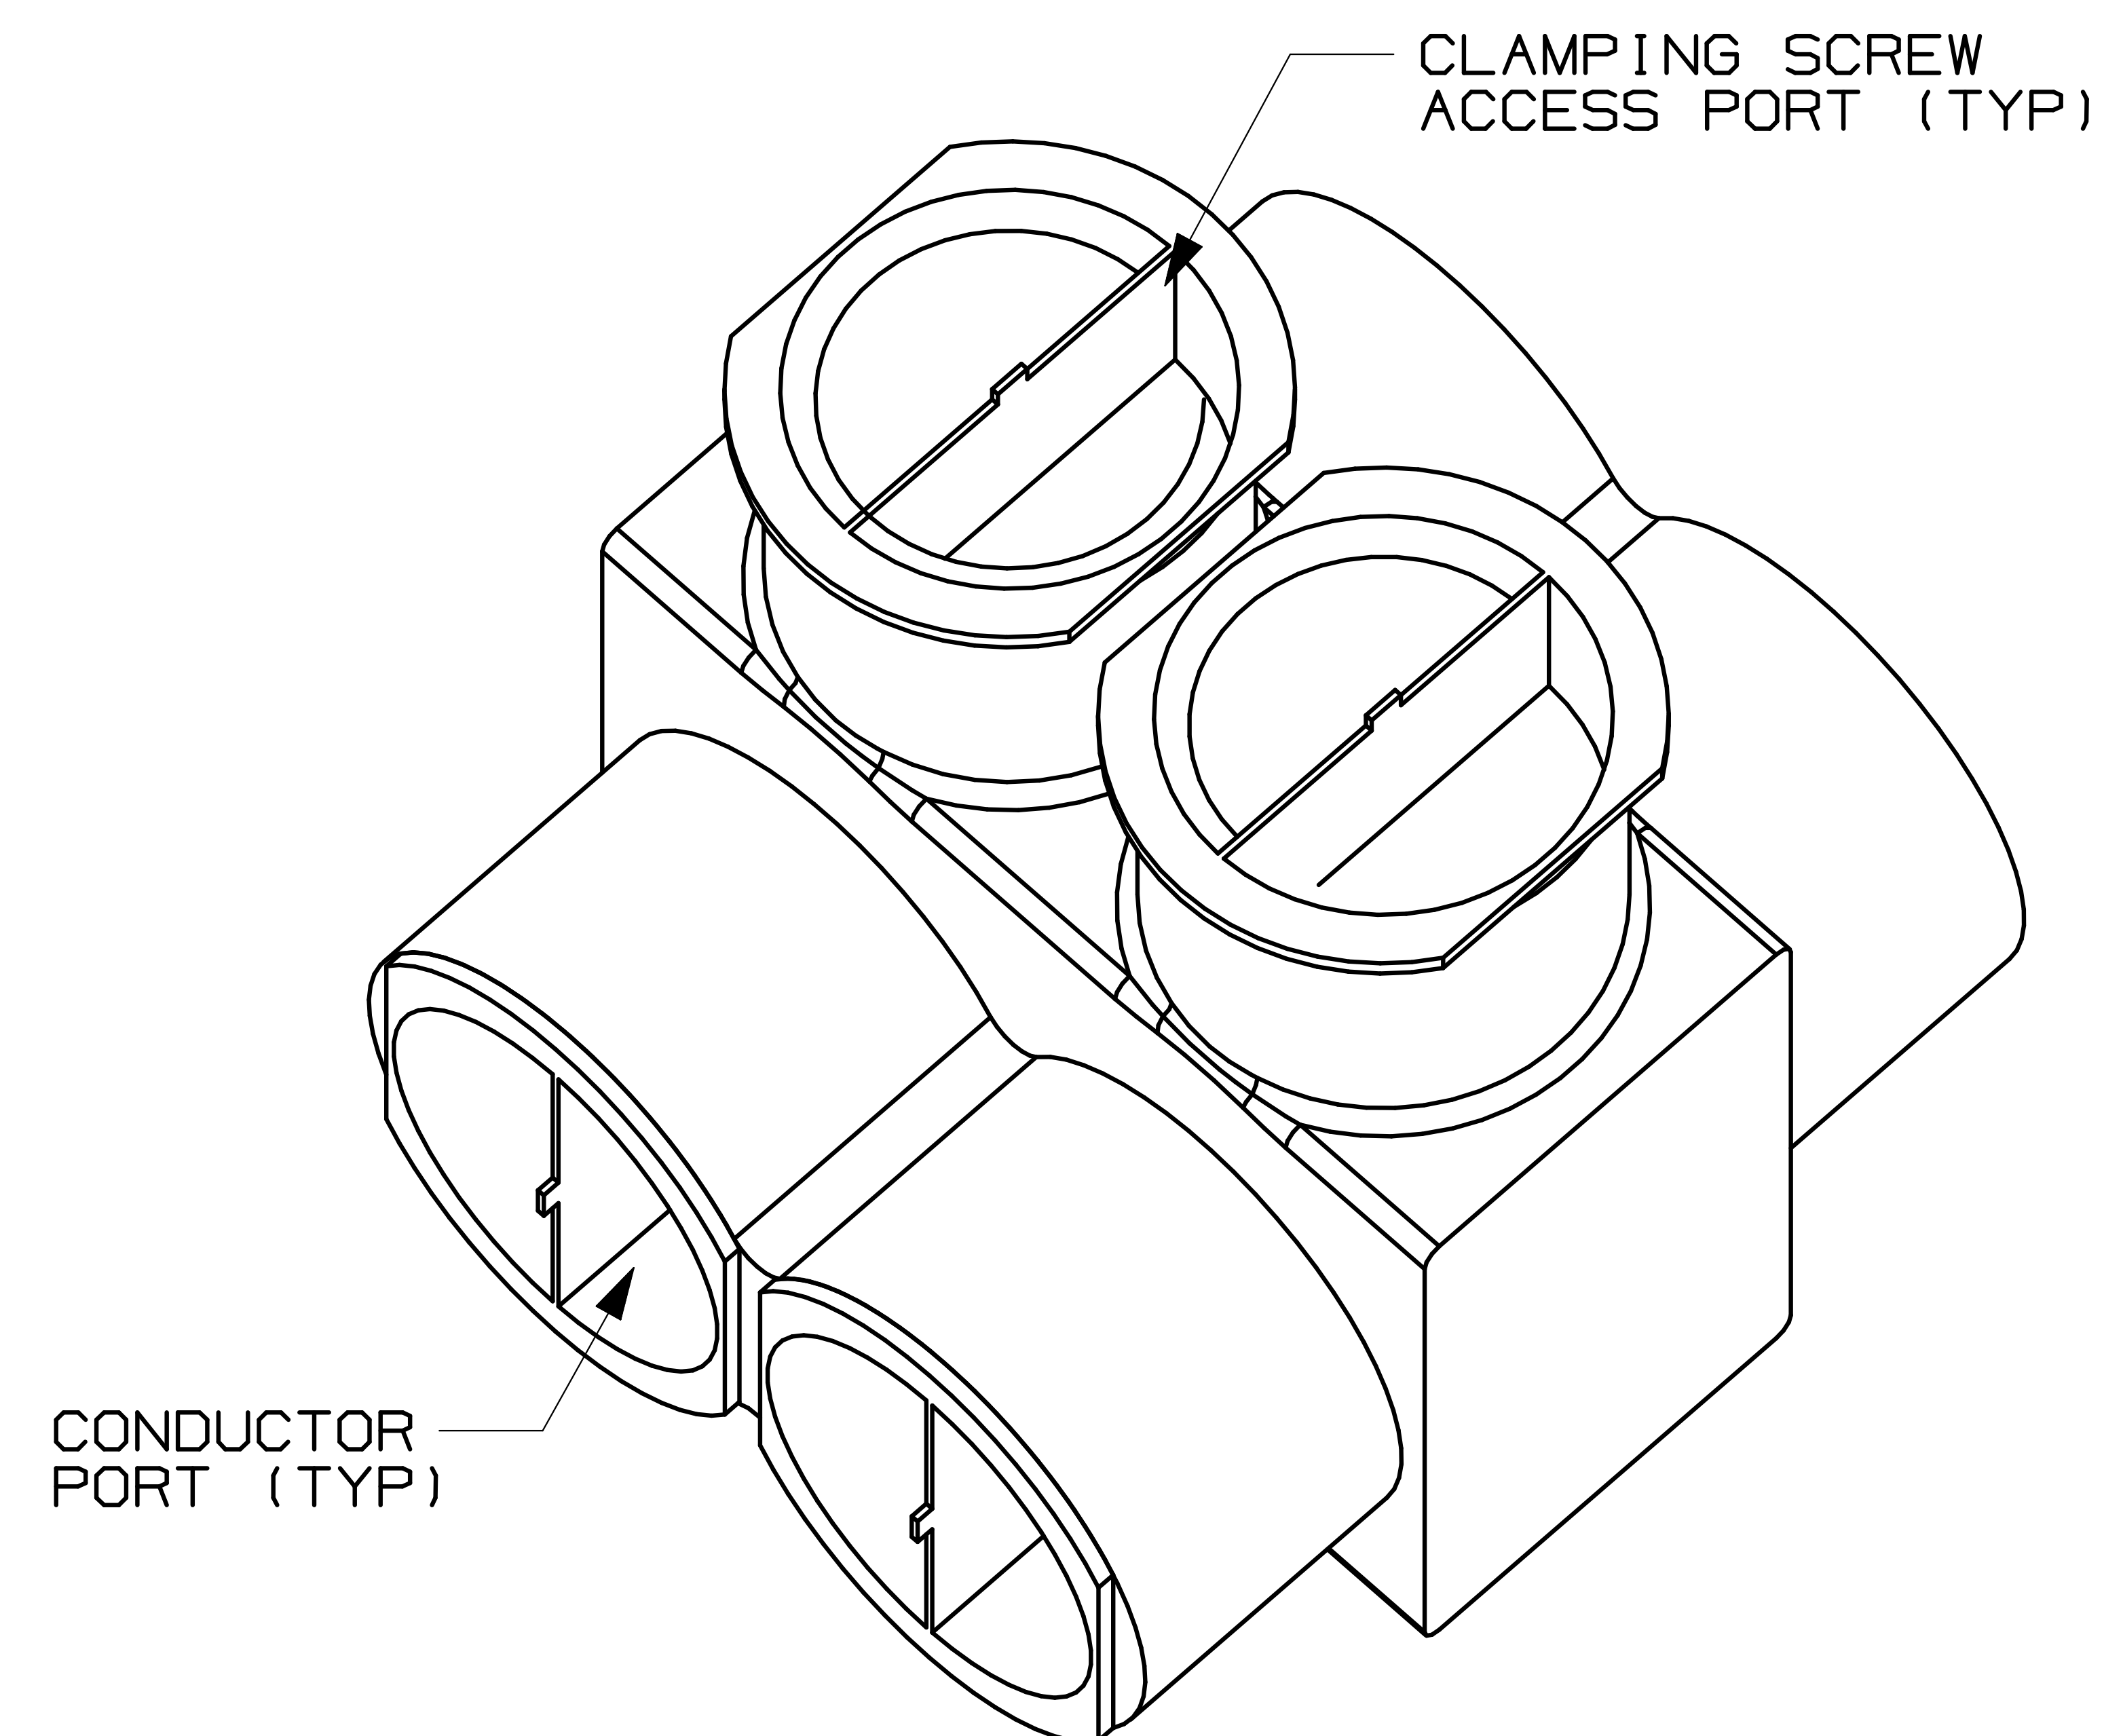
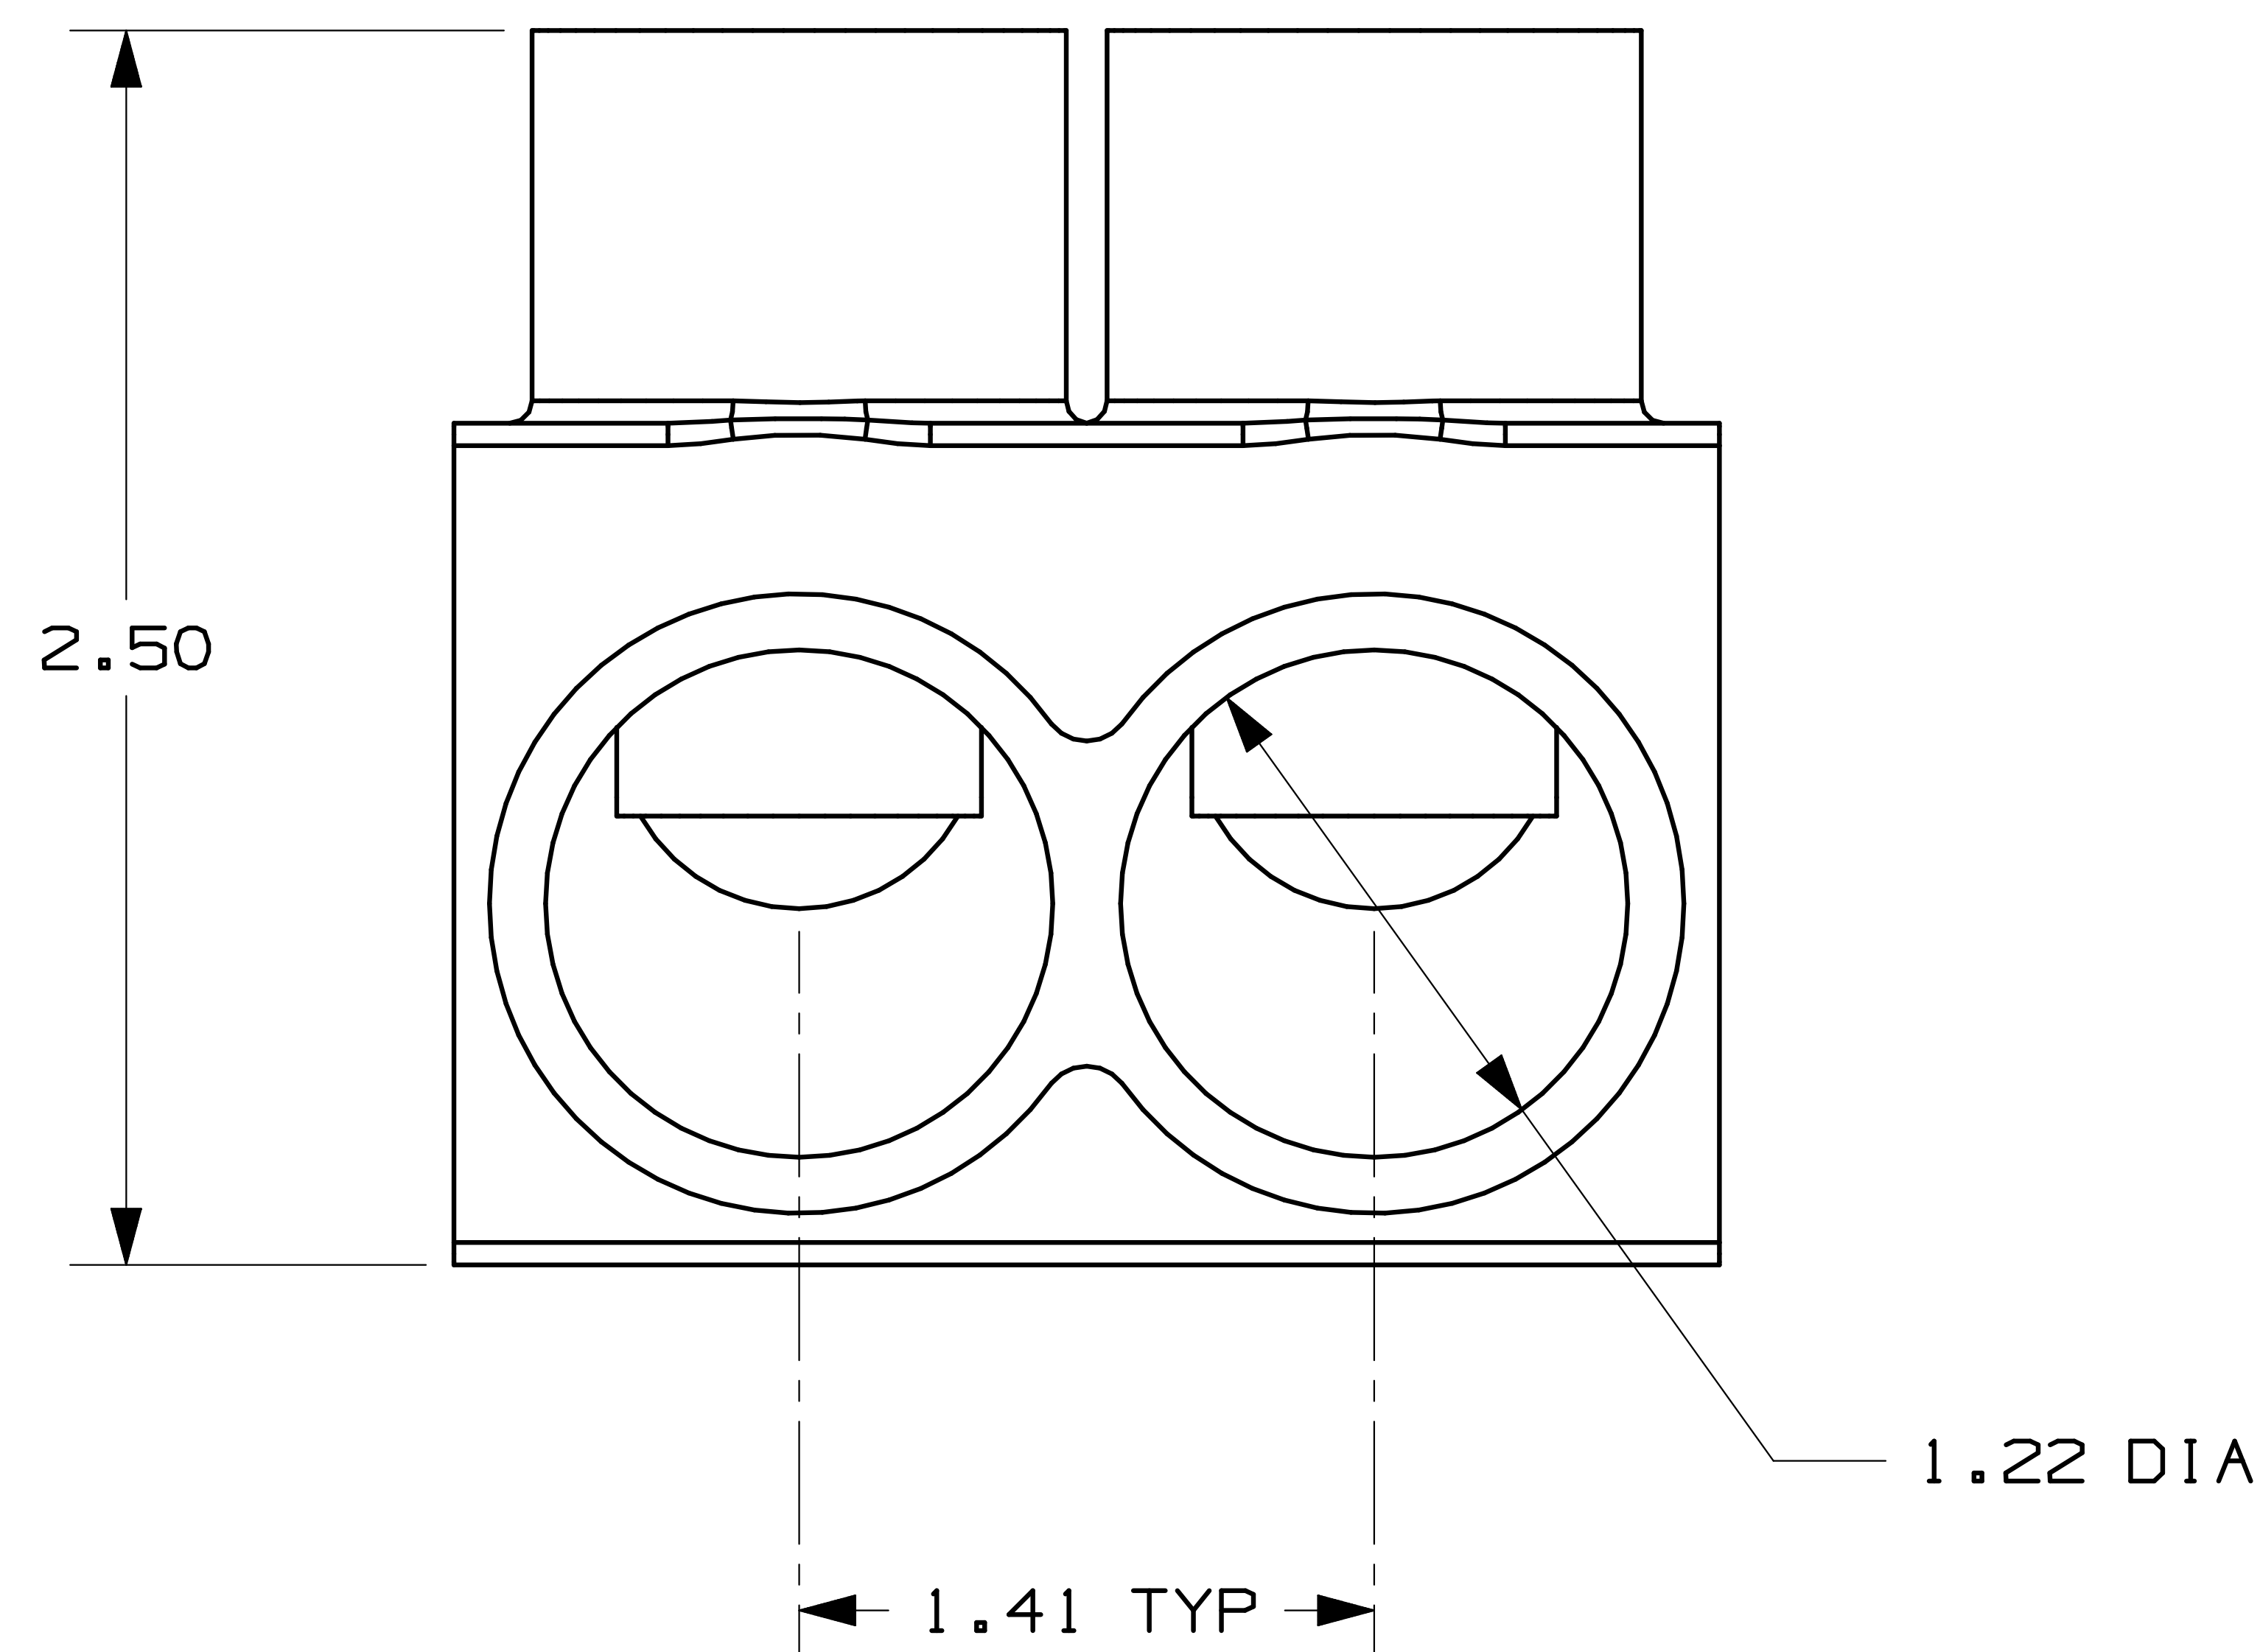


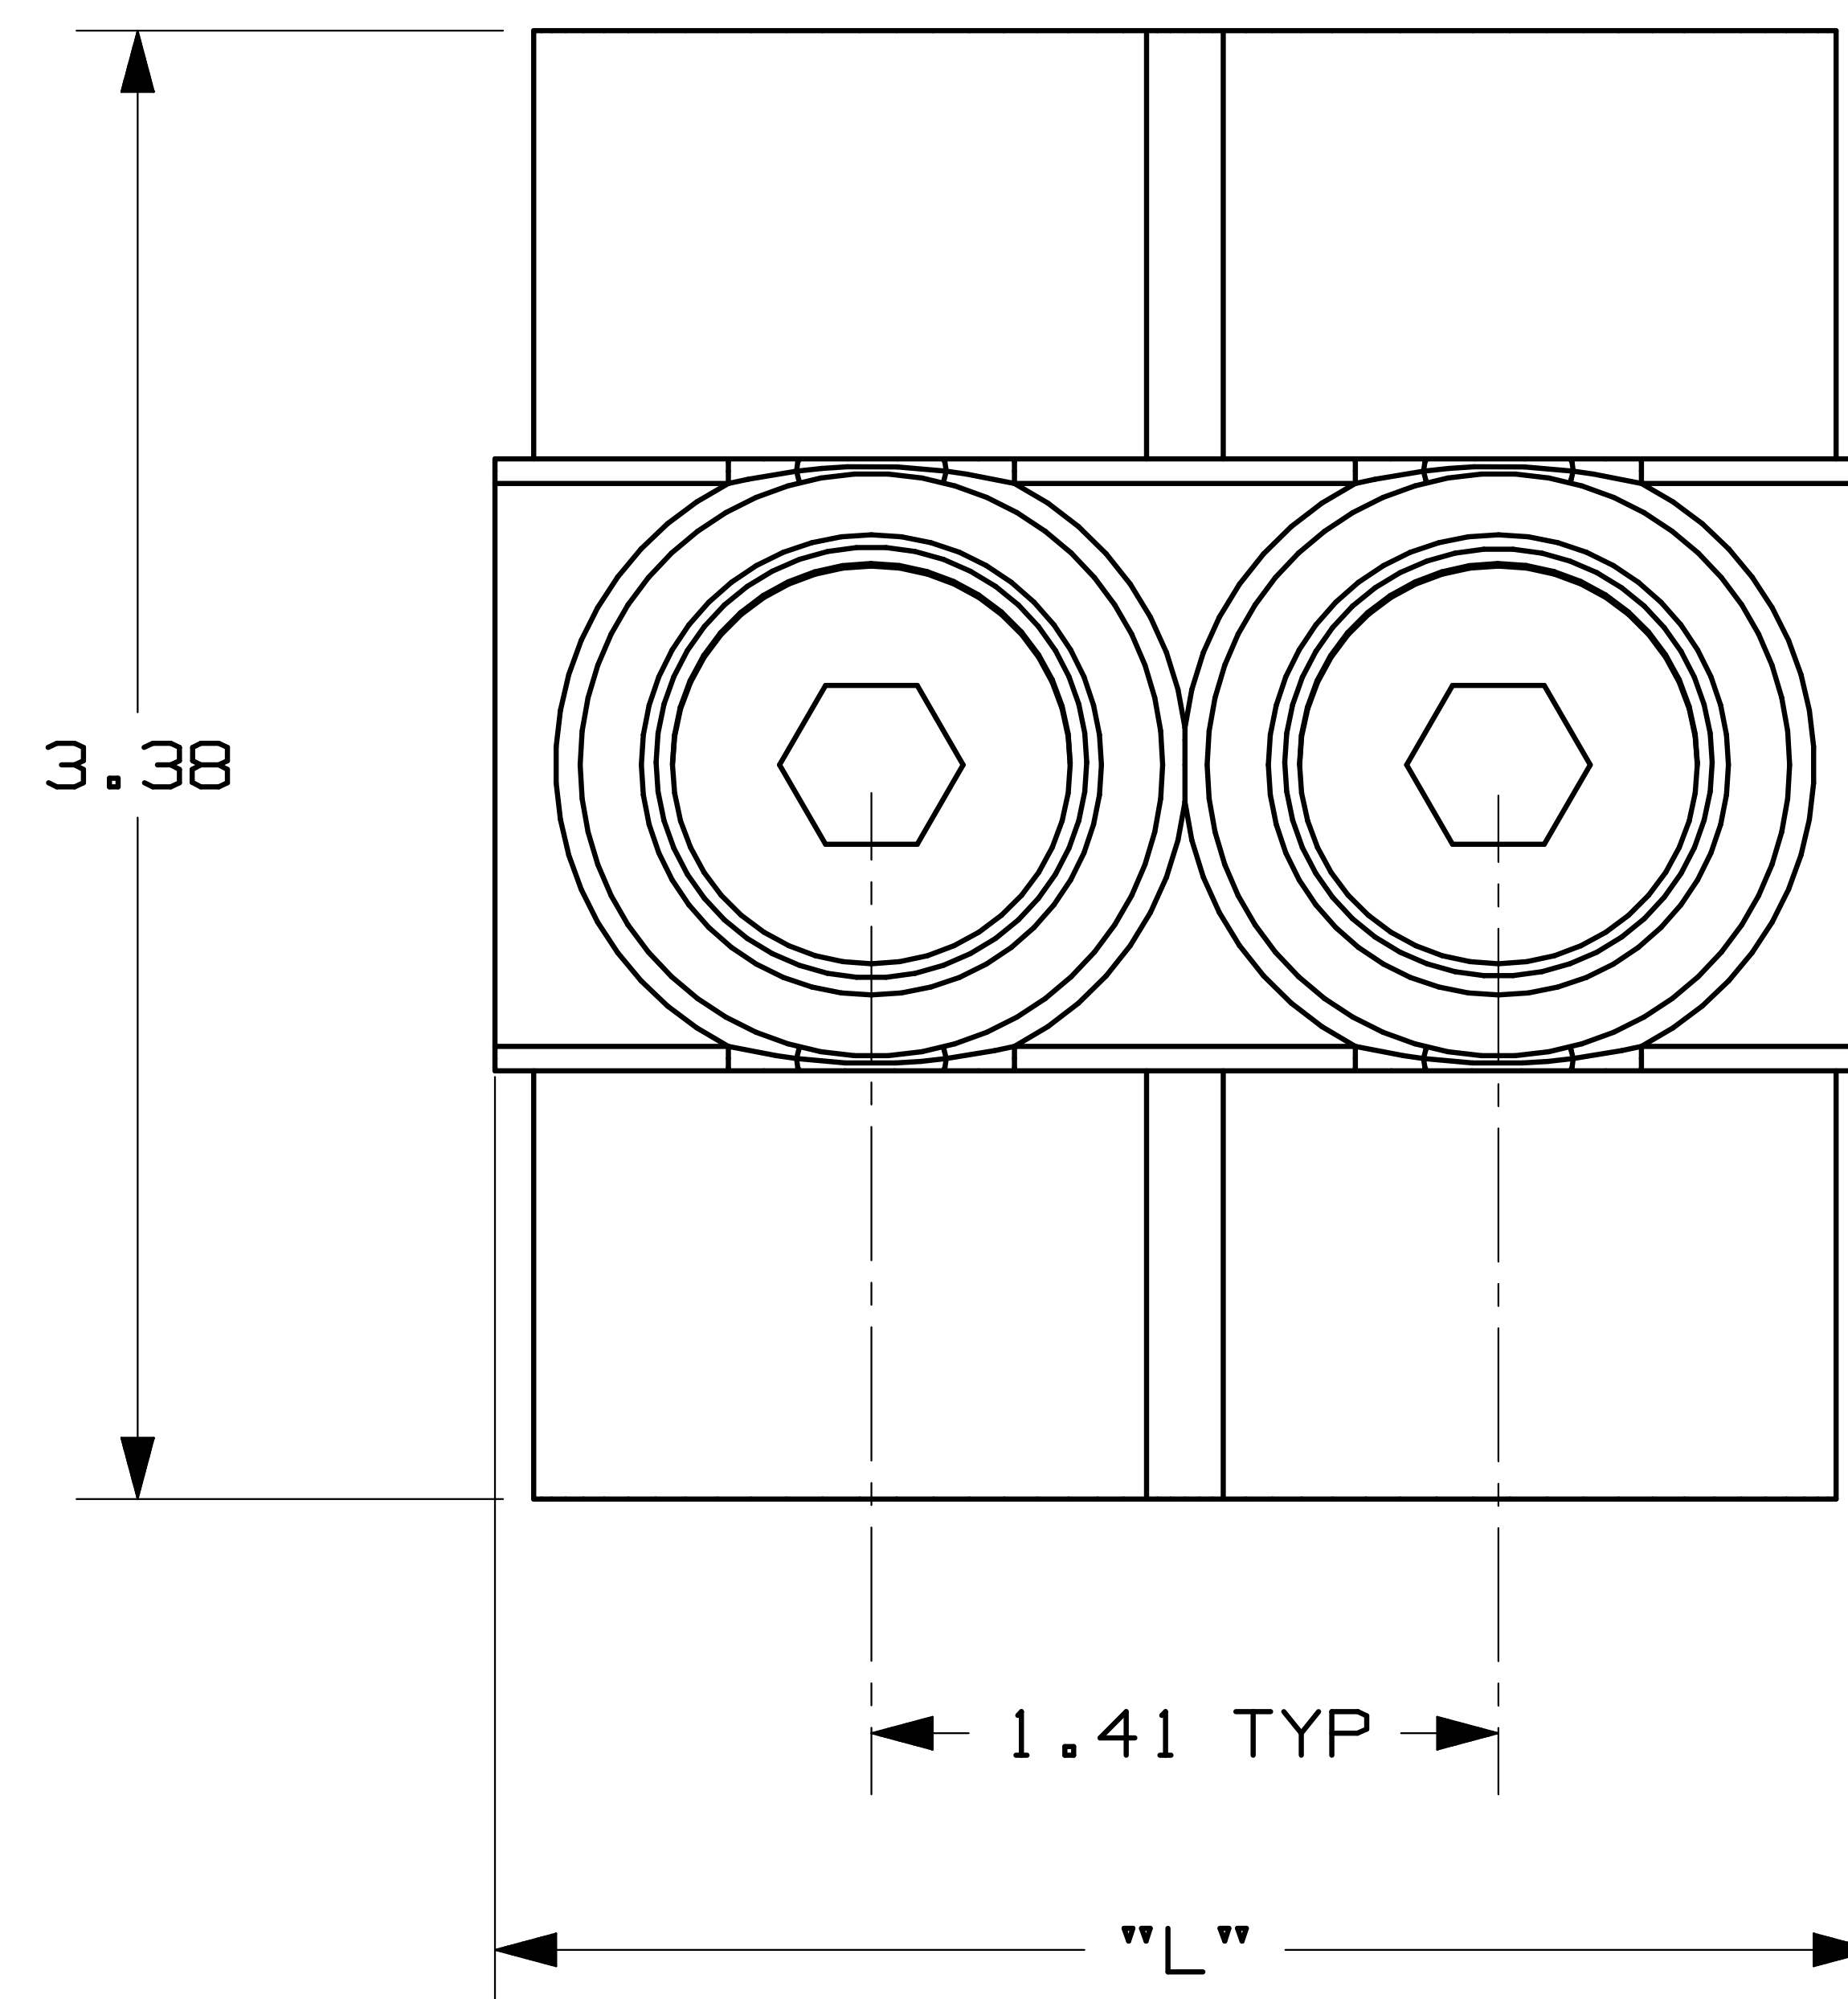

- NOTES :

1. DUAL RATED FOR ALUMINUM OR COPPER CONDUCTORS.
2. WIRE RANGE: 750 kcmil - 1/0 AWG.
ONLY ONE CONDUCTOR PER PORT ALLOWED.
3. STRIP LENGTH: 1.50 +.06/-0
4. HEX KEY SIZE: 3/8", TIGHTENING TORQUE 375 IN-LB.
5. VOLTAGE RATING: 600 V. MAX.
6. TEMPERATURE RATING: 90° C.
7. CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
8. INSULATION MATERIAL IS CLEAR PVC.
9. CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
10. ALL DIMENSIONS SHOWN ARE NOMINAL.
11. PACKAGE QTY: -2Y = 2 PCS
 -1Y = 1 PC
12. THIS PART IS ROHS COMPLIANT.

PART NUMBER	# CONDUCTOR PORTS	DIM "L"
PCSB750-2-2Y	2	3.00
PCSB750-3-2Y	3	4.44
PCSB750-4-2Y	4	5.81
PCSB750-5-1Y	5	7.25
PCSB750-6-1Y	6	8.63
PCSB750-7-1Y	7	10.00
PCSB750-8-1Y	8	11.44
PCSB750-9-1Y	9	12.81
PCSB750-10-1Y	10	14.25

									C41575_01			
									 TINLEY PARK, ILLINOIS			
01	3/06	JHNU	LEM	REVISED ROHS NOTE	PC00334				MULTI-TAP INSULATED CONNECTORS PCSB 750 DOUBLE SIDED SERIES			
00	2/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00299							
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM		DRAWN BY JHNU	CHK'D	SCALE N/A	DRAWING NO. C41575