


**SERIES:** PDME1-S | **DESCRIPTION:** DC-DC CONVERTER**FEATURES**

- 1 W isolated output
- unregulated output
- compact SIP package
- single/dual output models
- continuous short circuit protection
- extended temperature range (-40~105°C)
- 1500 Vdc isolation
- no load input current as low as 5 mA
- EN 62368-1, UL 62368-1
- efficiency up to 85%




MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple & noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PDME1-S3-S3-S <sup>3</sup>	3.3	2.97~3.63	3.3	30	303	1	100	79
PDME1-S3-S5-S <sup>3</sup>	3.3	2.97~3.63	5	20	200	1	100	82
PDME1-S3-S9-S <sup>3</sup>	3.3	2.97~3.63	9	11	111	1	100	85
PDME1-S3-S12-S <sup>3</sup>	3.3	2.97~3.63	12	8	83	1	100	82
PDME1-S3-S15-S <sup>3</sup>	3.3	2.97~3.63	15	7	67	1	100	82
PDME1-S3-S24-S <sup>3</sup>	3.3	2.97~3.63	24	4	42	1	100	84
PDME1-S3-D3-S <sup>3</sup>	3.3	2.97~3.63	±3.3	±15	±152	1	100	78
PDME1-S3-D5-S <sup>3</sup>	3.3	2.97~3.63	±5	±10	±100	1	100	82
PDME1-S3-D9-S <sup>3</sup>	3.3	2.97~3.63	±9	±6	±56	1	100	85
PDME1-S3-D12-S <sup>3</sup>	3.3	2.97~3.63	±12	±5	±42	1	100	82
PDME1-S3-D15-S <sup>3</sup>	3.3	2.97~3.63	±15	±4	±34	1	100	82
PDME1-S3-D24-S <sup>3</sup>	3.3	2.97~3.63	±24	±2	±21	1	100	84
PDME1-S5-S3-S	5	4.5~5.5	3.3	30	303	1	75	74
PDME1-S5-S5-S	5	4.5~5.5	5	20	200	1	75	82
PDME1-S5-S9-S	5	4.5~5.5	9	12	111	1	75	83
PDME1-S5-S12-S	5	4.5~5.5	12	9	84	1	75	83
PDME1-S5-S15-S	5	4.5~5.5	15	7	67	1	75	83
PDME1-S5-S24-S	5	4.5~5.5	24	4	42	1	100	85
PDME1-S5-D3-S <sup>3,4</sup>	5	4.5~5.5	±3.3	±15	±152	1	75	74
PDME1-S5-D5-S	5	4.5~5.5	±5	±10	±100	1	75	82
PDME1-S5-D9-S	5	4.5~5.5	±9	±6	±56	1	75	83
PDME1-S5-D12-S	5	4.5~5.5	±12	±5	±42	1	75	83
PDME1-S5-D15-S	5	4.5~5.5	±15	±4	±34	1	75	83
PDME1-S5-D24-S	5	4.5~5.5	±24	±3	±21	1	100	85
PDME1-S12-S3-S	12	10.8~13.2	3.3	30	303	1	75	75
PDME1-S12-S5-S	12	10.8~13.2	5	20	200	1	75	80
PDME1-S12-S9-S	12	10.8~13.2	9	12	111	1	75	80

**MODEL  
(CONTINUED)**

MODEL (CONTINUED)	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple & noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PDME1-S12-S12-S	12	10.8~13.2	12	9	83	1	75	80
PDME1-S12-S15-S	12	10.8~13.2	15	7	67	1	75	81
PDME1-S12-S24-S	12	10.8~13.2	24	4	42	1	100	81
PDME1-S12-D3-S	12	10.8~13.2	±3.3	±15	±152	1	75	75
PDME1-S12-D5-S	12	10.8~13.2	±5	±10	±100	1	75	80
PDME1-S12-D12-S	12	10.8~13.2	±12	±5	±42	1	75	81
PDME1-S12-D15-S	12	10.8~13.2	±15	±4	±34	1	75	81
PDME1-S12-D24-S	12	10.8~13.2	±24	±3	±21	1	100	80
PDME1-S15-S5-S	15	13.5~16.5	5	20	200	1	75	80
PDME1-S15-S9-S	15	13.5~16.5	9	12	111	1	75	80
PDME1-S15-S12-S	15	13.5~16.5	12	9	83	1	75	80
PDME1-S15-S15-S	15	13.5~16.5	15	7	67	1	75	81
PDME1-S15-D5-S	15	13.5~16.5	±5	±10	±100	1	75	80
PDME1-S15-D12-S	15	13.5~16.5	±12	±5	±42	1	75	80
PDME1-S15-D15-S	15	13.5~16.5	±15	±4	±34	1	75	81
PDME1-S24-S3-S	24	21.6~26.4	3.3	30	303	1	75	75
PDME1-S24-S5-S	24	21.6~26.4	5	20	200	1	75	79
PDME1-S24-S9-S	24	21.6~26.4	9	12	111	1	75	80
PDME1-S24-S12-S	24	21.6~26.4	12	83	9	1	75	81
PDME1-S24-S15-S	24	21.6~26.4	15	7	67	1	75	81
PDME1-S24-S24-S	24	21.6~26.4	24	4	42	1	100	81
PDME1-S24-D5-S	24	21.6~26.4	±5	±10	±100	1	75	80
PDME1-S24-D12-S	24	21.6~26.4	±12	±5	±42	1	75	81
PDME1-S24-D15-S	24	21.6~26.4	±15	±4	±34	1	75	79
PDME1-S24-D24-S	24	21.6~26.4	±24	±3	±21	1	100	80

- Notes:
1. Measured at nominal input, 20 MHz bandwidth oscilloscope, with 10 µF tantalum and 1 µF ceramic capacitors on the output.
  2. Measured at nominal input voltage, full load.
  3. Model is not UL certified.
  4. Model is not CE certified.
  5. All specifications are measured at Ta=25°C, humidity < 75%, nominal input voltage, and rated output load unless otherwise specified.

**PART NUMBER KEY**

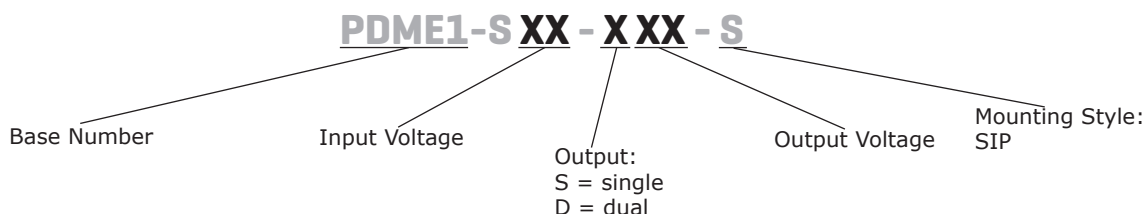

## INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	3.3 Vdc input models	2.97	3.3	3.63	Vdc
	5 Vdc input models	4.5	5	5.5	Vdc
	12 Vdc input models	10.8	12	13.2	Vdc
	15 Vdc input models	13.5	15	16.5	Vdc
	24 Vdc input models	21.6	24	26.4	Vdc
surge voltage	for maximum of 1 second				
	3.3 Vdc input models	-0.7		5	Vdc
	5 Vdc input models	-0.7		9	Vdc
	12 Vdc input models	-0.7		18	Vdc
	15 Vdc input models	-0.7		21	Vdc
	24 Vdc input models	-0.7		30	Vdc
current	at full load			405	mA
	3.3 Vdc input models			389	mA
	at full load			286	mA
	5 Vdc input models			254	mA
				254	mA
current	at full load			110	mA
	12 Vdc input models				
	at full load			88	mA
	15 Vdc input models				
current	at full load			61	mA
	24 Vdc input models				
filter	filter capacitor				

## OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load <sup>5</sup>	3.3, 5 Vdc output models			2,400	μF
	9 Vdc output models			1,000	μF
	12, 15 Vdc output models			560	μF
	24, ±12, ±15 Vdc output models			220	μF
	±3.3, ±5 Vdc output models			1,200	μF
	±9 Vdc output models			470	μF
	all other output models			100	μF
voltage accuracy	see tolerance envelope curves				
line regulation	for Vin change of 1%				
	3.3 Vdc output models			±1.5	%
	all other models			±1.2	%
load regulation	from 10% to full load			18	%
	3.3 input models			15	%
	from 10% to full load			±20	%
	all other input models			±15	%
				±10	%
switching frequency	100% load, nominal input voltage				
	3.3 Vdc input models		220		kHz
	all other input models		270		kHz
temperature coefficient	at full load		±0.02		%/°C

Note: 5. Tested at input voltage range and full load.

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, self recovery				

## SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA	1,500			Vdc
isolation resistance	input to output at 500 Vdc	1,000			MΩ
isolation capacitance	input to output, 100 kHz / 0.1 V		20		pF
safety approvals <sup>6</sup>	certified to 62368-1: EN, UL				
conducted emissions	CISPR32/EN55032, class B (external circuit required, see Figure 3)				
radiated emissions	CISPR32/EN55032, class B (external circuit required, see Figure 3)				
ESD	IEC/EN61000-4-2, air ± 8 kV; contact ± 4 kV, class B				
MTBF	as per MIL-HDBK-217F, 25°C	3,500,000			hours
RoHS	yes				


Note: 6. Model PDME1-S5-D3-S does not have UL or CE certification.

## ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%
case temperature rise	3.3 Vdc output model at 25°C all other models at 25°C		25 15		°C °C

## DERATING CURVES

**TEMPERATURE DERATING CURVE**  
*5 Vdc input models*

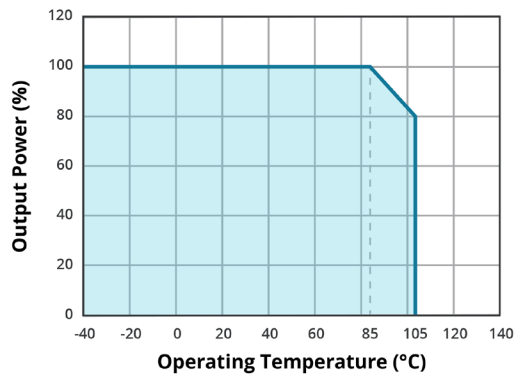


**TEMPERATURE DERATING CURVE**  
*all other input models*

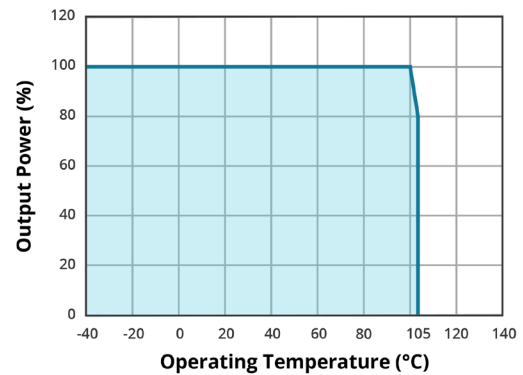

## DERATING CURVES (CONTINUED)


### OUTPUT REGULATION CURVE

3.3, 5, 12, 15 & 24 Vdc input models / 3.3 Vdc output model  
(nominal input)

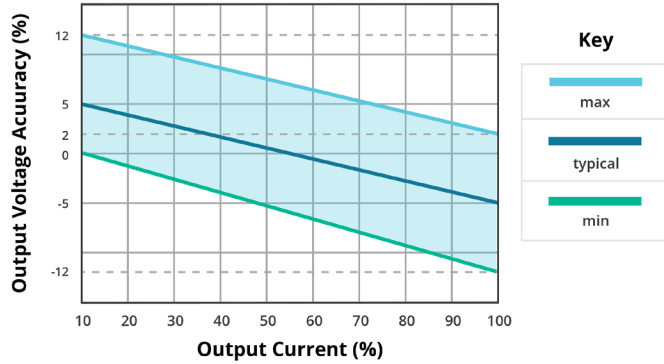


### OUTPUT REGULATION CURVE

3.3 & 5 Vdc input / all other output models  
(nominal input)

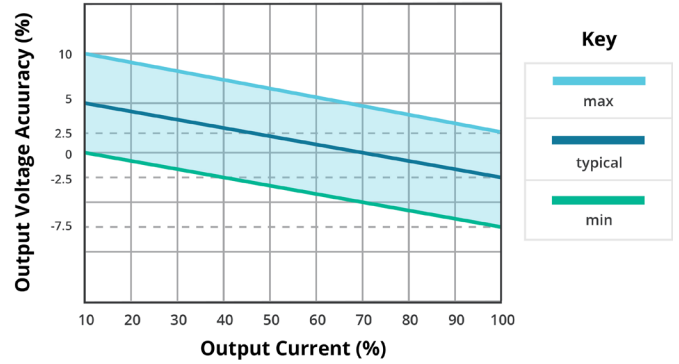

### OUTPUT REGULATION CURVE


12, 15 & 24 Vdc input models / all other output models  
(nominal input)

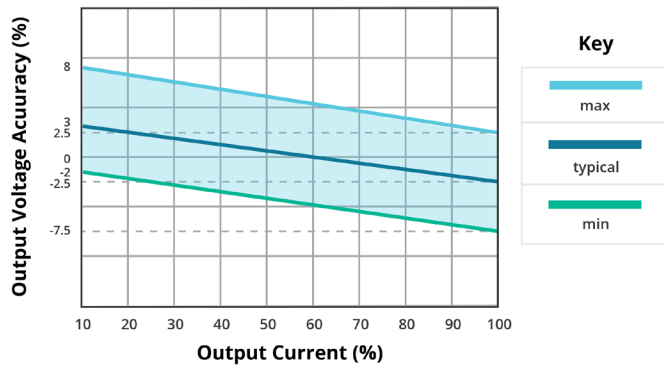

## SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	1.5 mm from case for 10 seconds			300	°C
wave soldering	see wave soldering profile			260	°C

### WAVE SOLDERING PROFILE

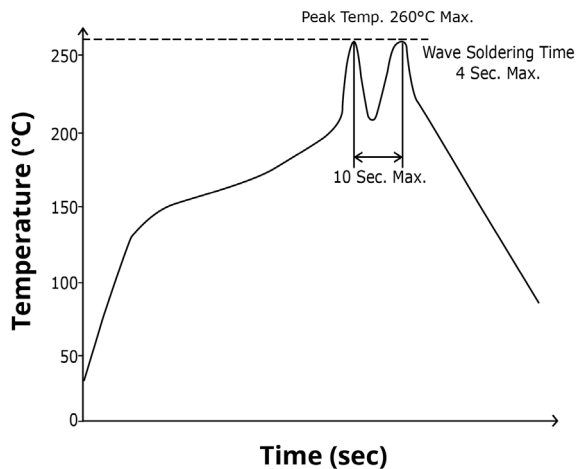




## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	19.65 x 6.00 x 10.16 [0.774 x 0.236 x 0.400 inch]				mm
case material	black flame-retardant and heat-resistant plastic (UL94V-0)				
weight			2.1		g

## MECHANICAL DRAWING

units: mm [inch]  
tolerance:  $\pm 0.25[\pm 0.010]$   
pin section tolerance:  $\pm 0.10[\pm 0.004]$

PIN CONNECTIONS		
PIN	Function	
	Single	Dual
1	Vin	Vin
2	GND	GND
4	0V	-Vout
5	No Pin	0V
6	+Vout	+Vout

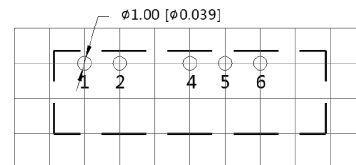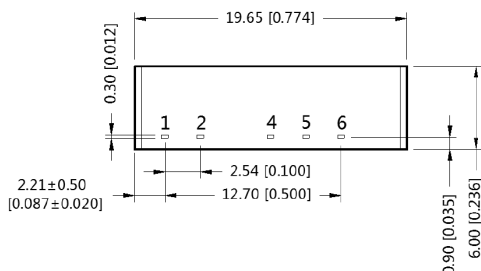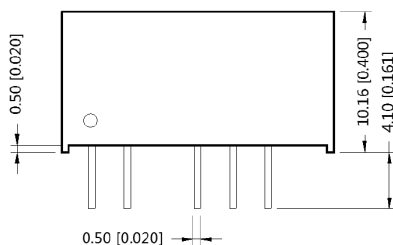


Note : Grid 2.54\*2.54mm  
Recommended PCB Layout  
Top View

## APPLICATION CIRCUIT

If you want to further reduce the input and output ripple, a filter capacitor may be connected to the input and output terminals (Figures 1 & 2) provided that the capacitance is less than the maximum capacitive load of the model, otherwise start-up problems may be caused if the capacitance is too large.


**Figure 1**  
Single Output Models

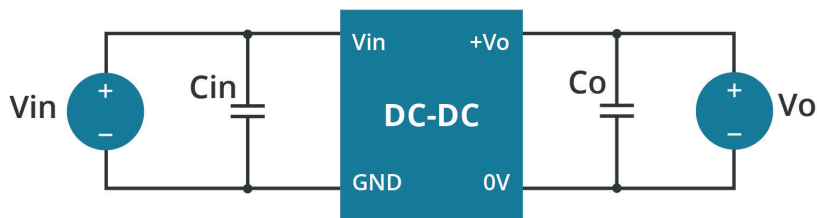

**Table 1**

Vin (Vdc)	Cin (μF / V)	Vo (Vdc)	Cout (μF)
3.3	10 μF / 16 V	3.3, 5	10 μF / 16 V
--	--	9, 12	2.2 μF / 25 V
--	--	15, 24	1 μF / 50 V
5	4.7 μF	3.3, 5	10 μF
		9, 12	2.2 μF
		15, 24	1 μF
12	2.2 μF / 25 V	3.3	10 μF / 16 V
15	2.2 μF / 25 V	5	10 μF / 16 V
24	1 μF / 50 V	9	2.2 μF / 16 V
--	--	12	2.2 μF / 25 V
--	--	15	1 μF / 25 V
--	--	24	1 μF / 50 V

**Figure 2**  
Dual Output Models

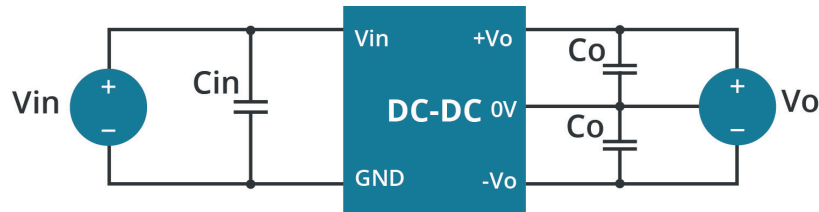


**Table 2**


Vin (Vdc)	Cin (μF)	Vo (Vdc)	Cout (μF)
3.3	10 μF / 16 V	±3.3, ±5	10 μF / 16 V
--	--	±9, ±12	2.2 μF / 25 V
--	--	±15, ±24	1 μF / 50 V
5	4.7	±3.3, ±5	4.7 μF
		±9, ±12	1 μF
		±15, ±24	0.47 μF
12	2.2 μF / 25 V	±3.3	4.7 μF / 16 V
15	2.2 μF / 25 V	±5	4.7 μF / 16 V
24	1 μF / 50 V	±12	1 μF / 25 V
--	--	±15	0.47 μF / 25 V
--	--	±24	0.47 μF / 50 V

## EMC RECOMMENDED CIRCUIT

**Figure 3**  
Single Output Models

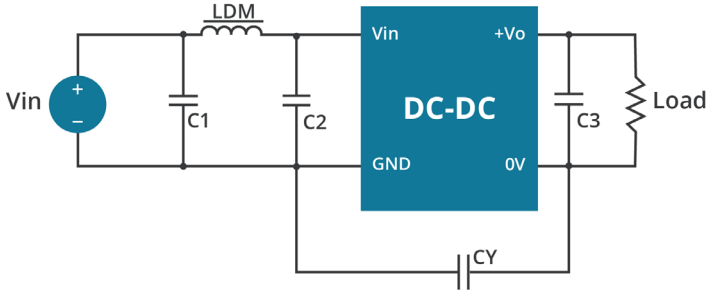

**Figure 4**  
Dual Output Models

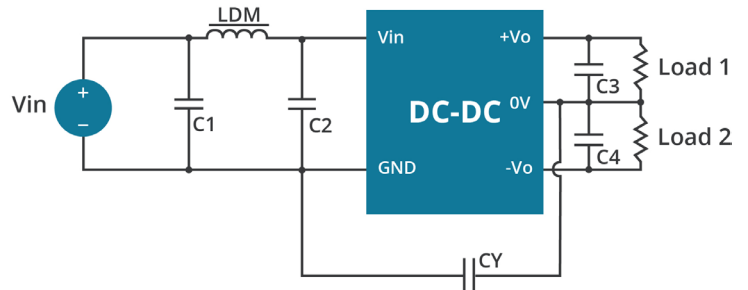

**Table 3**

Recommended External Circuit Components			
Vin (Vdc)	Vo (Vdc)	3.3, 5	9, 12, 15, 24
3.3	C1, C2	4.7 $\mu$ F / 25 V	4.7 $\mu$ F / 25 V
	CY	--	270 pF / 2 kVdc
	C3	refer to Cout in Tables 1, 2	
	LDM	6.8 $\mu$ H	6.8 $\mu$ H
5	C1, C2	4.7 $\mu$ F / 25 V	4.7 $\mu$ F / 25 V
	CY	--	1 nF / 4 kVdc
	C3	refer to Cout in Tables 1, 2	
	LDM	6.8 $\mu$ H	6.8 $\mu$ H
12, 15, 24	C1, C2	4.7 $\mu$ F / 50 V	4.7 $\mu$ F / 50 V
	CY	270 pF / 2 kVdc	270 pF / 2 kVdc
	C3, C4	refer to Cout in Tables 1, 2	
	LDM	6.8 $\mu$ H	6.8 $\mu$ H



## REVISION HISTORY

rev.	description	date
1.0	initial release	05/10/2019
1.01	safeties updated in features and safety line	01/12/2021
1.02	model table updated, packaging removed	03/08/2021
1.03	3.3 Vdc input model added, derating curves and circuit figures updated	05/26/2022

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**

a bel group

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.