

## Fuse plug - P-FU 5X20 LED 24-5 - 3209248

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fuse plug, Nominal current: 6.3 A, Width: 5.2 mm, Fuse type: G / 5 x 20, Fuse type: Glass / ceramics / ..., Mounting type: Plug-in mounting, Color: black

### Why buy this product

- Large-surface labeling option
- Test contacts on both sides of the fuse
- Versions with bipolar defect indicator
- Can be used for overload/short-circuit protection

### Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 548342

### Technical data

#### General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Number of levels	1
Color	black
Insulating material	PA
Flammability rating according to UL 94	V0

#### Dimensions

Width	5.2 mm
Length	23.5 mm

#### General

Fuse	G / 5 x 20
Fuse type	Glass / ceramics / ...
Degree of pollution	3
Maximum power dissipation	1.6 W (Short-circuit and overload protection)
LED voltage range	12 V DC ... 30 V DC
LED current range	0.35 mA ... 0.95 mA

# Fuse plug - P-FU 5X20 LED 24-5 - 3209248

## Technical data

### General

Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal current $I_N$	6.3 A (the current is determined by the fuse used)
Open side panel	No

### Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	27142001
eCl@ss 4.1	27142001
eCl@ss 5.0	27142001
eCl@ss 5.1	27142001
eCl@ss 6.0	27141149
eCl@ss 7.0	27141149
eCl@ss 8.0	27142001

### ETIM

ETIM 4.0	EC002018
ETIM 5.0	EC000036

### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / CSA / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

# Fuse plug - P-FU 5X20 LED 24-5 - 3209248

## Approvals

### Approval details

UL Recognized	
Nominal current IN	10 A
Nominal voltage UN	24 V

cUL Recognized	
Nominal current IN	10 A
Nominal voltage UN	24 V

CSA	
Nominal current IN	10 A
Nominal voltage UN	24 V


EAC
-----

cULus Recognized
------------------


## Drawings

# Fuse plug - P-FU 5X20 LED 24-5 - 3209248

Application drawing

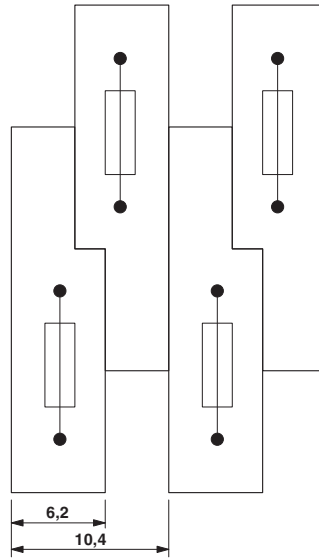


Application drawing

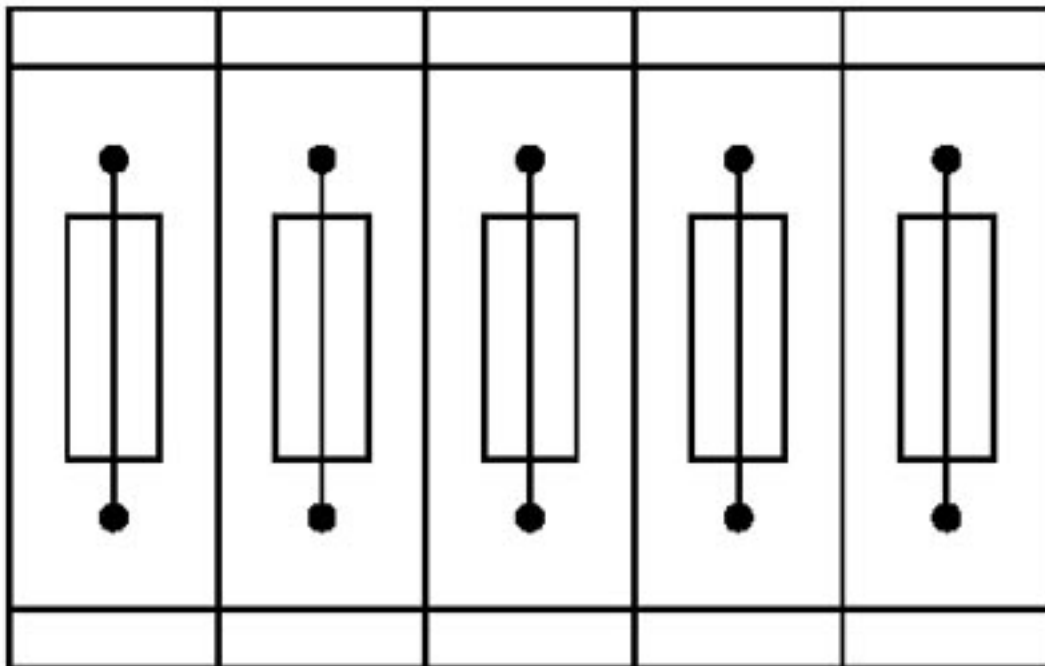

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks

## Fuse plug - P-FU 5X20 LED 24-5 - 3209248

Application drawing

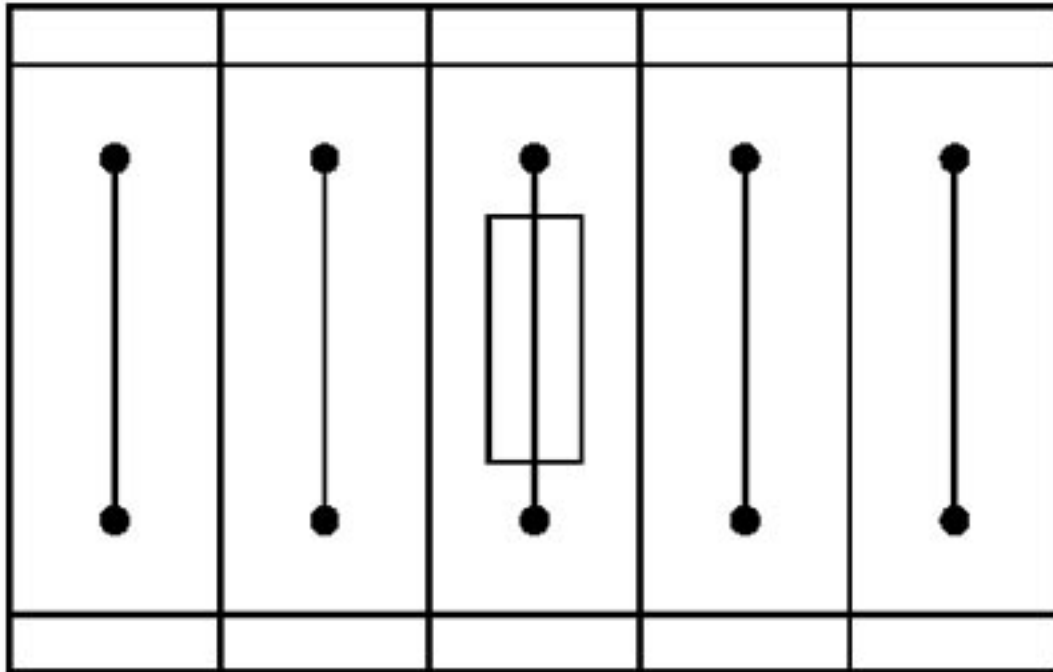

Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>