

## Fuse plug - P-FU 6,3X32 LA 250 - 3046524

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fuse plug, Connection method: Plug connection, Nominal current: 10 A, Width: 8.2 mm, Fuse type: G / 6,3 x 32, Fuse type: Glass / ceramics / ..., Mounting type: Plug-in mounting, Color: black

### Why buy this product

- Large-surface labeling option
- Versions with bipolar defect indicator
- Test contacts on both sides of the fuse
- Can be used for overload/short-circuit protection

### Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 113113

### Technical data

#### General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Number of levels	1
Color	black
Insulating material	PA
Flammability rating according to UL 94	V0

#### Dimensions

Width	8.2 mm
Length	40 mm

#### General

Fuse	G / 6,3 x 32
Fuse type	Glass / ceramics / ...
Degree of pollution	3
Maximum power dissipation	1.6 W (Short-circuit and overload protection)
LED voltage range	110 V AC/DC ... 250 V AC/DC
LED current range	0.41 mA ... 0.96 mA

# Fuse plug - P-FU 6,3X32 LA 250 - 3046524

## Technical data

### General

Maximum load current	10 A (the current is determined by the fuse used)
Nominal current I <sub>N</sub>	10 A (the current is determined by the fuse used)
Open side panel	No

### Connection data

Connection method	Plug connection
-------------------	-----------------

### Ambient conditions

Ambient temperature (operation)	125 °C
---------------------------------	--------

### Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	27141199
eCl@ss 4.1	27141199
eCl@ss 5.0	27141145
eCl@ss 5.1	27141145
eCl@ss 6.0	27141151
eCl@ss 7.0	27141151
eCl@ss 8.0	27142001

### ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000899
ETIM 5.0	EC000036

### UNSPSC

UNSPSC 6.01	30211812
UNSPSC 7.0901	39121410
UNSPSC 11	39121411
UNSPSC 12.01	39121411
UNSPSC 13.2	39121411

## Approvals

### Approvals

## Fuse plug - P-FU 6,3X32 LA 250 - 3046524

### Approvals

Approvals

CSA / EAC

---


Ex Approvals

---

Approvals submitted

---

### Approval details


CSA 	
Nominal current I <sub>N</sub>	10 A
Nominal voltage U <sub>N</sub>	250 V

EAC
-----

### Drawings


# Fuse plug - P-FU 6,3X32 LA 250 - 3046524

Application drawing

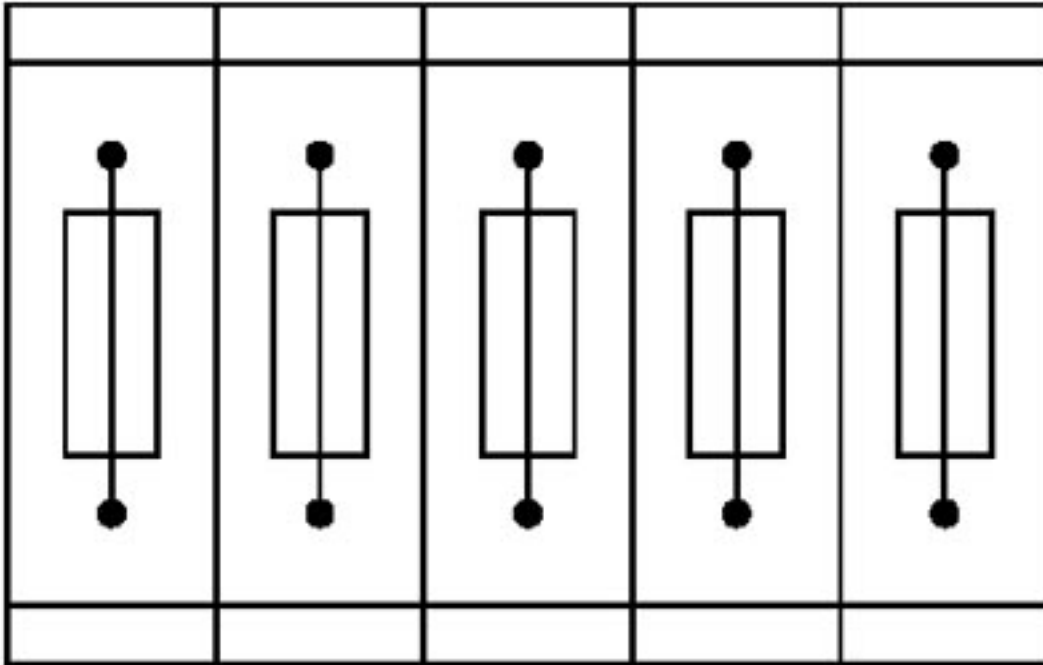

Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks

Application drawing

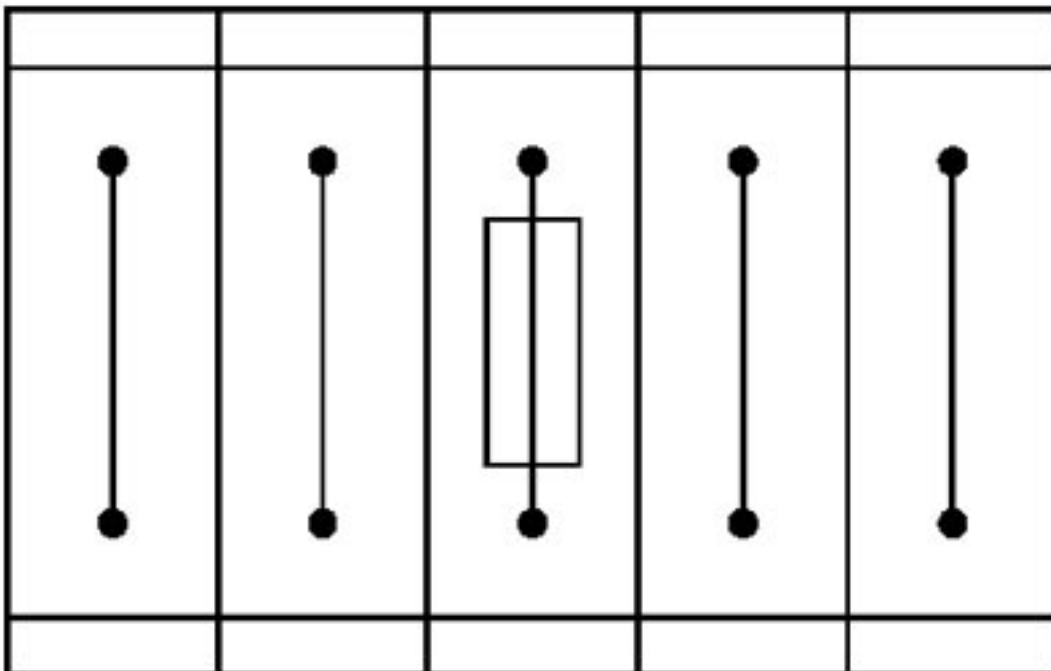

Fuse terminal block in single arrangement,

## Fuse plug - P-FU 6,3X32 LA 250 - 3046524

block consisting of one fuse terminal block and 4 feed-through terminal blocks

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>