



CAT 6A FLAT {32AWG(7/0.08BARE COPPER)WITH特多龙丝/150D*1P+D(7/01TIN COPPER)+A}*4C

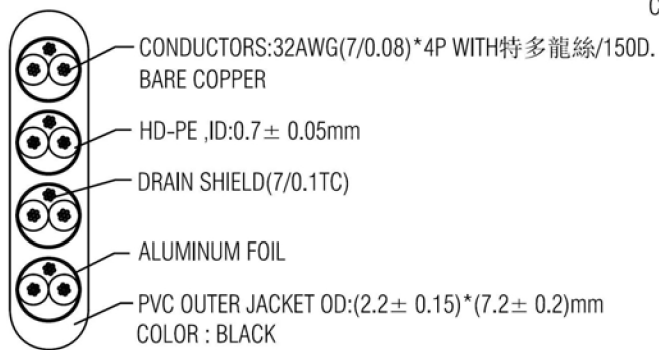

CORD SPECIFICATION

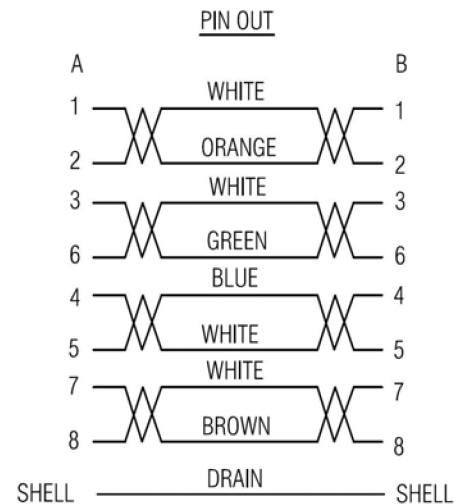

NOTES:

- 1.ELECTRICAL TEST: 100% OPEN,SHORT & MISS WIRE TEST.
- 2.CONDUCTOR RESISTANCE: 5 OHMS MAX. INSULATOR RESISTANCE:5M OHMS MIN.
- 3.HI-POT:DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).
- 5.PRINTING WORD OF CABL:"FLAT CAT 6A CABLE RoSH "

NO.	SPECIFICATION STANDARD	QTY
①	RJ45 CONNECTOR(SHORT TYPE) WITH METAL SHELL,SHELL PLATED GOLD,PIN GOLD PLATED 3u".	2
②	50 PVC MOLDING HOUSING,COLOR:BLACK.	1
③	45P PVC BOOT ,COLOR:BLACK	2
④	CAT 6A FLAT {32AWG(7/0.08BARE COPPER)WITH特多龙丝*1P+D(7/01TIN COPPER)+A}*4C,COLOR:BLACK.	1

DESCRIPTION:		ASSEMBLY FOR CAT 6A FLAT CABLE		NO.	
ITEM NO.		DRAW NO.		PAGE:	1 OF 1
DRAWN BY:		UNIT:	mm	SCALE:	NONE
CHECKED BY:		DATE:		TOLER:	± 0.20
APPVL BY:				REV:	1.1

REV	DESCRIPTION	DATE
1.0	DRAWING ISSUE	