

## Plug - PTSM 0,5/ 4-PL-2,5 WH - 1709460


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Plug component, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Connection method: Push-in spring connection, Color: white, Contact surface: Tin

### Why buy this product

- White design: Stable color when welding and during use
- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- High current carrying capacity of 6 A in very compact dimensions
- Intuitive locking mechanism prevents accidental disconnection



### Key Commercial Data

Packing unit	250 pc
Minimum order quantity	250 pc
GTIN	 4 055626 130507
Weight per Piece (excluding packing)	1.2 g
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

Product type	PCB plug
Approval	cULus Recognized
Rated voltage (IEC)	160
Rated current (IEC)	6
Number of positions	4
Pitch	2.5 mm
Connection cross section	0.5
Connection method	Push-in spring connection
Plug-in system	COMBICON COMPACT PTSM

# Plug - PTSM 0,5/ 4-PL-2,5 WH - 1709460

## Technical data

Product family	PTSM 0,5/...-PL WH
Contact type	Female connector

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27141190
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002638
ETIM 5.0	EC002638

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

---

Approvals

cULus Recognized

---

Ex Approvals

---

Approvals submitted

---

### Approval details

# Plug - PTSM 0,5/ 4-PL-2,5 WH - 1709460

## Approvals

cULus Recognized	
	B
mm <sup>2</sup> /AWG/kcmil	26-20
Nominal current I <sub>N</sub>	5 A
Nominal voltage U <sub>N</sub>	150 V

## Accessories

### Accessories

#### Screwdriver tools

Screwdriver - SZS 0,4X2,0 - 1205202



Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap

### Additional products

Base strip - PTSM 0,5/ 4-HH0-2,5-SMD WH R32 - 1814935



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: SMD soldering

Base strip - PTSM 0,5/ 4-HV-2,5-SMD WH R44 - 1778719



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: SMD soldering, Article with anti-rotation pin

Base strip - PTSM 0,5/ 4-HV0-2,5-SMD WH R44 - 1839211



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: SMD soldering

## Plug - PTSM 0,5/ 4-PL-2,5 WH - 1709460

### Accessories

Base strip - PTSM 0,5/ 4-HTB-2,5-SMD WH R44 - 1830142



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Contact surface: Tin, Mounting: SMD soldering

Base strip - PTSM 0,5/ 4-HH-2,5-THR WH R32 - 1814867



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: THR soldering

Base strip - PTSM 0,5/ 4-HV-2,5-THR WH R32 - 1815280



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: THR soldering

Base strip - PTSM 0,5/ 4-HH-2,5-SMD WH R32 - 1708007



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: SMD soldering, Article with anti-rotation pin

Plug - PTSM 0,5/ 4-PI-2,5 WH - 1709452




Plug component, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Connection method: Push-in spring connection, Color: white, Contact surface: Tin


### Drawings

# Plug - PTSM 0,5/ 4-PL-2,5 WH - 1709460

Diagram

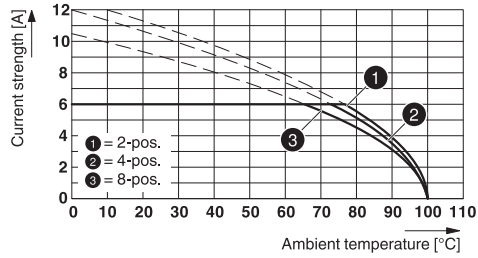

Dimensional drawing

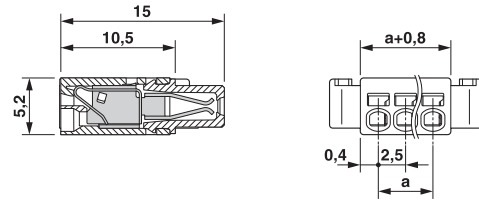

Type: PTSM 0,5/...-PL-2,5 WH with PTSM 0,5/...-HH-2,5-SMD WH R..