

Irradiated PVC Heat Shrink Tubing **pro-POWER**

**RoHS
Compliant**




Specifications:

Shrink Ratio : Full 2:1
 Longitudinal Shrinkage : Approximately 15%
 Min. Recommended Shrink Temperature : Shrink quickly at 100°C (212°F)
 Resists most chemical and oil, as well as sunlight, moisture and fungus
 UL subject 224 VW-1. CSA OFT rated for 600 V
 ASTM D 3150. MIL-1-23053/2 Class 1 with the exception of longitudinal shrinkage
 Colour : Black
 Operating Temperature Range : -20°C to +105°C

Property	Test Method	Typical Value
Specific Gravity	ASTM D792	1.32
Durometer Shore A	ASTM D2240	
Instantaneous		93
10 Seconds		88
Tensile Strength	ASTM D 2671	3,000 psi
Ultimate Elongation	ASTM D 2671	300%
Heat Aging (7 days @ 136°C)	U.L. Subject 224	
Retention of Tensile		102%
Retention of Elongation		95%
Flammability	U.L. Subject 224 VW-1	Pass
Deformation (1 hour@ 121° C)	U.L. Subject 224	0.65
Volume Resistivity	ASTM D 257	21.5×10^{12}
Dielectric Strength	ASTM D 149	1083 vpm

Diagram:

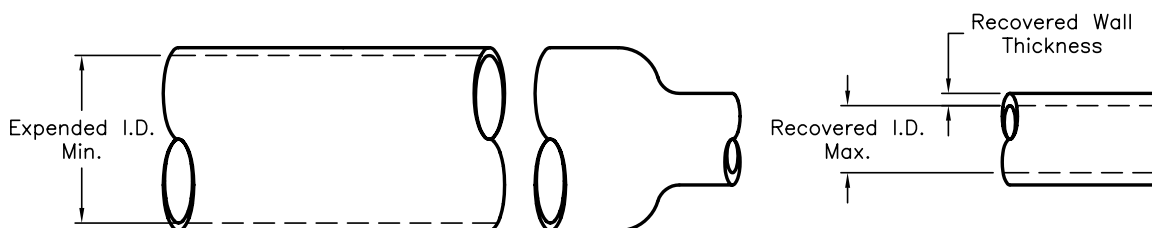

Irradiated PVC Heat Shrink Tubing **pro-POWER**

Part Number Table

Description	Size	Expended I.D. Min.		Recovered I.D. Max.		Recovered Wall Nominal		Spool Size (Feet)	Part Number
		Inches	(mm)	Inches	(mm)	Inches	(mm)		
Irradiated PVC Heat Shrink Tubing	3/64	0.046	1.17	0.023	0.58	0.02	0.51	25	PVHR-003-1025-BLK
								100	PVHR-003-1100-BLK
	1/16	0.063	1.6	0.032	0.81	0.02	0.51	25	PVHR-004-1025-BLK
								100	PVHR-004-1100-BLK
								1,000	PVHR-004-1999
	3/32	0.093	2.36	0.046	1.17	0.025	0.64	25	PVHR-006-1025-BLK
								100	PVHR-006-1100-BLK
								1,000	PVHR-006-1999
	1/8	0.125	3.18	0.063	1.6	0.025	0.64	25	PVHR-008-1025-BLK
								100	PVHR-008-1100-BLK
								1,000	PVHR-008-1999
	3/16	0.187	4.75	0.093	2.36	0.025	0.64	25	PVHR-012-1025-BLK
								100	PVHR-012-1100-BLK
								1,000	PVHR-012-1999
	1/4	0.25	6.35	0.125	3.18	0.025	0.64	25	PVHR-016-1025-BLK
								100	PVHR-016-1100-BLK
								1,000	PVHR-016-1999
	3/8	0.375	9.53	0.187	4.75	0.028	0.71	25	PVHR-024-1025-BLK
								100	PVHR-024-1100-BLK
								25	PVHR-032-1025-BLK
	1/2	0.5	12.7	0.25	6.35	0.028	0.71	100	PVHR-032-1100-BLK
								250	PVHR-032-1250
	3/4	0.75	19.05	0.375	9.53	0.033	0.84	25	PVHR-048-1025-BLK
								100	PVHR-048-1100-BLK
250								PVHR-048-1250	
1	1	25.4	0.5	12.7	0.038	0.97	25	PVHR-064-1025	
							100	PVHR-064-1100-BLK	
							250	PVHR-064-1250	
1-1/2	1.5	38.1	0.75	19.05	0.043	1.09	25	PVHR-096-1025	

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.