




All Products ▾ Solutions ▾ Support ▾

[Home](#) / [Products](#) / [Signs, Labels & Identification](#) / [Labels, Markers & Printers](#) / [Pre-Printed & Write-On Safety & QA Labels](#) / [PVS0305D7150](#)

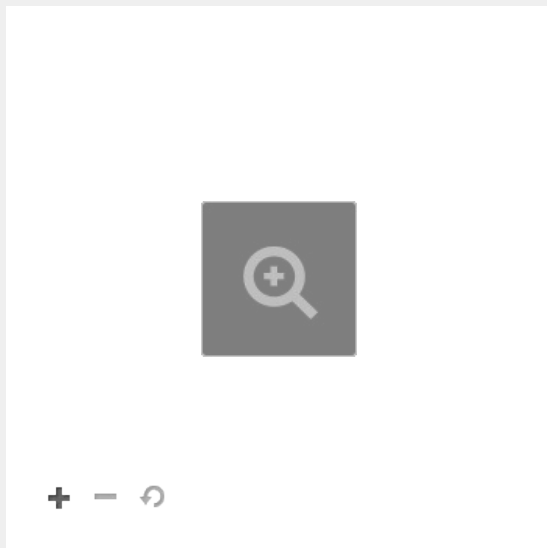

PVS0305D7150

Safety Labels

Safety Label, 3.50" x 5.00", DANGER ELECTRICAL HAZARD AUTHORIZED PERSONNEL ONLY, Outdoor Durability 2 years



Specifications

Overall Height (In.)	3.5	Maximum Operating Temperature (°C)	80
Note	Sold in US and Canada only	Maximum Operating Temperature (°F)	176
Application	Accident prevention labels indicate the potential type or degree of hazard in order to avoid accidental injury or property damage. This is achieved by conveying clear, quickly understood messages in accordance with OSHA 29 CFR 1910.145 and ANSI Z535.	Minimum Operating Temperature (°C)	-28
Color	Red/Black/White	Minimum Operating Temperature (°F)	-20
Dimensions (In.)	3.5" x 5"	Part Features	Square corners and scored backing for quick peel-off and application, 4-mil thick printed matte surface with permanent acrylic adhesive, Moisture-resistant, Suitable for indoor or sheltered environments
Environment	Outdoor Durability 2 years	Thickness (In.)	0.02
Legend	DANGER ELECTRICAL HAZARD AUTHORIZED PERSONNEL ONLY	UL Listed	No

Material

Adhesive Vinyl

RoHS Compliancy Status

Compliant

Min. Order Qty.

1

Packaging Details

UPC	61305606575	Std. Ctn. Qty.	0
Std. Pkg. Qty.	1	Std. Ctn. Volume (cf)	0.0000
Std. Pkg. Volume (cf)	0.0010		

Resources

Catalogs	Industrial Safety Solutions	US English	PDF	26.80MB		
Catalog Cut Sheets	Safety Signs & Labels Catalog	US English	PDF	8.88MB		
Part Drawings	Safety Sign PVS And PPS Style 1	US English	PDF	222.85KB		

Related Products



PCV-110BY

Voltage marker, 4.5" W x 1.13" H, '110 Volts' (legend), vinyl, black/orange, 4/card, 5 cards/package.



PCV-110CY

Voltage marker, 2.25" W x 0.50" H, '110 Volts' (legend), vinyl, black/orange, 18 marker/card, 5 cards/package.



PCV-115BY

Voltage marker, 4.5" W x 1.13" H, '115 Volts' (legend), vinyl, black/orange, 4/card, 5 cards/package.



Email Support

Email support available
24/7



800-777-3300

Monday through Thursday
7:00 am-6:30 pm CST
Friday 7:00 am-6:00 pm
CST



Where to Buy

Find a Panduit Distributor
or Partner

ABOUT US

[Research and Development](#)
[Media Resources](#)
[World Headquarters](#)
[Awards](#)
[Partner Ecosystem](#)
[Panduit Code of Conduct](#)

CAREERS AT PANDUIT

[THE HUB – PARTNER PORTAL](#)

[PRODUCT REGISTRATION](#)

[PANDUIT CONNECTIONS BLOG](#)



GET OUR CATALOG

Download the PDF or request a copy be
mailed to you.

Which catalog would you like? ▼

▶ [DOWNLOAD](#) ▶ [REQUEST COPY](#)

