




- ⊕ IP68 rating tested at 1.054kg/sq cm (15lb/sq in) 10m depth for 2 weeks and 9.84kg/sq cm (140lb/sq in) 100m depth for 12 hours
- ⊕ IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9K
- ⊕ Water and dustproof to IP68 when mated
- ⊕ 2, 3, 4, 6, 7, 9, 12 and 25 pole
- ⊕ 12A, 277V ac/dc 2 pole screw terminal, 3 pole screw terminal and crimp contacts
- ⊕ 10A, 277V ac/dc 4 pole screw terminal
- ⊕ 5A, 277V ac/dc 6 and 7 pole screw terminal
- ⊕ 5A, 150V ac/dc 9 pole crimp contacts
- ⊕ 5A, 50V ac/dc 12 pole crimp and solder contacts
- ⊕ 1A, 50V ac/dc 25 pole crimp and solder contacts
- ⊕ Plug or socket connection in each body style
- ⊕ Compact design
- ⊕ Diameter over coupling ring 38mm
- ⊕ Sealing caps available to maintain IP68 rating of unmated connectors
- ⊕ 7 body styles - flex cable, in-line flex cable, panel mount (front), panel mount (rear), PCB mount, bulkhead and flange mount
- ⊕ Leading earth contact for 3 pole socket version
- ⊕ Positive locating keyways - cannot be mis-connected
- ⊕ Easy assembly - no special tools required on screw terminal versions
- ⊕ Cable range from 3.5mm - 9mm
- ⊕ Colour coded identification variants
- ⊕ Pre-wired, overmoulded cable assemblies
- ⊕ UL, CSA and VDE approvals
- ⊕ EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

Flex Cable Connector



PX0731

- Mates with In-Line Flex or Panel Mounting Versions
- Screw Locking Ring
- Pin or Socket Versions
- Leading Earth on 3 pole connectors
- Poles 2, 3, 4, 6, 7, 9, 12, 25
- Standard Cable Acceptance (2 to 9 pole) 6-8mm, 3.5-9mm with alternative glands




| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|--------------|--------------|----------------|------------------|
| 2 | Screw | PX0736/P | PX0736/S | Supplied Fitted |
| 3 | Screw | PX0731/P | PX0731/S | Supplied Fitted |
| 3 | Crimp | PX0776/P | PX0776/S | Supplied Loose |
| 4 | Screw | PX0748/P | PX0748/S | Supplied Fitted |
| 6 | Screw | PX0739/P | PX0739/S | Supplied Fitted |
| 7 | Screw | PX0745/P | PX0745/S | Supplied Fitted |
| 9 | Crimp | PX0728/P | PX0728/S | Supplied Loose |
| 12 | Crimp/Solder | PX0794/P | PX0794/S | Order Separately |
| 25 | Crimp/Solder | PX0820/P | PX0820/S | Order Separately |

Inline Flex Cable Connector



PX0732

- Mates with Flex or Panel Mounting Versions
- Screw Locking Ring
- Pin or Socket Versions
- Leading Earth on 3 pole connectors
- Poles 2, 3, 4, 6, 7, 9, 12, 25
- Standard Cable Acceptance (2 to 9 pole) 6-8mm, 3.5-9mm with alternative glands




| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|--------------|--------------|----------------|------------------|
| 2 | Screw | PX0737/P | PX0737/S | Supplied Fitted |
| 3 | Screw | PX0732/P | PX0732/S | Supplied Fitted |
| 3 | Crimp | PX0778/P | PX0778/S | Supplied Loose |
| 4 | Screw | PX0749/P | PX0749/S | Supplied Fitted |
| 6 | Screw | PX0740/P | PX0740/S | Supplied Fitted |
| 7 | Screw | PX0746/P | PX0746/S | Supplied Fitted |
| 9 | Crimp | PX0729/P | PX0729/S | Supplied Loose |
| 12 | Crimp/Solder | PX0795/P | PX0795/S | Order Separately |
| 25 | Crimp/Solder | PX0821/P | PX0821/S | Order Separately |

Pre Wired Flex Cable Connector



PX0700

- Overmoulded cable assemblies
- Up to 14mm dia cable with PVC or PU jackets
- PX0700 flex cable connector
- Mates with in-line flex connector and all panel connectors

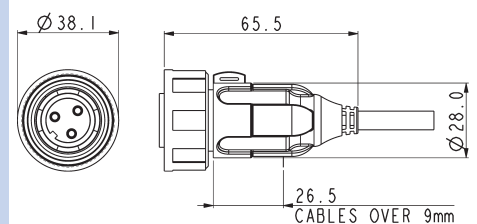


Front Panel Mounting Connector



PX0730/P

- Mates with Flex Cable Connector
- Front panel mounting
- Single Hole Fixing
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12, 25

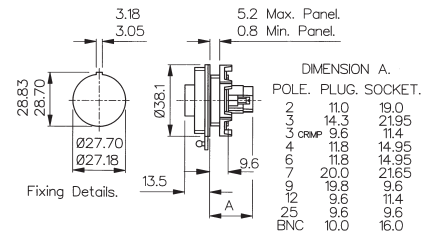


| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|--------------|--------------|----------------|------------------|
| 2 | Screw | PX0735/P | PX0735/S | Supplied Fitted |
| 3 | Screw | PX0730/P | PX0730/S | Supplied Fitted |
| 3 | Crimp | PX0779/P | PX0779/S | Supplied Loose |
| 4 | Screw | PX0747/P | PX0747/S | Supplied Fitted |
| 6 | Screw | PX0738/P | PX0738/S | Supplied Fitted |
| 7 | Screw | PX0744/P | PX0744/S | Supplied Fitted |
| 9 | Crimp | PX0727/P | PX0727/S | Supplied Loose |
| 12 | Crimp/Solder | PX0796/P | PX0796/S | Order Separately |
| 25 | Crimp/Solder | PX0822/P | PX0822/S | Order Separately |

Rear Panel Mounting Connector



PX0709/x/xx

- Mates with Flex Cable Connector
- Rear panel mounting
- Single Hole Fixing
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12 or 25

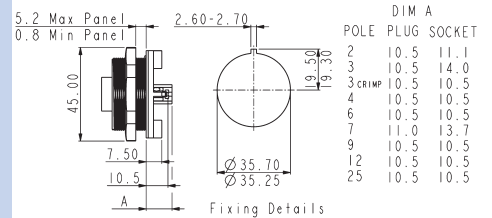


| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|--------------|--------------|----------------|------------------|
| 2 | Screw | PX0709/P/02 | PX0709/S/02 | Supplied Fitted |
| 3 | Screw | PX0709/P/03 | PX0709/S/03 | Supplied Fitted |
| 3 | Crimp | PX0708/P/03 | PX0708/S/03 | Supplied Loose |
| 4 | Screw | PX0709/P/04 | PX0709/S/04 | Supplied Fitted |
| 6 | Screw | PX0709/P/06 | PX0709/S/06 | Supplied Fitted |
| 7 | Screw | PX0709/P/07 | PX0709/S/07 | Supplied Fitted |
| 9 | Crimp | PX0708/P/09 | PX0708/S/09 | Supplied Loose |
| 12 | Crimp/Solder | PX0708/P/12 | PX0708/S/12 | Order Separately |
| 25 | Crimp/Solder | PX0708/P/25 | PX0708/S/25 | Order Separately |

Spring Loaded Sealing Cap



PX0713

- IP54 rated
- Spring loaded
- Clip shut to seal
- For use with front of panel mounting connector types

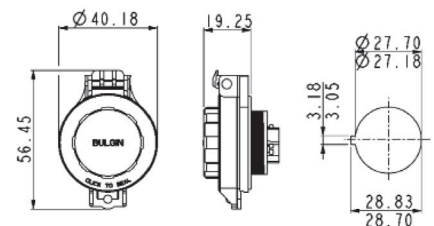


PCB Mounting Connector



PX0707/P/12

- Mates with Flex Cable connector
- Rear panel mounting
- No. poles: 3, 4, 6, 9, 12 or 25
- Pin or socket versions
- Pre-loaded Gold Plated contacts

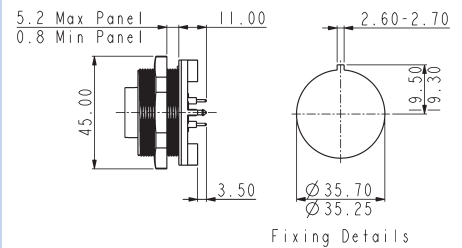


| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|-------------|--------------|----------------|-----------------|
| 3 | PCB | PX0707/P/03 | PX0707/S/03 | Supplied Fitted |
| 4 | PCB | PX0707/P/04 | PX0707/S/04 | Supplied Fitted |
| 6 | PCB | PX0707/P/06 | PX0707/S/06 | Supplied Fitted |
| 9 | PCB | PX0707/P/09 | PX0707/S/09 | Supplied Fitted |
| 12 | PCB | PX0707/P/12 | PX0707/S/12 | Supplied Fitted |
| 25 | PCB | PX0707/P/25 | PX0707/S/25 | Supplied Fitted |

Bulkhead Flange Mounting Connector



PX0756/S

- Mates with Flex Cable Connector
- Screw Fixing Flange
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12, 25
- Supplied with sealing gasket and screw sealing grommets




| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|--------------|--------------|----------------|------------------|
| 2 | Screw | PX0757/P | PX0757/S | Supplied Fitted |
| 3 | Screw | PX0756/P | PX0756/S | Supplied Fitted |
| 3 | Crimp | PX0787/P | PX0787/S | Supplied Loose |
| 4 | Screw | PX0761/P | PX0761/S | Supplied Fitted |
| 6 | Screw | PX0758/P | PX0758/S | Supplied Fitted |
| 7 | Screw | PX0760/P | PX0760/S | Supplied Fitted |
| 9 | Crimp | PX0762/P | PX0762/S | Supplied Loose |
| 12 | Crimp/Solder | PX0798/P | PX0798/S | Order Separately |
| 25 | Crimp/Solder | PX0823/P | PX0823/S | Order Separately |

Low Profile Flange Mounting Connector



PX0765/S

- Screw Flange Fixing
- Pin or Socket Versions
- Poles 2, 3, 4, 6, 7, 9, 12, 25
- Mates with Flex Cable Connector
- Supplied with sealing gasket and screw sealing grommets

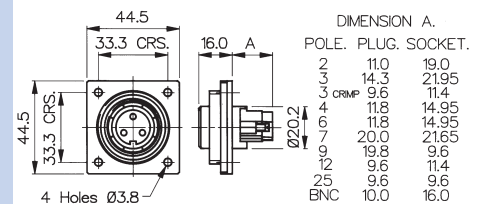

| Poles | Termination | Pin Contacts | Socket Contact | Contacts |
|-------|--------------|--------------|----------------|------------------|
| 2 | Screw | PX0764/P | PX0764/S | Supplied Fitted |
| 3 | Screw | PX0765/P | PX0765/S | Supplied Fitted |
| 3 | Crimp | PX0781/P | PX0781/S | Supplied Loose |
| 4 | Screw | PX0766/P | PX0766/S | Supplied Fitted |
| 6 | Screw | PX0767/P | PX0767/S | Supplied Fitted |
| 7 | Screw | PX0768/P | PX0768/S | Supplied Fitted |
| 9 | Crimp | PX0769/P | PX0769/S | Supplied Loose |
| 12 | Crimp/Solder | PX0797/P | PX0797/S | Order Separately |
| 25 | Crimp/Solder | PX0824/P | PX0824/S | Order Separately |

Coloured Contact Inserts



Coloured Inserts

- With or without matching gland nut
- Positive visual identification
- Available in; Black, Blue, Green, Grey, Light Grey, Red, White and Yellow

Contact Inserts Colour Options

| Part No | Suffix Colour |
|---------|---------------|
| Blank | Black |
| BL | Blue |
| GN | Green |
| GY | Grey |
| LG | Light Grey |
| RD | Red |
| WH | White |
| YL | Yellow |

Insert/Gland Nut Combinations

| | |
|---|-------------------------------|
| 1 | Insert and Gland Nut Coloured |
| 2 | Insert Only Coloured |

E.g. PX0731/P/YL1 = Yellow insert and gland nut

Contacts for 12 and 25 Pole Inserts



12 and 25 way contacts

- Crimp or Solder Pins and Sockets
- Gold Plated
- Current ratings:
12 way: 5A, 50V
25 way: 1A, 50V

Contacts - Solder & Crimp for 12 and 25 pole

| Contacts (for 25 pole) (Supplied in packs of 10) | Solder | Crimp |
|---|-----------|--------|
| Pins | SA3180/1 | SA3180 |
| Sockets | SA 3179/1 | SA3179 |
| Contacts (for 12 pole) (Supplied in packs of 10) | Solder | Crimp |
| Pins | SA3348/1 | SA3348 |
| Sockets | SA3347/1 | SA3347 |

Assembly Tools



PNo 14025 and 13027

- Crimp Tools for 3, 9, 12 and 25 pole crimp contacts
- Insertion/Extraction Tool for 25 pole contacts

Tools

| | |
|-------------------------------------|-----------------|
| Crimp Tool (25 pole) | PNo. 14025/1AMP |
| Crimp Tool (12 pole) | PNo. 14025 |
| Positioner (12 pole) | PNo. 14025/5AMP |
| Crimp Tool (9 pole) | PNo. 13826 |
| Crimp Tool (3 pole) | PNo. 14232 |
| 3 pole positioner | PNo. 14232/1 |
| Insertion/Extraction Tool (25 pole) | PNo. 13027 |
| Insertion/Extraction Tool (12 pole) | PNo. 13027/1 |
| Insertion/Extraction Tool (3 pole) | PNo. 13027/3 |

Cable Glands



SA3253

- Pack of alternative cable glands to suit cables from 3.5 to 9mm dia.

Cable Acceptance - Alternatives

| Gland Diameter | Gland Part No. | Gland Colour | Additional Suffix |
|----------------|----------------|---|------------------------|
| 6-8mm | 12023 | Black | Standard for 2-12 pole |
| 3.5-5mm | SA3426 | Grey | Suffix /04† |
| 5-7mm | 12023/1 | White | Suffix /05 |
| 7-9mm | 12023/2 | Yellow | Suffix /07* |
| Gland Pack | SA3253 | Pack of 3 glands to suit cables 3.5-5mm, 5-7mm & 7-9mm dia† | |

*Note: 7-9mm gland standard for 25 way, no suffix required.
†Includes additional black gland cage for 3.5-5mm dia. cable range.

To order connector with alternative cable gland add suffix to part no. e.g. PX0731/P/07 = PX0731 3 pin connector with cable gland to suit 7-9mm dia. cable.

Cable Acceptance - Standard as supplied


| No. Contacts | Cable Diameter or Type |
|--------------|------------------------|
| 2-12 Pole | 6-8mm |
| 25 Pole | 7-9mm |

Sealing Cap and Assembling Tool



PX0734 PX0733

- Maintains IP68 Rating of Unmated Connectors
- Can be used to remove Inserts
- PX0734 for Flex Cable Connector
- PX0733 for In-line Flex, Front Panel, Bulkhead and Flange mount connectors
- PX0711 for PCB and Rear Panel Mount connectors

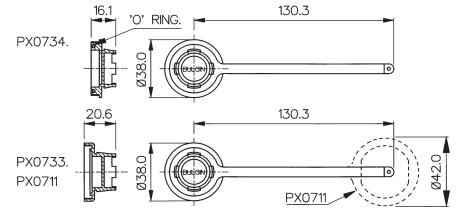


Rear of Panel Back Shell



PX0799

- Provides environmental seal to rear of panel
- Standard cable acceptance 6-8mm, 3.5 to 9mm with alternative glands
- For use on front panel mounting connectors
- Replaces mounting nut in panel connector

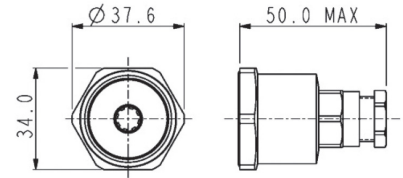


PVC Insulation Boot



PNo. 12855

- Shock protection for rear of connector
- Flammability Rating UL94V-0
- Fits Front Panel Mount Versions only

12855 for panel mounting types only.




Cable Support Accessory



PNo. 12237

- Gives Extra Support to the Cable
- Suitable for 5-7mm and 7-9mm Cable Diameters

12237 provides additional cable support. Suitable for 5-7mm and 7-9mm cables.



| PX0xxx | X | XX | XX | X |
|--------------------|---|---|---|---|
| Body Styles | Contacts Type P = Pin S = Socket | Cable Acceptance or PCB/Rear Panel Mounting Flex Cable and In-line Flex Connectors cable acceptance use: Blank = 6-8mm (Black) standard for 2-12 pole 04 = 3.5-5mm (Grey) 05 = 5-7mm (White) 07 = 7-9mm (Yellow) (standard for 25 way, no suffix required) PCB (PX0707) and Rear Panel Mount connectors (PX0708 and PX0709) use: 02 = 2 pole 03 = 3 pole 04 = 4 pole 06 = 6 pole 07 = 7 pole 09 = 9 pole 12 = 12 pole 25 = 25 pole Front Panel, Bulkhead and Flange Mount - not required: | Insert/Gland Nut Colour Blank = Black BL = Blue GN = Green GY = Grey LG = Light Grey RD = Red WH = White YL = Yellow | Insert/Gland Nut Colour Combination 1 = Insert and Gland Nut Coloured 2 = Insert only Coloured |

Examples:

PX0707/P/06= PCB Panel pin connector, pin contacts, 6 pole
 PX0731/S = Flex Cable connector, socket contacts, 3 pole
 PX0732/P/07/BL2 = In-Line Flex Cable connector, pin contacts, 3 pole, 7-9mm cable acceptance, blue insert













PCB Layouts

Sockets




Contact Nos viewed from rear of panel

Pins

Contact Nos viewed from rear panel rear of panel



Electrical:

| | | | | | | |
|--|---|------|------|------|-----|-----|
| No. Poles: | 2, 3 | 4 | 6, 7 | 9 | 12 | 25 |
| Current Rating: | | | | | | |
| VDE | 12A | 10A | 5A | 5A | 5A | 1A |
| UL, CSA | 12A | 10A | 5A | 5A | 5A | 1A |
| Voltage Rating (ac/dc): | 277V | 277V | 277V | 150V | 50V | 50V |
| Contact Resistance: | <10mΩ (2-9 Pole) | | | | | |
| | <5mΩ (12 Pole) | | | | | |
| | <5mΩ (25 Pole) | | | | | |
| Insulation Resistance: | >10 ⁴ MΩ @ 500V d.c. (2-9 Pole) | | | | | |
| AC Breakdown voltage: | 4kV Pole - Pole (2-9 Pole) | | | | | |
| | 6kV Poles - Panel (Low Profile Flange and Panel Types - 2-9 Pole) | | | | | |
| | 7.5kV Poles - Panel (Other Types - 2-9 Pole) | | | | | |
| Operating Temp. Range: | -20°C to +70°C | | | | | |
| Approvals: | E93288 and E337507 | | | | | |
|  UL | LR80968-30 | | | | | |
|  CSA | 40023148 | | | | | |
|  VDE | | | | | | |
| | Overmoulded cable assemblies approvals to customer requirements. | | | | | |

Material:

| | |
|----------------------------|---|
| Body Mouldings: | Glass Filled Polyamide UL94HB |
| Inserts (2-25 pole): | Polyamide UL94V-0 |
| PX0707 | Polyamide UL94V-0 |
| PX0708 | Polyamide UL94V-0 |
| PX0709 | Polyamide UL94V-0 |
| Overmoulded types: | |
| Body Mouldings: | Polyurethane |
| Flammability Rating: | UL94V-HB |
| Contacts: | |
| Screw Terminal: | Brass, Nickel Plated |
| Crimp (9 pole): | Copper Alloy, Tin Plated |
| Crimp/Solder (12+25 Pole): | Copper Alloy, Gold Plated (0.1µm on Nickel) |
| BNC inserts: | Brass, Nickel Plated |
| BNC contacts: | Brass, Silver Plated |
| RoHS | Compliant |

Mechanical:


| | |
|---|--|
| Sealing: | IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9k |
| | IP68, EN 60529:1992+A2:2013 Tested @ 1.054kg/sq.cm. (15lb/sq.in.) 10m depth for 2 weeks. |
| | EN 60529:1992 +A2:2013 Tested @ 9.84kg/sq.cm. (140lb/sq.in.) 100m depth for 12 hours. |
| Salt Mist: | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 |
| Cable Acceptance: | |
| 2-12 Pole - standard gland: | 6-8mm dia |
| 2-12 Pole - alternative glands: | 3.5-9mm dia |
| 25 Pole - standard gland: | 7-9mm dim |
| 25 Pole - alternative glands: | 3.5-7mm dim |
| Contact Accommodation: | |
| 2 and 3 pole screw terminals: | 4mm ² (12AWG) max |
| 3 pole crimp: | 1.0-1.5mm ² (14-18AWG) max |
| 4, 6 and 7 pole: | 1.5mm ² (16AWG) max |
| 9 pole: | 0.12-0.21mm ² (24-26AWG) |
| 12 pole: | 0.32mm ² (22-26AWG) max |
| 25 pole: | 0.12-0.21mm ² (24-26AWG) |
| Terminations: | |
| 2-7 Pole: | Screw Terminals |
| 3 Pole: | Screw Terminals & Crimp |
| 9 Pole: | Crimp Contacts |
| 12 Pole: | Crimp & Solder Contacts |
| 25 Pole: | Crimp & Solder Contacts |
| Tightening Torques: | |
| Flex Mounting/In-Line: | Gland Nut: 1.13Nm (10lbf.in.) |
| Panel Mounting: | Rear Fixing Nut: 1.7Nm (15lbf.in.) |
| | Front Fixing Nut: 1.4Nm (12.4lbf.in.) |
| Surface/Bulkhead and Low Profile Flange Mounting: | 4 Fixing Screws (using washers supplied) 0.34Nm (3lbf.in.) |
| Sealings Caps/Locking Ring: | 1.13Nm (10lbf.in.) |
| Rear thread, Front Panel Connector: | M27 x 1.0-6H |
| Thread, Front Panel Connector: | M35 x 1.0-6H |




Cable Joiner



PX0777

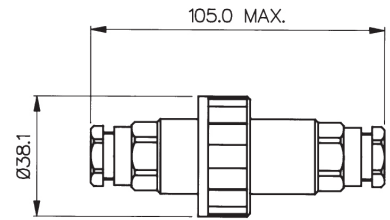- IP68 & IP69k Rating
- For Sealed In-Line Connections
- Standard Cable Acceptance 6-8mm
- Cable Range 3.5-9mm (using alternative glands)
- Supplied with 4, 6 or 8 way Terminal Block
- Available Moulded in Black or Orange




| Specifications | PX0777 | PX0777/4POLE, 6POLE, 8POLE | POLE Configurations |
|--------------------------|---|---|---|
| Rating: | 16A, 250V a.c. | 10A, 250V a.c. | |
| Wire Termination: | 3 way Terminal Block | 4, 6, 8 way Terminal Block |  |
| Conductor Accommodation: | 2.5mm ² max (14AWG) | 1.5mm ² max (16AWG) |  |
| Cable Acceptance: | 6-8mm dia alternative glands available on request | 6-8mm dia alternative glands available on request |  |
| Material: | Glass Filled Polyamide UL94-HB | Glass Filled Polyamide UL94-V0 | |
| Sealing: | IP68 to BSEN 60529 : 1992 1.054kg/sq.cm. (15lbs/sq.in.) 10m depth for 2 weeks | IP68 to BSEN 60529 : 1992 1.054kg/sq.cm. (15lbs/sq.in.) 10m depth for 2 weeks | |
| Salt Mist | IP69k to DIN 40050-9 | IP69k to DIN 40050-9 | |
| Operating Temp. Range: | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 | |
| Colour: | -20°C to +70°C | -20°C to +70°C | |
| | Black Orange (Add /OR to PNo.) | Black Orange (Add /OR to PNo.) | |
| RoHS | Compliant | Compliant | |

Examples


- PX0777 – 3 Pole 6-8mm Black.
- PX0777/04 – 3 Pole 3.5-5.0mm Black.
- PX0777/04/OR – 3 Pole 3.5-5.0mm Orange.
- PX0777/4POLE – 4 Pole 6-8mm Black.
- PX0777/6POLE/04 – 6 Pole 3.5-5.0mm Black.
- PX0777/8POLE/04/OR – 8 Pole 3.5-5.0mm Orange.

| | | | |
|---------------|--|---|------------------------------|
| PX0777 | XPOLE | XX | XX |
| Part No | Blank = 3 Pole 4POLE = 4 Pole 6POLE = 6 Pole 8POLE = 8 Pole | Blank = 6-8mm 04 = 3.5-5mm 05 = 5-7mm 07 = 7-9mm | Blank = Black OR = Orange |

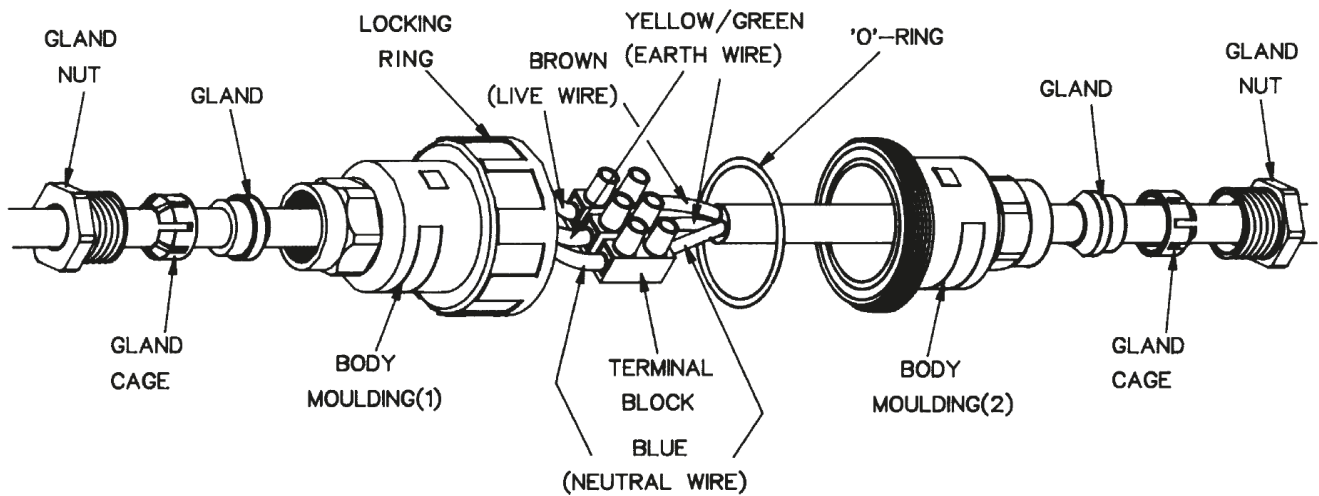

1. Strip wires to dimensions shown.
2. Assemble components parts onto cable as shown, then connect wires to terminal block.

ENSURING WIRES CONNECTED INTO ONE SIDE OF TERMINAL BLOCK MATCH WIRES CONNECTED INTO THE OTHER SIDE.

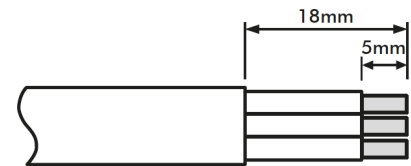

Wire stripping details

i.e. Brown to Brown (Live)
Blue to Blue (Neutral)
Green/Yellow to Green/Yellow (Earth)

3. Bring the two body mouldings together ensuring the 'O' ring is correctly located in groove then lock together with locking ring, ensure ring is fully tightened.

Put gland cage over gland and push fully home into its appropriate body then fully tighten gland nuts.

4. To ensure a good seal, all surfaces must be completely free of dust, grease or any other contamination.

THIS CABLE CONNECTOR IS SUITABLE FOR USE WITH LOADS NOT EXCEEDING 16 AMPS USING 1.5mm² CABLE

ALWAYS USE WITH SUPPLY PROTECTED BY AN RCD, IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN.

DANGER

DISCONNECT MAINS
SUPPLY BEFORE
DISMANTLING
CONNECTOR