



Technical Data Sheet

STRAIGHT PLUG SOLDER TYPE CABLE .085

PAGE 1/2 ISSUE 1427C SERIES SMA PART NUMBER R125052002



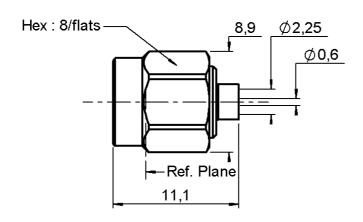



CECC 22111-802-04

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)	
Body	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2	
Center contact Outer contact	BRASS	GOLD 1.3 OVER NICKEL2	
Insulator	PTFE	-	
Gasket	SILICONE RUBBER		
Others parts	STAINLESS STEEL	PASSIVATED.	
-	-	-	
-	-	-	



Technical Data Sheet

STRAIGHT PLUG SOLDER TYPE CABLE .085

PAGE **2/2** ISSUE 1427C SERIES SMA PART NUMBER R125052002

PACKAGING

100	Contact us	Contact us
Standard	Unit	Other

ELECTRICAL CHARACTERISTICS

Impedance 50 Frequency 0-27 GHz **VSWR** 1.07 0.0080 x F(GHz) Maxi Insertion loss 0.03 √F(GHz) dB Maxi RF leakage 90 - F(GHz)) dB Maxi - (Voltage rating 335 Veff Maxi Dielectric withstanding voltage 750 Veff mini Insulation resistance 5000 $M\Omega$ mini

MECHANICAL CHARACTERISTICS

Center contact retention

Axial force - Mating End NA N mini Axial force - Opposite end NA N mini N.cm mini NA Torque

Recommended torque

100 Mating N.cm Panel nut NA N.cm Clamp nut NA N.cm A/F clamp nut 0,0000 mm

500 Mating life Cycles mini g

Weight 2,3000

ENVIRONMENTAL

Operating temperature -65/ 165 C Hermetic seal NA Atm.cm3/s Panel leakage NA

SPECIFICATION

CABLE ASSEMBLY

Stripping	а	b	С	d	е	f
mm	3,17	0	0	0	0	0

Assembly instruction: Solder 01

Recommended cable(s)

RG 405 KS₁

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off 130 N mini - torque NA N.cm

TOOLING

Part Number	Description	Hexagon
R282120010	SMA TOOLBOX	
R282051000	STRIPPING TOOL	
R282063000	POINTER GAUGE	
R282730040	INSULATOR MOUNTING TOOL	
R282740000	SOLDERING MOUNTING	
R282744060	SOLDERING POSITIONER (BODY)	
R282744220	SOLDERING POSITIONER(CENTER CONTACT)	
R282862060	CONTROL GAUGE	
R282914000	CONTROLE GAUGE	
R282915010	DIELECTRIC RECESS TOOL	

OTHER CHARACTERISTICS