



**Ferrule**  
**T&B Catalog Number:**

F8010  
 78621033571  
 Active

**UPC Number:**  
**Status:**  
**Description:**


Nylon Insulated Twin Ferrule, Length .906 Inches/23.0mm, Pin Length .472 Inches/12mm, Pin Diameter .150 Inches/3.8mm, Base Diameter .339 Inches/8.6mm, Conductor Range 2x12 AWG/2x4.00mm, Color Gray, Copper, Tin Plated

**WEB\_USE**

US Cutsheet PDF Catalog Link <http://www-public.tnb.com/contractor/docs/stakon.pdf>

**Features**

Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks.

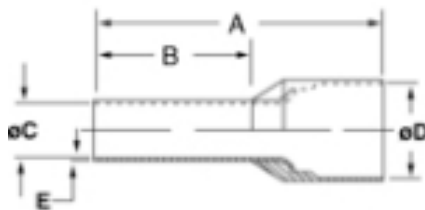

**General**

Ferrule Type	Insulated Twin
Insulation Type	Insulated Nylon
Material	Copper
Finish	Electro -Tin Plated
Color	Gray
Wire Range	2x12
Wire Size (mm <sup>2</sup> )	2x4.00

**Dimension Information**

A (mm)	23.0
B (mm)	12.0
Diameter C (inches)	.150
Diameter C (mm)	3.8
Diameter D (inches)	.339
Diameter D (mm)	8.6
E (mm)	.15
A (inches)	.906
B (inches)	.472
E (inches)	.006

**Specifications**

Temperature Rating	105°C
Flammability Rating	UL 94 V-2

**Tooling**

Tool Charts	Available on Website
Application Tools	ERG4
Recommended Tool	ERG4

**Packaging**

T&B Order Multiple	100
T&B Inner Pack	100
Package in Units	1000
T&B Sold in UOM	Each
T&B Weight Per UOM	1.25 lbs. per 1000

**Application Support**

Overview	Available on Website
Wire Guide Tables	Available on Website
<b>Notes</b>	
	Ferrule dimensions conform to DIN 46228, Part 4. 6MM Die
<b>Certifications</b>	
RoHS Compliance	Yes

**For further technical assistance, please contact us...**

Thomas & Betts - USA  
8155 T&B Blvd.  
Memphis, TN 38125  
www.tnb.com

T&B Technical Support  
MS 3B-50  
8155 T&B Blvd.  
Memphis, TN 38125

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email:techsupport@tnb.com