



# Sta-Kon®

## Ferrule

### T&B Catalog Number:

F8010

### UPC Number:

78621033571

### Status:


Active

### Description:

Polypropylene Insulated Twin Ferrule, Length .906 Inches/23.0mm, Pin Length .472 Inches/12mm, Pin Diameter .150 Inches/3.8mm, Base Diameter .339 Inches/8.6mm, Conductor Range 2x12 AWG/2x4.00mm, Color Gray, Copper, Tin Plated

### Features

Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks.

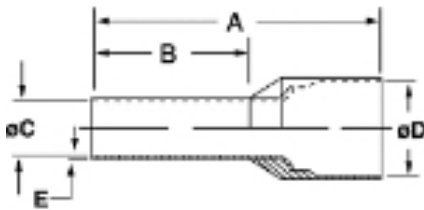

### General

Ferrule Type	Insulated Twin
Insulation Type	Polypropylene
Material	Copper
Finish	Electro -Tin Plated
Color	Gray
Wire Range	2x12
Wire Size (mm <sup>2</sup> )	2x4.00

### Dimension Information

A (mm)	23.0
B (mm)	12.0
Diameter C (inches)	.150
Diameter C (mm)	3.8
Diameter D (inches)	.339
Diameter D (mm)	8.6
E (mm)	.15
A (inches)	.906
B (inches)	.472
E (inches)	.006

### Specifications

Temperature Rating	105°C
Flammability Rating	94HB

### Tooling

Tool Charts	Available on Website
Application Tools	ERG4
Recommended Tool	ERG4

### Packaging

T&B Order Multiple	100
T&B Inner Pack	100
Package in Units	1000
T&B Sold in UOM	Each
T&B Weight Per UOM	1.25 lbs. per 1000

### Application Support

Overview	Available on Website
----------	----------------------

Wire Guide Tables Available on Website

---

**Notes**

Ferrule dimensions conform to DIN 46228, Part 4.  
6MM Die

---

**Certifications**

---

RoHS Compliance Yes

---

**For further technical assistance, please contact us...**

Thomas & Betts - USA  
8155 T&B Blvd.  
Memphis, TN 38125  
www.tnb.com

T&B Technical Support  
MS 3B-50  
8155 T&B Blvd.  
Memphis, TN 38125

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email:techsupport@tnb.com