



Interlocking System Provides Design Flexibility

Right Angle Modular LED Bargraphs

Features

- Two, Three and Five LED Modules Snap Together to Form the Desired Configurations
- Solid-State, High Shock/Vibration Resistant
- Fast Turn On/Off Time
- Long Life / 100,000+ Hours
- Available in Standard and Special Colors
- Available in White or Black Housings
- Available in Custom Configurations




Applications

- Instrument Panels
- PCB Mounted Status Panel Indicator
- Indicators for Telecom/Data Comm /Networking Products

Options

- Bi-Color/Tri-Color LEDs
- Sunlight Visible LEDs
- Low Current 2mA LEDs
- Resistor LEDs
- White Housing

Right Angle Mount

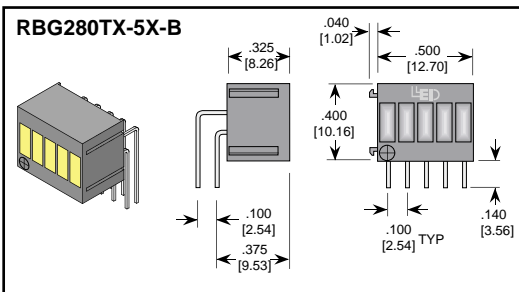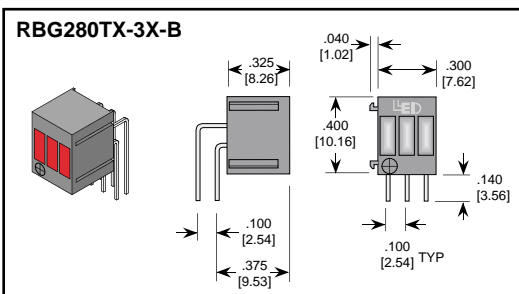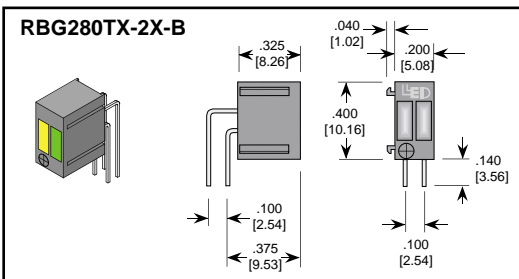

Part Selection

Part Number	Color	Lens Type/Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
RBG280T3-2R-B	HE RED	DIFFUSED	20	5.0	2.0/3.0	635	
RBG280T3-2Y-B	YELLOW		20	7.6	2.2/3.0	585	
RBG280T3-2G-B	HE GREEN		20	7.6	2.2/3.0	565	

Part Number	Color	Lens Type/Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
RBG280T3-3R-B	HE RED	DIFFUSED	20	5.0	2.0/3.0	635	
RBG280T3-3Y-B	YELLOW		20	7.6	2.2/3.0	585	
RBG280T3-3G-B	HE GREEN		20	7.6	2.2/3.0	565	

Part Number	Color	Lens Type/Color	Electrical-Optical Characteristics (Ta = 25°C)				Full Viewing Angle
			If = mA typ	Iv mcd typ	Vf = V typ/max	λP nm	
RBG280T3-5R-B	HE RED	DIFFUSED	20	5.0	2.0/3.0	635	
RBG280T3-5Y-B	YELLOW		20	7.6	2.2/3.0	585	
RBG280T3-5G-B	HE GREEN		20	7.6	2.2/3.0	565	

Example of part number ordering code

