


## Thick Film Surface Mount Chip Resistor, Wraparound, Extremely Low Value (0.01 Ω to 0.976 Ω)



### FEATURES

- Extremely low resistance values (0.01 Ω to 0.976 Ω)
- Suitable for current sensing and shunts
- Metal glaze on high quality ceramic
- Protective overglaze
- Lead (Pb)-free solder contacts on Ni barrier layer
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

STANDARD ELECTRICAL SPECIFICATIONS					
GLOBAL MODEL	POWER RATING $P_{70^{\circ}\text{C}}$ W	TEMPERATURE COEFFICIENT ppm/°C	RESISTANCE RANGE Ω		E-SERIES
			± 1.0 %	± 5.0 %	
RCWE0402	0.125	± 400	-	0.033 to 0.05	24
		± 200	0.051 to 0.18		
		± 100	0.2 to 0.976		
RCWE0603	0.2	± 700	-	0.010 to 0.018	24
		± 400	0.02 to 0.03		
		± 200	0.033 to 0.1		
RCWE0805	0.25	± 100	0.11 to 0.976		24
		± 400	-	0.010 to 0.018	
		± 300	0.02 to 0.03		
RCWE1206	0.5	± 200	0.033 to 0.05		24
		± 100	0.051 to 0.976		
		± 600	-	0.010 to 0.018	
RCWE1210	1.0	± 300	0.02 to 0.03		24
		± 200	0.033 to 0.05		
		± 100	0.051 to 0.976		
RCWE2010	1.0	± 500	-	0.010 to 0.018	24
		± 300	0.02 to 0.03		
		± 200	0.033 to 0.05		
RCWE2512	2.0	± 100	0.051 to 0.976		24
		± 600	-	0.010 to 0.018	
		± 300	0.02 to 0.03		
RCWE2512	2.0	± 200	0.033 to 0.05		24
		± 100	0.051 to 0.976		
		± 600	-	0.010 to 0.018	

**Notes**

- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material
- Part marking: Reference Surface Mount Resistor Marking document number 20020


GLOBAL PART NUMBER INFORMATION															
GLOBAL PART NUMBERING EXAMPLE: RCWE060351L0FNEA															
R	C	W	E	0	6	0	3	5	1	L	0	F	N	E	A
GLOBAL MODEL			VALUE			TOLERANCE			TCR			PACKAGING			
RCWE0402 RCWE0603 RCWE0805 RCWE1206 RCWE1210 RCWE2010 RCWE2512			$L = m\Omega^*$ R = Decimal 10L0 = 0.01 Ω R470 = 0.47 Ω * use "L" for resistance values < 0.1 Ω			F = ± 1.0 % J = ± 5.0 %			K = ± 100 ppm/°C N = ± 200 ppm/°C M = ± 300 ppm/°C Q = ± 400 ppm/°C P = ± 500 ppm/°C T = ± 600 ppm/°C G = ± 700 ppm/°C			EA = Lead (Pb)-free, tape/reel			

TECHNICAL SPECIFICATIONS								
PARAMETER	UNIT	RCWE0402	RCWE0603	RCWE0805	RCWE1206	RCWE1210	RCWE2010	RCWE2512
Operating Temperature Range	°C	- 55 to + 155						
Maximum Operating Voltage	V	$(P \times R)^{1/2}$						
Insulation Voltage $U_{ins}$ (1 min)	V	> 75	> 100	> 200	> 300	> 300	> 300	> 300
Insulation Resistance	Ω	> $10^9$						
Weight/1000 pieces (typical)	g	0.7	3	5.5	10.5	17.5	26	40.5

**DIMENSIONS**


MODEL	DIMENSIONS (in mm)						SOLDER PAD DIMENSIONS (in mm)		
	RESISTANCE RANGE Ω	L	W	H	T1	T2	a	b	l
RCWE0402	0.033 to 0.976	1.03 ± 0.05	0.5 ± 0.05	0.4 ± 0.1	0.3 ± 0.15	0.2 ± 0.1	0.7	0.7	0.3
RCWE0603	0.01 to 0.03	1.6 ± 0.1	0.85 ± 0.1	0.5 ± 0.1	0.5 ± 0.2	0.3 ± 0.2	0.9	1.0	0.4
	0.033 to 0.976				0.3 ± 0.2		0.7		0.8
RCWE0805	0.01 to 0.03	2.0 ± 0.15	1.3 ± 0.1	0.55 ± 0.1	0.6 ± 0.2	0.35 ± 0.2	1.0	1.4	0.6
	0.033 to 0.976				0.4 ± 0.2		0.8		1.0
RCWE1206	0.01 to 0.03	3.1 ± 0.15	1.6 ± 0.15	0.6 ± 0.1	0.9 ± 0.2	0.45 ± 0.2	1.3	1.8	1.0
	0.033 to 0.05				0.8 ± 0.2		1.2		1.8
	0.051 to 0.976				0.45 ± 0.2		1.0		1.8
RCWE1210	0.01 to 0.03	3.1 ± 0.2	2.5 ± 0.2	0.6 ± 0.1	0.8 ± 0.2	0.4 ± 0.2	1.3	2.6	1.1
	0.033 to 0.976				0.4 ± 0.2		0.9		2.6
RCWE2010	0.01 to 0.03	5.0 ± 0.2	2.5 ± 0.15	0.6 ± 0.1	1.6 ± 0.3	0.6 ± 0.2	2.3	3.0	1.4
	0.033 to 0.05				0.7 ± 0.3		1.4		3.0
	0.051 to 0.976				0.7 ± 0.3		1.4		3.0
RCWE2512	0.01 to 0.03	6.3 ± 0.2	3.15 ± 0.15	0.6 ± 0.1	2.0 ± 0.3	0.6 ± 0.2	2.8	3.6	1.4
	0.033 to 0.05				0.8 ± 0.3		1.6		3.6
	0.051 to 0.976				0.8 ± 0.3		1.6		3.6

Thick Film Surface Mount Chip Resistor,  
Wraparound, Extremely Low Value (0.01 Ω to 0.976 Ω)

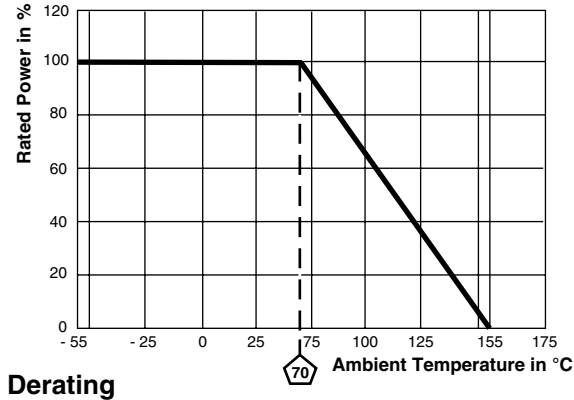

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS
Thermal Shock	MIL-STD-202, Method 107, - 55 °C to + 125 °C, 300 cycles at each extreme	± (1.0 % + 0.0005 Ω) ΔR
Short Time Overload	2 x rated power; duration according the model	± (0.5 % + 0.0005 Ω) ΔR
High Temperature Exposure	MIL-STD-202, Method 108, 1000 h at T = 125 °C, 0 % power	± (2.0 % + 0.0005 Ω) ΔR
Temperature Cycling	JESD 22, Method JA-104, 1000 cycles ( - 55 °C to + 125 °C)	± (2.0 % + 0.0005 Ω) ΔR
Biased Humidity	MIL-STD-202, Method 103, 1000 h 85 °C/85 % RH, 10% x (P x R) <sup>1/2</sup>	± (2.0 % + 0.0005 Ω) ΔR
Mechanical Shock	MIL-STD-202, Method 213, Condition C, 10 g's, 6 ms (half sine), 3 directions	± (1.0 % + 0.0005 Ω) ΔR
Vibration	MIL-STD-202, Method 204, 5 g's, 20 min, 12 cycles, 3 directions, 10 Hz to 2000 Hz	± (1.0 % + 0.0005 Ω) ΔR
Operational Life	MIL-STD-202, Method 108, 1000 h at T = 125 °C at rated power	± (2.0 % + 0.0005 Ω) ΔR
Resistance to Solder Heat	MIL-STD-202, Method 210, + 260 °C solder, 10 s to 12 s dwell, 25 mm/s emergence	± (1.0 % + 0.0005 Ω) ΔR
Moisture Resistance	MIL-STD-202, Method 106, 0 % power, 7a and 7b not required	± (2.0 % + 0.0005 Ω) ΔR

PACKAGING					
MODEL	REEL				
	TAPE WIDTH	DIAMETER	PITCH	PIECES/REEL	CODE
RCWE0402	8 mm/punched paper	180 mm/7"	2 mm	10 000	EA
RCWE0603	8 mm/punched paper	180 mm/7"	4 mm	5000	EA
RCWE0805	8 mm/punched paper	180 mm/7"	4 mm	5000	EA
RCWE1206	8 mm/punched paper	180 mm/7"	4 mm	5000	EA
RCWE1210	8 mm/punched paper	180 mm/7"	4 mm	5000	EA
RCWE2010	12 mm/embossed plastic	180 mm/7"	4 mm	4000	EA
RCWE2512	12 mm/embossed plastic	180 mm/7"	8 mm	2000	EA

**Note**

- Embossed carrier tape per EIA-481-1A



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.