

REV. 0  
 DCO 16232


COIL: @ 25°C	
RESISTANCE	194 OHMS +10% -15%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.4 VDC
MUST RELEASE	4.3 VDC MAX., .5 MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	$6 \pm 1$	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 6 MS. MAX.  
 CONTACT BOUNCE 1 MS. MAX.

CUSTOMER DATA SHEET

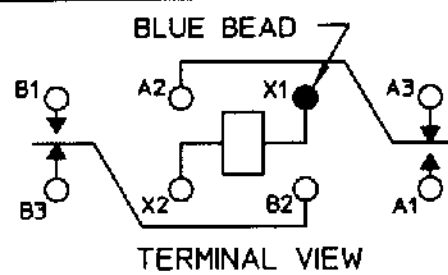

CONTACT RATING:	
	2 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS MINIMUM

DR. P8B 5-4-00 CK. 5/5/00 JAB



CUST. _____ OPL _____	"FW" RELAY
CUST. NO. M5757/10-060 REV. _____	

FW1201D02