
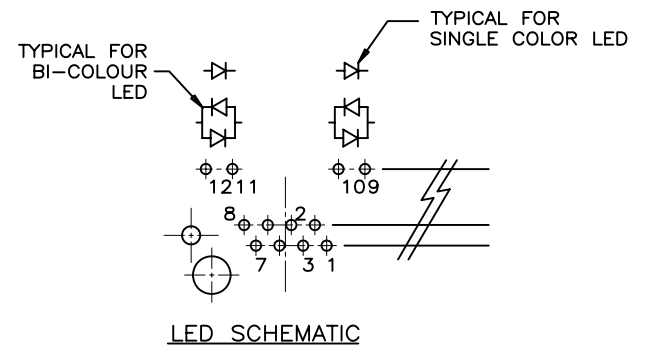
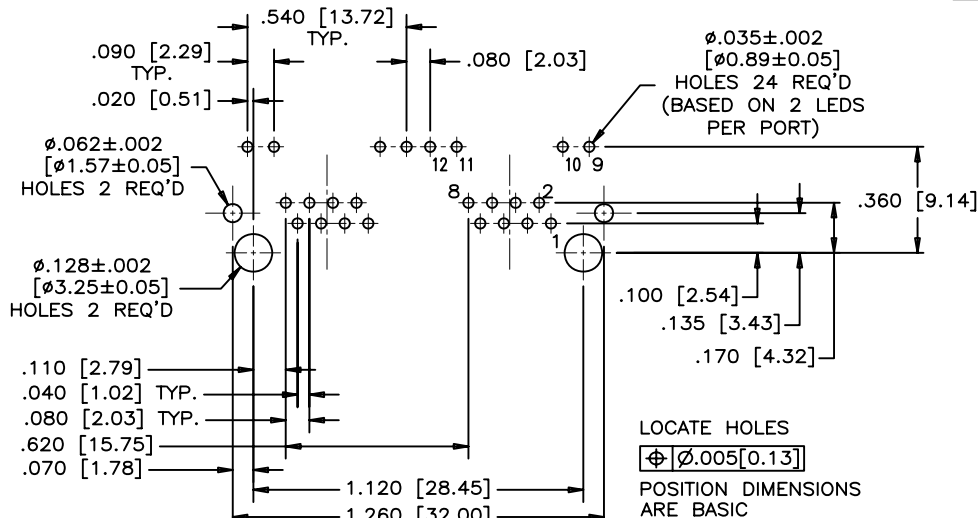


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	DEC 21/06	
B		PROPOSAL	OCT 23/08	

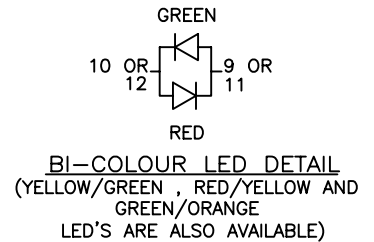

LOCATE HOLES
 $\varnothing \varnothing .005 [0.13]$
 POSITION DIMENSIONS ARE BASIC

MATERIALS:


PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
 PLATING: 50 MICRO" [1.27 MICRONS] MIN. NICKEL.
 50 MICRO" [1.27 MICRONS] MIN. GOLD ON MATING SURFACES.
 100 MICRO" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY.
 PLATING: NICKEL WITH PURE-TIN DIPPED PCB TAILS.

PART NUMBER: RJHSE-538X-A2

REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

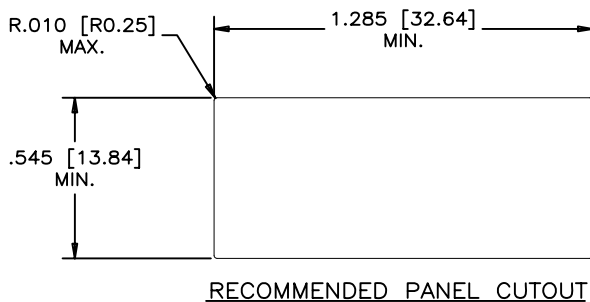

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

MATERIAL -----	DRAWN Jack W	DATE DEC 21/06	Amphenol Canada Corp.		
	DESIGNED				
	CHECKED CHIGOW	DEC 21/06			
	I. E. APPRD.				
FINISH -----	Q. A. APPRD.		TITLE 2 PORT HIGH SPEED MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED .130[3.30] CONTACT TAILS. WITH LED OPTIONS - RoHS COMPLIANT		
	DWG. APPRD.				
	ENG. REL. NO.				
	REF.				
DIMENSIONS ARE IN INCHES [mm]		CODE ID. NO. 03554	DWG C	DRAWING NO. P-RJHSE-538X-A2	REV. B
		SCALE 3/1	WT. -----	SURF. -----	SHEET 1 OF 1