

High Speed HDMI Leads

pro-SIGNAL



Specifications :

Material


Cable Assembly Type : HDMI
 Connector Type A & B : HDMI Plug
 HDMI Cable : (7/0.1BC × 1P + AM) × 4 Pcs + 7/0.1CCS × 6C
 + 7/0.12BC + AM + Black PVC Jacket
 OD : 5.5 ±0.2mm
 Marking : AWM Style 202076 +80°C 30V
 Standard HDMI Cable
 HDMI 19 Pin Male : Soldering type, Black Insulation, Gold Plated
 Contacts, Nickel Plated Shell
 All Hood : Molded Black PVC

**RoHS
Compliant**

Electrical

Conductor Resistance : 5Ω Max.
 Insulation Resistance : 10MΩ Min.
 Hi-Pot : DC200V / 1.01S
 HDTV-DVD Test : 1080P

Packaging : Bulk packaging

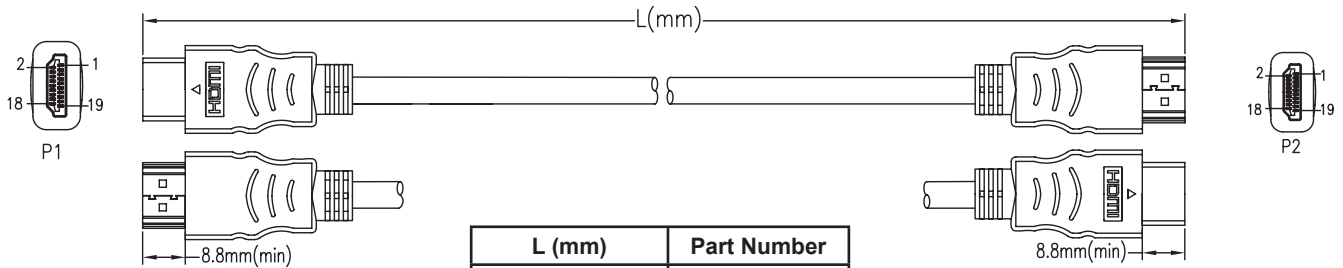

L (mm)	Part Number
500 ±30mm	RP005
1,000 ±50mm	RP006
2,000 ±50mm	RP007
5,000 ±50mm	RP008
10,000 ±70mm	RP009

PIN OUT	
P1	P2
1	1 BLUE } RED
3	3 WHITE } AM
4	4 BLUE } SILVER
6	6 WHITE } AM
7	7 BLUE } BLUE
9	9 WHITE } AM
10	10 BLUE } BROWN
12	12 WHITE } AM
13	13 GREEN
14	14 PURPLE
15	15 YELLOW
16	16 ORANGE
18	18 WHITE
19	19 RED

Part Number Table

Description	Part Number
Lead, HDMI, High Speed, 0.5m	RP005
Lead, HDMI, High Speed, 1m	RP006
Lead, HDMI, High Speed, 2m	RP007
Lead, HDMI, High Speed, 5m	RP008
Lead, HDMI, High Speed, 10m	RP009

2, 5, 8, 11, 17, SHELL DRAIN 2, 5, 8, 11, 17, SHELL

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
 www.farnell.com
 www.newark.com
 www.cpc.co.uk

pro-SIGNAL