


COIL: @ +25° C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 15 g's
SHOCK	30 g's 6 MS. DURATION
TEMPERATURE	-55 °C TO +125 °C

NOTES: OPERATE & RELEASE 5 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

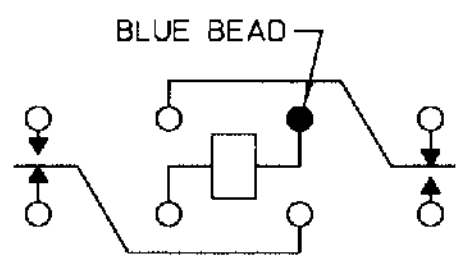

CONTACT RATING: LOW LEVEL TO 2 AMPS 100,000 OPERATIONS

DR. R.B. 10/29/96 CKP/B/10/96



CUST. C.I.I. STD.  
CUST. NO.

TYPE 'RP' RELAY

RP7631G12