







THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

MATERIAL:
 HOUSING: THERMOPLASTIC, UL94V-2.
 TERMINALS: BRASS, BRIGHT TIN PLATE.
 SCREWS: 6-32, STEEL, PLATED ZINC W/ CLEAR CHROMATE COATING. UNLESS OTHERWISE SPECIFIED.
















ELECTRICAL:
 MAXIMUM CURRENT: 20A.
 OPERATING VOLTAGE: 300V.
 WIRE RANGE: 12-22 AWG.


ENVIRONMENTAL:
 OPERATING TEMP.: -60°C TO 105°C

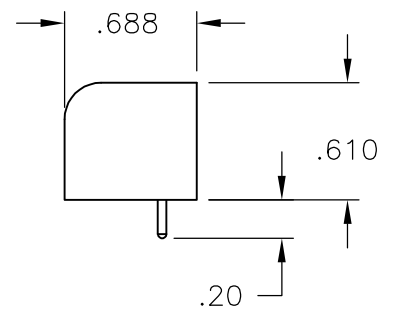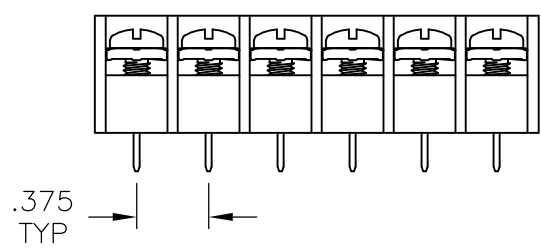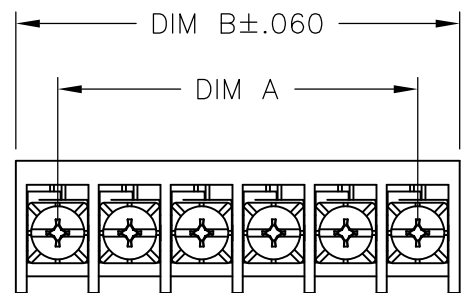-  WHITE MARKING AS SHOWN.
-  SCREWS BOTTOMED.
-  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		A3	REVISED PER ECO-11-012226	15JUN11	HMR	CR

	DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER
 OBSOLETE	7.561	7.125	20	RSB6VP201202	2-1437408-6
	7.186	6.750	19	RSB6VP191202	2-1437408-4
	6.811	6.375	18	RSB6VP181202	2-1437408-1
	6.061	5.625	16	RSB6VP16120222N1760	2-1437417-5
	6.061	5.625	16	RSB6VP16120222N60	1-1437408-9
	6.061	5.625	16	RSB6VP16120221N2060	1-796609-6
	6.061	5.625	16	RSB6VP1620221N60	1-1437408-7
	6.061	5.625	16	RSB6VP161202	1-1437408-6
 OBSOLETE	5.311	4.875	14	RSB6VP141202	1-1437408-2
	4.936	4.500	13	RSB6VP131202	1-1437408-0
	4.561	4.125	12	RSB6VP121202	1437408-8
 OBSOLETE	4.186	3.750	11	RSB6VP111202	1437408-7
	3.811	3.375	10	RSB6VP101202	1437408-1
	3.436	3.000	9	RSB6VP09120222N60	9-1437407-6
	3.436	3.000	9	RSB6VP09120221N60	9-1437407-5
	3.436	3.000	9	RSB6VP091202	9-1437407-4
 OBSOLETE	3.061	2.625	8	RSB6VP081202	8-1437407-8
	2.686	2.250	7	RSB6VP071902	8-1437407-7
	2.686	2.250	7	RSB6VP071202	8-1437407-6
	2.311	1.875	6	RSB6VP061202	7-1437407-9
	1.936	1.500	5	RSB6VP05120221AA	796933-1
 OBSOLETE	1.936	1.500	5	RSB6VP051202	7-1437407-4
	1.561	1.125	4	RSB6VP041202	7-1437407-0
	1.186	.750	3	RSB6VP03120211	1986391-3
	1.186	.750	3	RSB6VP031202	6-1437407-3
	.811	.375	2	RSB6VP08120222N1960	5-1437407-9
	.811	.375	2	RSB6VP021202N60	6-1437407-0
	.811	.375	2	RSB6VP021202	5-1437407-8


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S SCHLEGEL	02OCT2008	 OB SOLETE TE Connectivity NOT the LATEST REVISION		
DIMENSIONS: INCHES		CHK	S MACE	10/2/08			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S MACE	10/2/08			
0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .010 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC		NAME			
MATERIAL		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		WEIGHT		A3	00779	C-5-1437407-8	-
CUSTOMER DRAWING				SCALE	1:1	SHEET	1 OF 2
				REV	A3		

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-




5-1437407-9

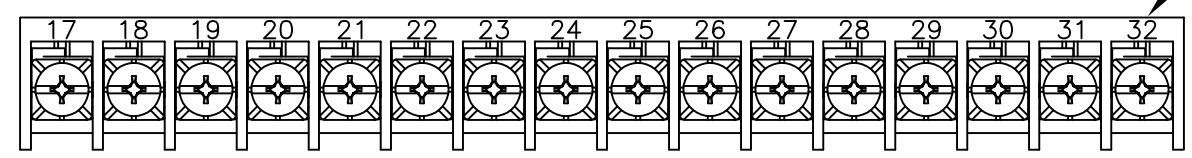


1-796609-6




1986391-3

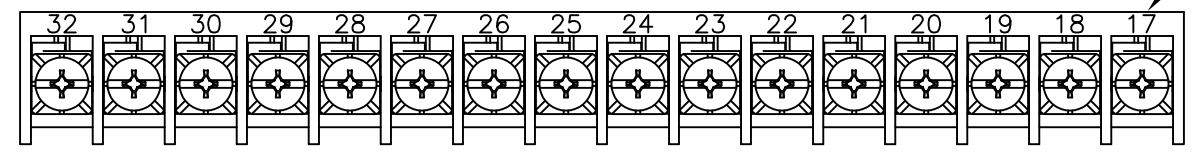


2-1437417-5

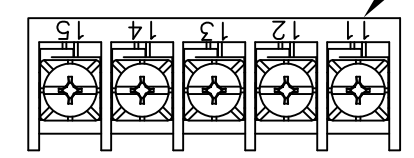


796933-1

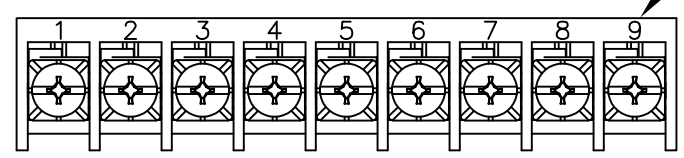


9-1437407-5

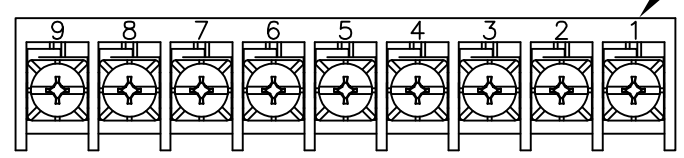

9-1437407-6

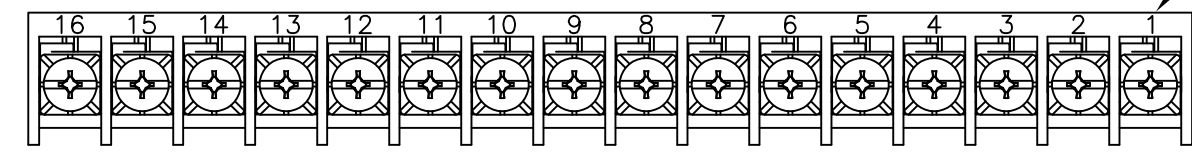

1-1437408-9

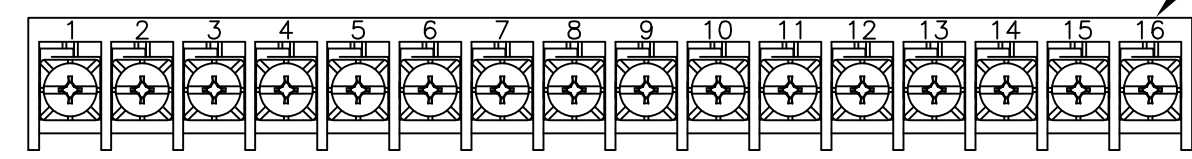

1-1437408-7

 OBSOLETE	9.061	8.625	24	RSB6VP241202	3-1437408-2
	8.686	8.250	23	RSB6VP231202	3-1437408-1
	8.311	7.875	22	RSB6VP221202	2-1437408-8
	7.936	7.500	21	RSB6VP211202	2-1437408-7
DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 02OCT2008
DIMENSIONS: INCHES		CHK S MACE 10/2/08
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S MACE 10/2/08
0 PLC	± -	PRODUCT SPEC APPLICATION SPEC WEIGHT -
1 PLC	± -	
2 PLC	± .02	
3 PLC	± .010	
4 PLC	± -	
ANGLES	± 2'	FINISH -
MATERIAL -		

TE Connectivity			
RSB6 ASSEMBLY			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-5-1437407-8	-
CUSTOMER DRAWING		SCALE 1:1	SHEET 2 OF 2 REV A3