



Standards - Board Level Heatsinks - Heat Sinks for IC Packages - Board Level BGA

Omnidirectional Pin Fin Heat Sink for 21 mm BGAs


The omnidirectional pin fin heat sink is available in four standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC package.

[For adhesive tape options, click here.](#)

- Aluminum, Black Anodized



Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (In.)
RT5025B00000	21 (.827)	6.4 (.250)
RT5035B00000	21 (.827)	8.9 (.350)
RT5045B00000	21 (.827)	11.4 (.450)
RT5060B00000	21 (.827)	15.2 (.600)

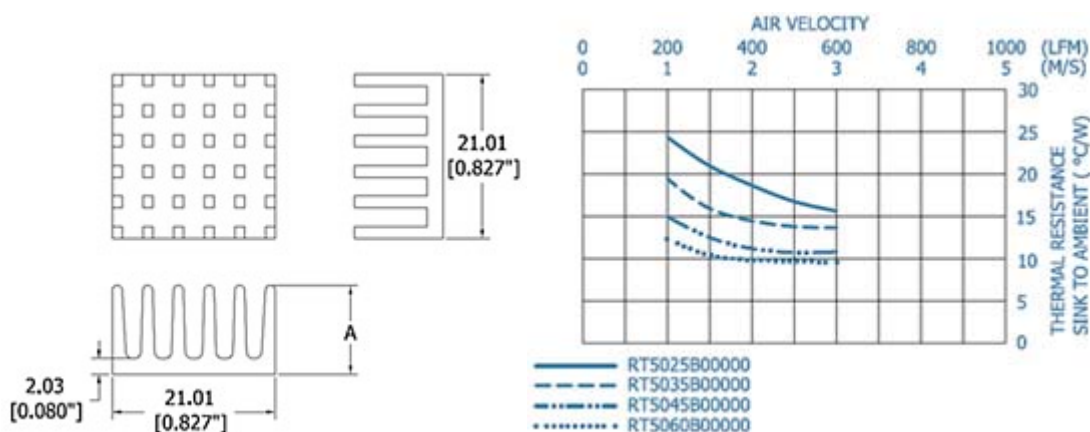

[Return to Top](#)


Omnidirectional Pin Fin Heat Sink for 25 mm BGAs

The omnidirectional pin fin heat sink is available in four standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC package. [For adhesive tape options, click here.](#)

- Aluminum, Black Anodized



Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (In.)
RT5125B00000	25 (.984)	6.4 (.250)
RT5135B00000	25 (.984)	8.9 (.350)
RT5145B00000	25 (.984)	11.4 (.450)
RT5160B00000	25 (.984)	15.2 (.600)

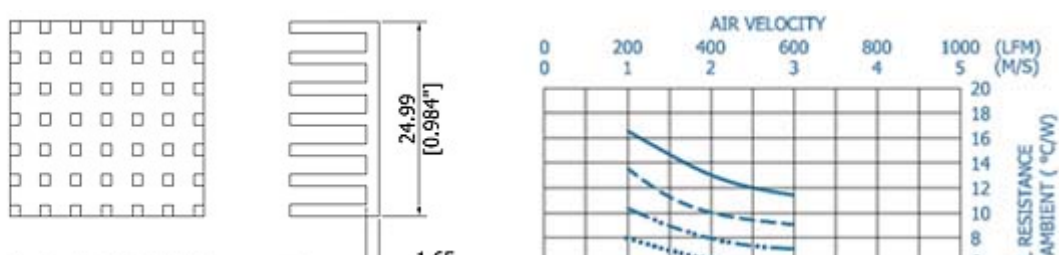

[Return to Top](#)


Omnidirectional Pin Fin Heat Sink for 28 mm BGAs

The omnidirectional pin fin heat sink is available in four standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC package. [For adhesive tape options, click here.](#)

- Aluminum, Black Anodized



Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (in.)
RT5625B00000	21 (.827)	6.4 (.250)
RT5635B00000	21 (.827)	8.9 (.350)
RT5645B00000	21 (.827)	11.4 (.450)
RT5660B00000	21 (.827)	15.2 (.600)

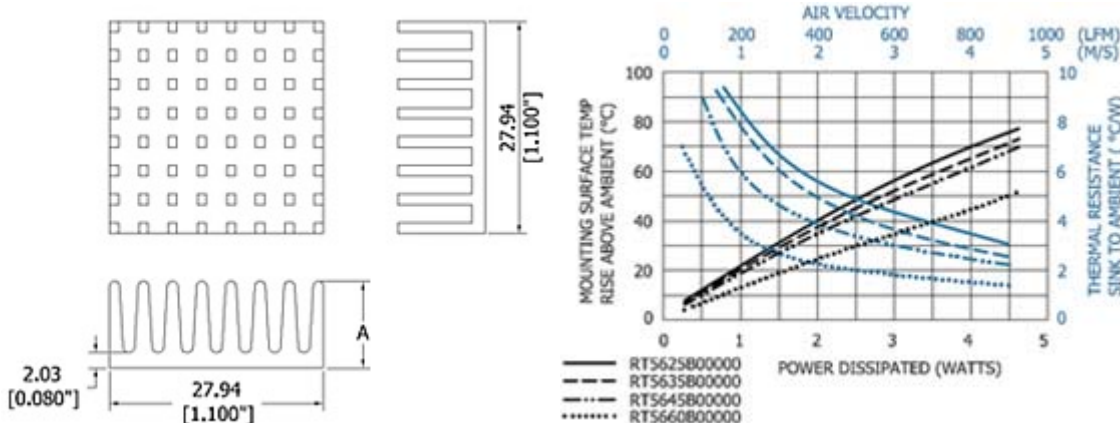

[Return to Top](#)


Omnidirectional Pin Fin Heat Sink for 35 mm BGAs

The omnidirectional pin fin heat sink is available in four standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC package. [For adhesive tape options, click here.](#)

- Aluminum, Black Anodized



Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (in.)
RT5325B00000	35 (1.378)	6.4 (.250)
RT5335B00000	35 (1.378)	8.9 (.350)
RT5345B00000	35 (1.378)	11.4 (.450)
RT5360B00000	35 (1.378)	15.2 (.600)

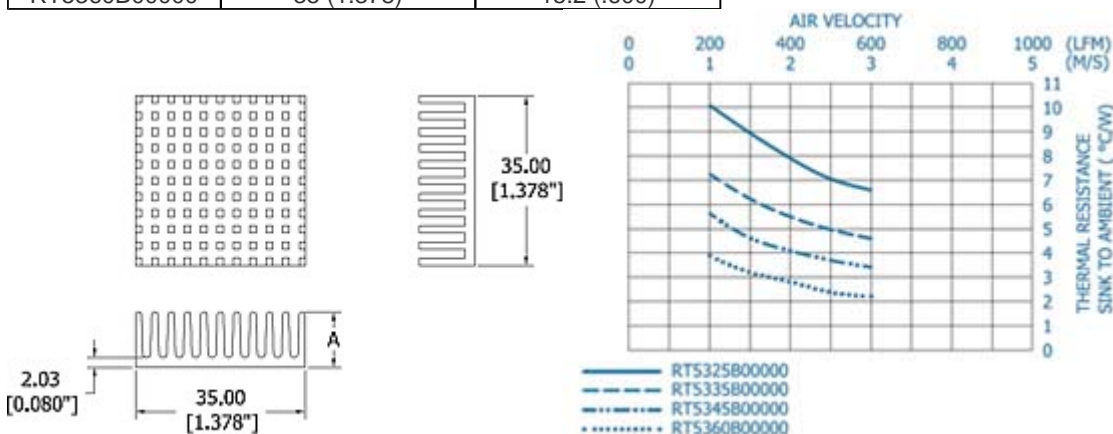


[Return to Top](#)

Omnidirectional Pin Fin Heat Sink for 40 mm BGAs

The omnidirectional pin fin heat sink is available in four standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC package. [For adhesive tape options, click here.](#)
 - Aluminum, Black Anodized



Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (in.)
RT5526B00000	40.6 (1.600)	6.6 (.260)
RT5553B00000	40.6 (1.600)	13.3 (.525)

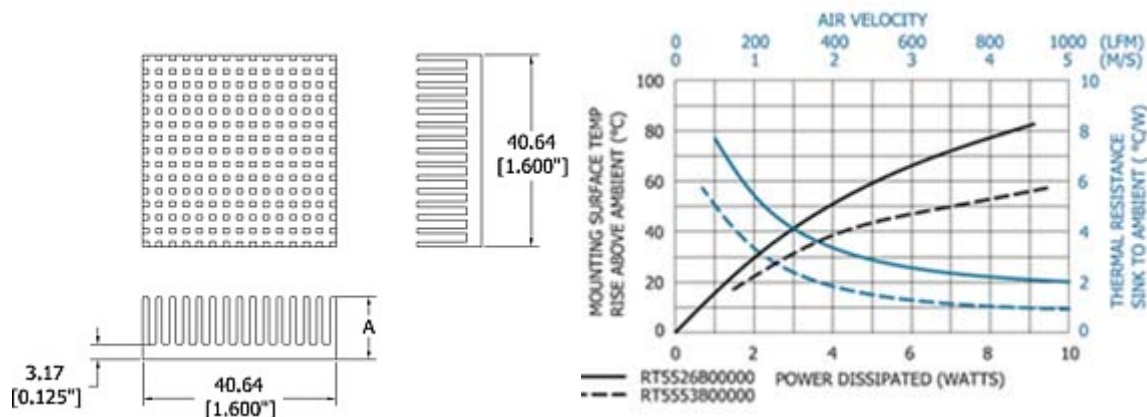


[Return to Top](#)

Omnidirectional Pin Fin Heat Sink for 45 mm BGAs

The omnidirectional pin fin heat sink is available in three standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC package. [For adhesive tape options, click here.](#)
 - Aluminum, Black Anodized



Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (in.)
RT5235B00000	44.5 (1.750) X 43.2 (1.700)	8.9 (.350)
RT5240B00000	44.5 (1.750) X 43.2 (1.700)	10.2 (.400)
RT5265B00000	44.5 (1.750) X 43.2 (1.700)	16.5 (.650)

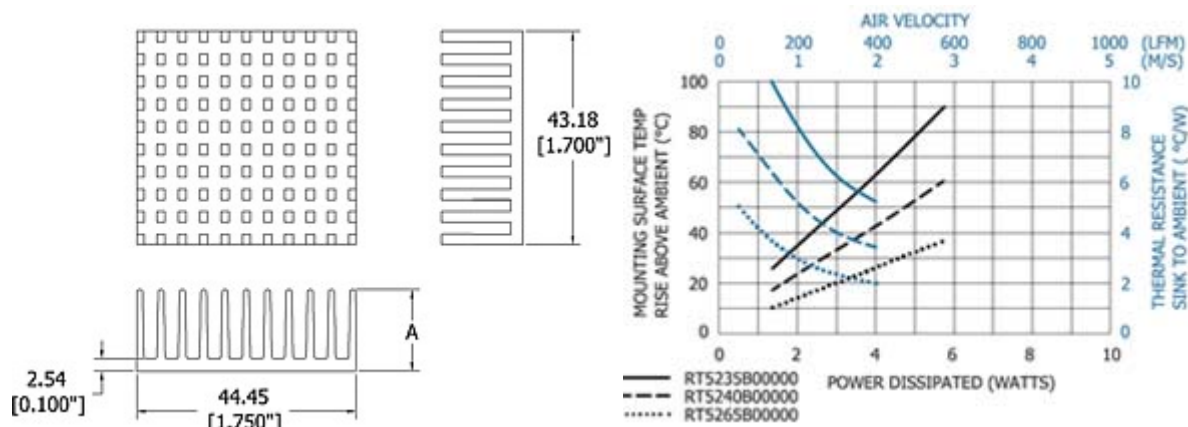

[Return to Top](#)

Unidirectional Fin Heat Sink for 35 mm BGAs


The unidirectional pin fin heat sink is available in four standard heights. Add pressure sensitive adhesive tape for easy and reliable attachment to IC



package. [For adhesive tape options, click here.](#)

- Aluminum, Black Anodized

Part Number	Base Dimensions mm (in.) Sq.	Height "A" mm (in.)
RT5425B00000	35 (1.378)	6.4 (.250)
RT5435B00000	35 (1.378)	8.9 (.350)
RT5445B00000	35 (1.378)	11.4 (.450)
RT5460B00000	35 (1.378)	15.2 (.600)

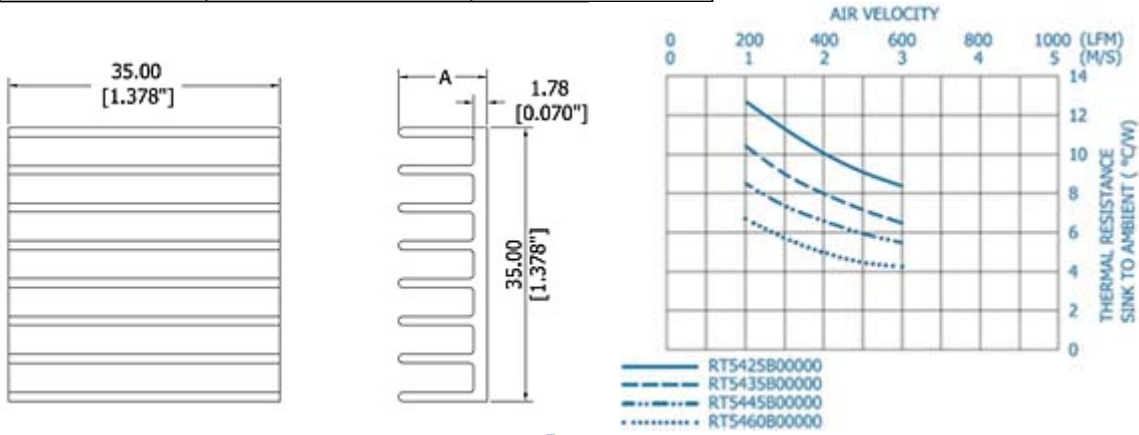

[Return to](#)

[Top](#)

Copyright 2006 R-Theta. All Rights Reserved.