


HEAT SHRINK TUBING

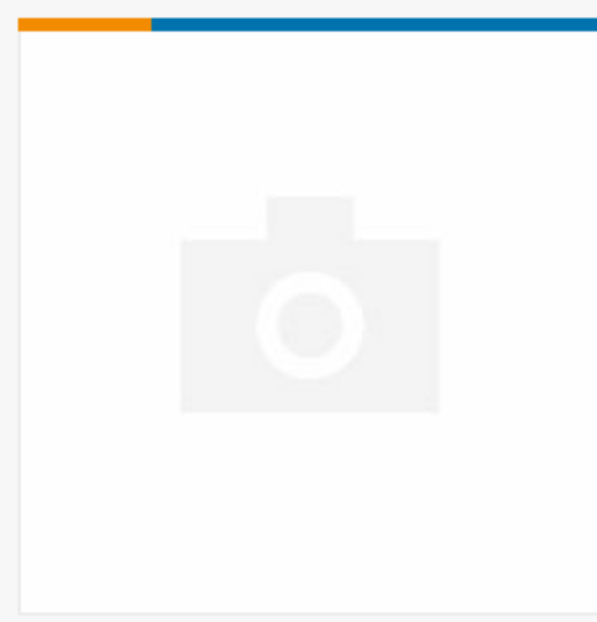

✓ Active

> [See All Documentation](#)

TE CONNECTIVITY RT-780-1/2-0-SP

RT-780-1/2-0-SP
 TE Internal Number: C21127-000
 Alias ID: 1202151-8

Always EU RoHS/ELV Compliant

Wall Type **Single**

Resistant To **Fluids, Hydrocarbons, Radiation, Strain**

Low Outgassing **No**

Product Source **US**

Packaging Method **Piece**

> [See All Features](#)

North America ▼

DISTRIBUTOR	QUANTITY	DATE AS OF	
MASTER ELECTRONICS CORP. 1-888-473-5297	900	2015/09/04	>
ONLINE COMPONENTS 1-888-473-5297	300	2015/09/03	>

GET SAMPLE	
SAVE TO LIST	
CHECK FOR TOOLING	
FIND SIMILAR PRODUCTS	

DOCUMENTATION FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features	Wall Type	Single
Body Features	Material Systems Code	780 NBC
	Shrink Ratio	2:1
	Color	Black
	Flexibility	Semi-Rigid
	Material	Crosslinked Fluoroelastomer
	Fluid Type	Aviation Fuel, Brake Fluid, Chemicals/Solvents, De-Icing Fluid, Diesel Fuel, Hydraulic Fluid, Lubricating Oil, Military Decontaminating Agents, Water
Dimensions	Recovered Wall Thickness (Nominal)	.003mm[.08in]
	Expanded Inside Diameter (Min)	12.7mm[.5in]
Usage Conditions	Resistant To	Fluids, Hydrocarbons, Radiation, Strain
	Recovery Temperature(°C)	200
	Operating Temperature Range(°C)	-55 – 175
	Flammability	Flame-Retardant
	Fluid Resistance	Immersion Protection, Splash Protection
	Shrink Temperature (Min)(°C)	175
Product Availability	Applicable Region	Worldwide
Packaging Features	Packaging Method	Piece
Other	Low Outgassing	No
	Product Source	US
Product Compliance	Statement of Compliance PDF VIEW ALL PRODUCT COMPLIANCE	

COMPATIBLE

No compatible products found for RT-780-1/2-0-SP