

# Customer Information Sheet

DRAWING No.: S25-XX6

SHEET 2 OF 2


IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

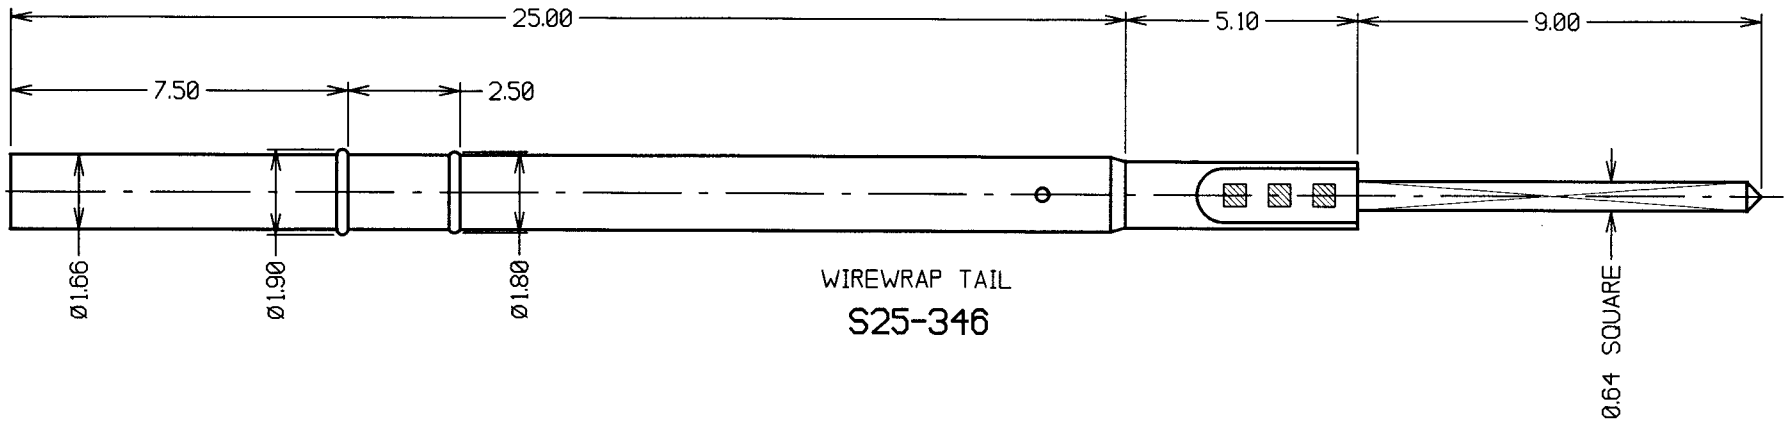

WIREWRAP TAIL  
S25-346

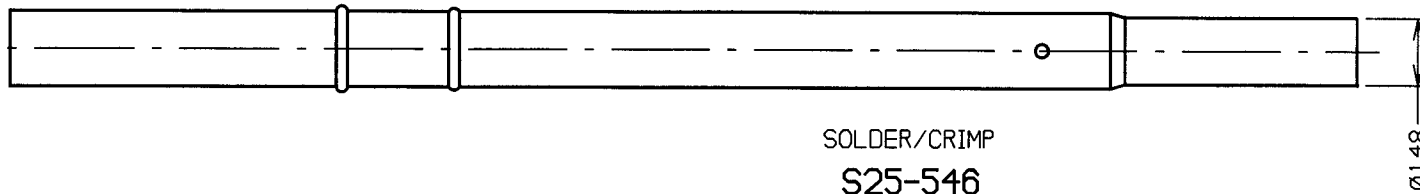

SOLDER/CRIMP  
S25-546

**NOTES:**

1. TO BE USED WITH PROBES P25-XX26.
2. SUITABLE FOR A MINIMUM DISTANCE BETWEEN CENTRES OF 2.54mm.
3. SPECIFICATIONS FOR PROBE PERFORMANCE ARE GIVEN ON THE PROBE DRAWING.
4. RECOMMENDED HOLE SIZES:  
ACRYLIC = Ø1.70mm.  
BAKELITE = Ø1.75mm.  
FIBRE REINFORCED PLASTIC = Ø1.75mm.

2	07.03.01	5730
ISS.	DATE	C/NOTE
APPROVED: <i>[Signature]</i>		
CHECKED: <i>[Signature]</i>		
DRAWN: W. J. BOURNE		
CUSTOMER REF.:		
ASSEMBLY ORG.:		

ORDER CODE:  
**S25-XX6**  
SPRING PROBE  
SLEEVE (SEE ABOVE)



THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES  
X. - ±1mm  
X.X - ±0.25mm  
X.XX - ±0.10mm  
X.XXX - ±0.01mm  
ANGLES - ±1°  
UNLESS STATED

MATERIAL:  
PHOSPHOR BRONZE  
FINISH: GOLD  
S/AREA: mm<sup>2</sup>

TITLE:  
2.54mm MIN. CENTRE TWO-PIECE  
SPRING PROBE SLEEVE  
DRAWING NUMBER:  
**S25-XX6**  
SHT 2 OF 2

HARWIN INC  
U.S.A.  
TEL: (812) 285 0055  
FAX: (812) 285 0056

HARWIN PLC  
U.K.  
TEL: 023 9237 0451  
FAX: 023 9231 4590

HARWIN PTE  
SINGAPORE  
TEL: 65 7794909  
FAX: 65 7793868