

Socket strip - SFLY 2,5/F32/ZD - 2285470

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Screw socket, Nominal current: 4 A, Number of positions: 32, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Contact surface: Gold

The illustration shows the version SFLY 2,5/F 32/ZB



Key Commercial Data

Packing unit	10 STK
GTIN	

Technical data

Dimensions

Length	40 mm
Height	35.5 mm
Width	95 mm
Pitch	5.08 mm
Hole diameter	2.8 mm

General

Range of articles	SFLY 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V
Nominal cross section	2.5 mm ²
Insulating material	PA
Flammability rating according to UL 94	V2
Stripping length	8 mm
Screw thread	M3

Socket strip - SFLY 2,5/F32/ZD - 2285470

Technical data

General

Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	32

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V2

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440490
eCl@ss 8.0	27440490

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Socket strip - SFLY 2,5/F32/ZD - 2285470

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC


Drawings

Socket strip - SFLY 2,5/F32/ZD - 2285470

Dimensional drawing

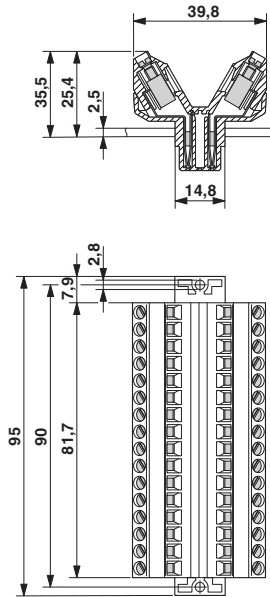

Dimensional drawing

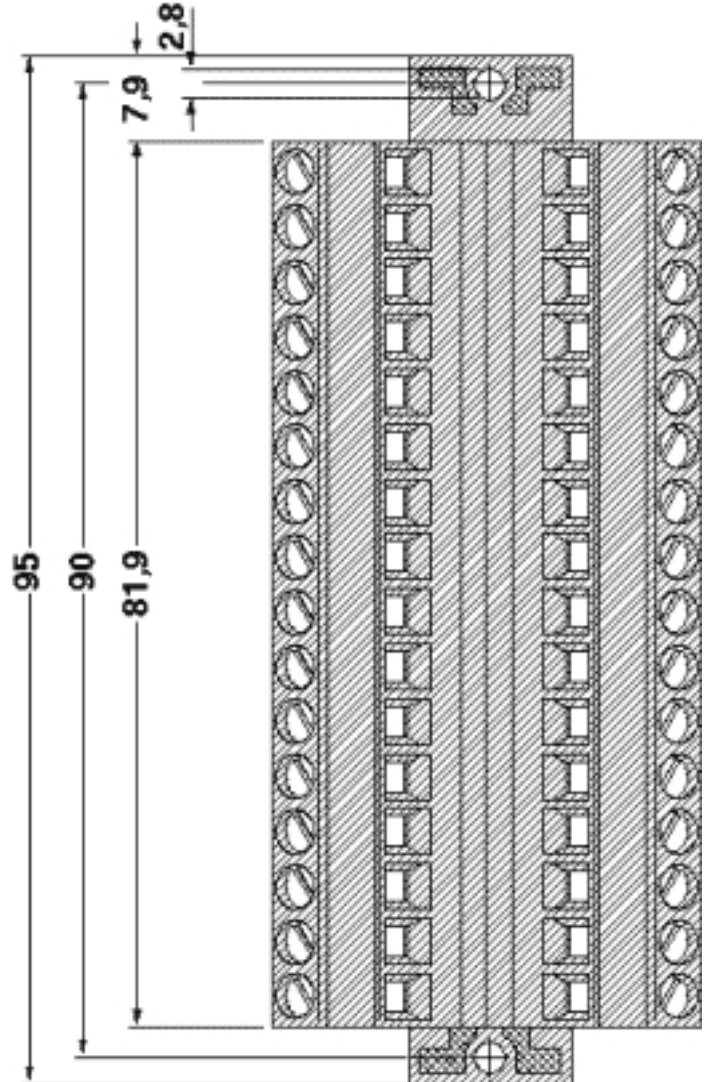

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>