

swissbit®

Product Fact Sheet


Industrial M.2 2242 SATA SSD

X-86m2 Series

SATA Gen3 – 6.0 Gbit/s, 3D pSLC

Commercial and Industrial
Temperature Grade

Date: July 2, 2020
Revision: 1.00

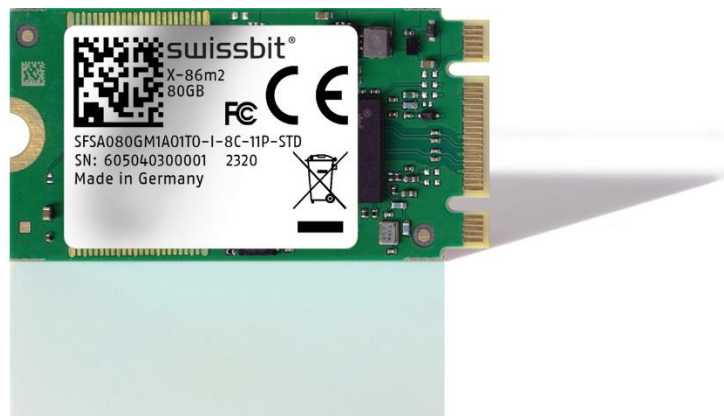

 Made in Germany

Product Summary

- **Capacities:** 10 GBytes, 20 GBytes, 40 GBytes, 80 GBytes, 160 GBytes (3D pSLC)
- **Form Factor:** m.2 2242 type (42 mm x 22 mm x 3.58 mm) acc. PCI-SIG
- **Interface:** SATA Gen3 – 6 Gbit/s (Gen2 – 3 Gbit/s and Gen1 – 1.5 Gbit/s backward compatible)
- **Command Sets:** Supports ATA/ATAPI-8 and ACS-4
- **Performance:** Burst Transfer Rate: Up to 600 MBytes/s in SATA Gen3 – 6.0 Gbit/s
 - Read Performance: Sequential Read up to 360 MBytes/s, Random Read 4K up to 15,000 IOPS
 - Write Performance: Sequential Write up to 224 MBytes/s, Random Write 4K up to 9,000 IOPS
- **Operating Temperature Range:** Commercial: 0 °C to 70 °C / Industrial: -40°C to 85 °C
- **Storage Temperature Range:** -40 °C to 85 °C
- **Operating Voltage:** 3.3 V ± 5%
- **Power (Max):** ≤1386 mW / ≤ 400 mA
- **Data Retention:** 10 Years @ Life Begin / 1 Year @ Life End
- **Endurance in DriveWritesPerDay (DWPD¹):** JEDEC Enterprise Workload: Typical 3.1 (depends on drive config.)
- **Shock/Vibration:** 1,500 g / 50 g
- **High-Performance 32-Bit Processor with Integrated, Parallel Flash Interface Engines:**
 - Triple-Level Cell (TLC) 3D NAND Flash in pSLC mode
 - Flexible BCH and GCC ECC engines provide superior error correction performance
- **High Reliability:** Mean Time Between Failure (MTBF): > 2,000,000 hours @ 25°C
- **Data Reliability:** < 1 non-recoverable error per 10¹⁶ bits read

Product Features

- Dynamic and Static Wear Leveling
- Subpage Mode Flash Translation Layer (FTL)
- Active Data Care Management: Adaptive Read Refresh
- Lifetime Enhancements: Dynamic Bad Block Remapping / Write Amplification Reduction
- On-Board Power Fail Protection
- TRIM and NCQ Support
- ATA Security Feature Set Support
- DEVSLP Compatible
- Enterprise-Grade Self-Monitoring, Analysis, and Reporting Technology (S.M.A.R.T.)
- 30 µinch Gold-Plated Connector (IPC-6012B Class 2 Compliant)
- End-to-End (E2E) Data Protection
- Advanced protection against radiation and soft-errors with SRAM ECC and low-alpha package
- AES-128 and AES-256 Encryption support with CBC and XTS modes (on request)
- TCG Opal 2.0 Compliant and Secure-Boot features (on request)
- On-die temperature sensor
- Life Cycle Management, Controlled "Locked" BOM
- RoHS-6 Compliant
- In-Field Firmware Update², Swissbit Life Time Monitoring (SBLTM) Tool and SDK

Why Swissbit?

Swissbit is focused on the design, development, manufacture, and support of leading edge memory and storage solutions for the worldwide OEM/ODM marketplace. As a global supplier, Swissbit recognizes and addresses the higher level of application requirements of today's industrial, Netcom, and automotive customers by providing best-in-class products and services, with uncompromised attention to driving overall value and quality.

¹ DWPD for 3 years limited lifetime warranty

² The support of In-Field FW update capabilities on host systems is recommended.