


REV.0
DCO 143317

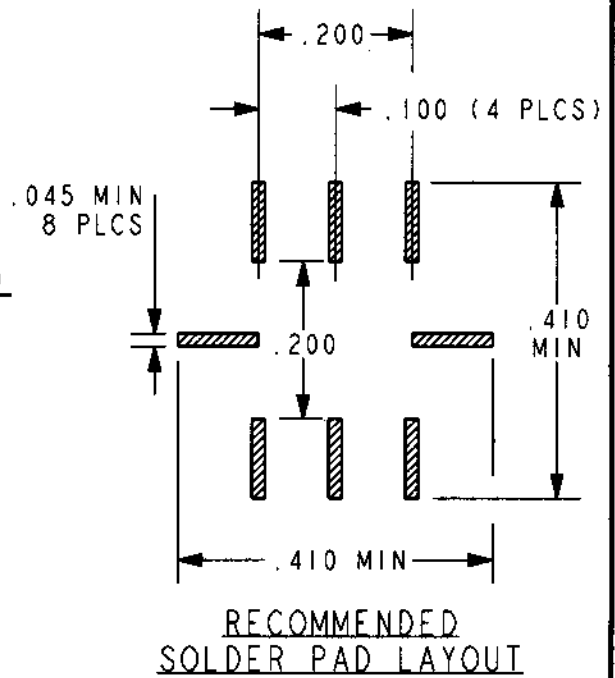


COIL: @ 25°C
 RESISTANCE _____ 400 OHMS ±10%
 NOMINAL VOLTAGE _____ 12.0 VDC
 MUST OPERATE _____ 9.0 VDC

 MUST RELEASE _____

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 500 _____ CPS @ _____ 10 _____ g's
 SHOCK _____ 30 _____ g's _____ 6±1 _____ MS. DURATION
 TEMPERATURE _____ -55 _____ °C TO _____ +85 _____ °C
 NOTES: _____ OPERATE TIME 4.0 MS MAX.
 _____ RELEASE TIME 6.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO
 _____ 1 AMP 28 VDC RESISTIVE 100,000 OPERATIONS

DR. _____ ASB 11/19/01 | CK. TLG 11-20-01

CII Technologies™
 advanced control electronic solutions

CUST. _____ CII
 CUST. NO. _____ STANDARD REV. _____

"SMGAD" RELAY

SHCD-12