


Plug-in card block - SKBI 64/F48 - 2264093

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in card block, Nominal current: 4 A, Number of positions: 48, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Color: green



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 053918

Technical data

Dimensions

Length	66 mm
Height	162 mm
Width	118 mm
Pitch	5.08 mm
Dimension a	238.76 mm
Hole diameter	4.2 mm

General

Range of articles	SKBI 64
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V (in acc. with DIN VDE 0110/Gr.B)
Nominal cross section	2.5 mm ²
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	48

Connection data

Plug-in card block - SKBI 64/F48 - 2264093

Technical data

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260710
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002642
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

EAC

Ex Approvals

Plug-in card block - SKBI 64/F48 - 2264093

Approvals


Approvals submitted

Approval details


EAC

Drawings

Dimensional drawing

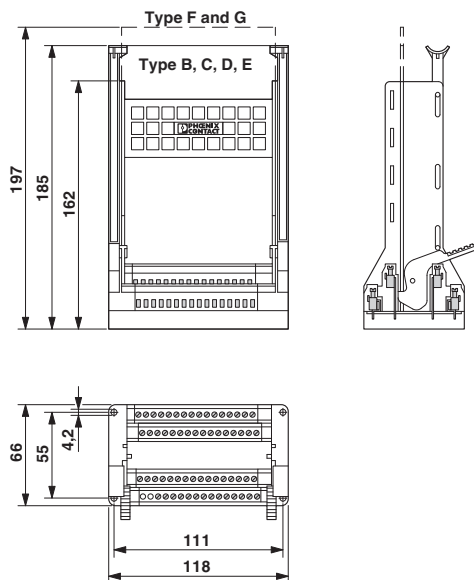

Schematic diagram

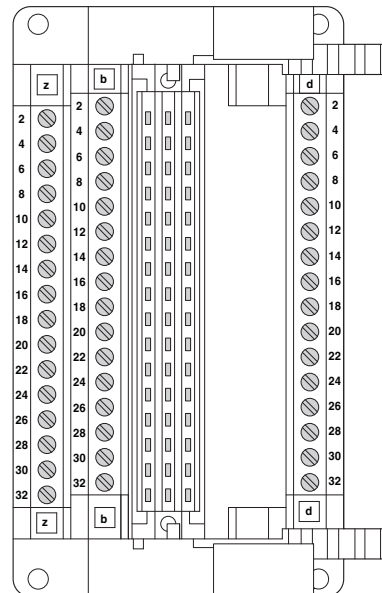

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>