

- Cable Ties
- Cable Ties with Fasteners
- Cable Tie Tools
- Clamps and Clips
- Mounts
- Heavy Duty Mounts
- Wiring Duct
  - Solid Wall
  - Slotted Wall
  - High Density Slotted Wall**
- Covers
- Accessories
- Wiring Protection
- Labels, Printers and Software
- Pre - Terminated Networking
- Copper Network Solutions
- Fiber Network Solutions
- Jacks and Wall Plates
- Residential Solutions
- Racks - Cable Management
- Surface Raceway Systems

# SLHD1X1W4

High Density Slotted Duct 1" X 1" Non-Adhesive, PVC, White, 120' / carton

Article Number: 184 - 11006  
 Part Number: SLHD1X1W4  
 Type: SLHD1X1  
 Material: PVC




- [Find a Distributor](#)
- [Order Samples](#)
- [Get Technical Drawings](#)

## 1. Base Data

<b>Part No.</b>	SLHD1X1W4
<b>Type</b>	SLHD1X1
<b>Color</b>	White
<b>Features</b>	High density slotted wall duct comes with narrow fingers, equaling a 2-to-1 finger ratio compared to standard slotted wiring duct. <b>Narrow fingers reduce fanning of the wires to the terminal blocks.</b> Compact designs and components are more easily accommodated with the high density duct's 2-to-1 finger ratio. <b>High density duct also incorporates the double scored design, similar to the standard slotted wall duct.</b> With sizes 2 inches high and above, high density duct features a double restriction on each finger of the duct. The double restriction helps retain wires in the bottom portion of the duct for easier installation. <b>Mounting holes are uniform in size to the solid and slotted wall duct, but are offered every 2 inches to accommodate compact designs and installations.</b>

## 2. Product Dimensions

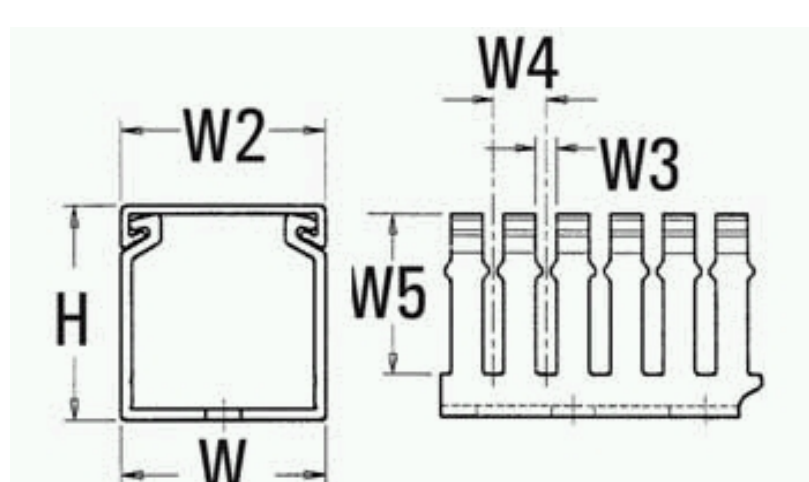

<b>Length (L)</b>	6 ft / 1.83 m
<b>Width (W)</b>	1.00 " / 25.4
<b>Width (W2)</b>	1.00 " / 25.4 mm
<b>Width (W3)</b>	4.1 mm
<b>Width (W4)</b>	.40 " / 10.2 mm
<b>Width (W5)</b>	.75 " / 19.1 mm
<b>Height (H)</b>	1.05 " / 26.7 mm
<b>Mounting Hole Centers</b>	2.00 " / 50.80 mm

## 4. Material and Specifications

<b>Material</b>	Polyvinylchloride (PVC)
<b>Material Shortcut</b>	PVC
<b>Certification</b>	CSA / UL
<b>CSA Certified</b>	Yes
<b>Flammability</b>	self-extinguishing
<b>Material Specification</b>	RoHS
<b>Operating Temperature</b>	+122 Â°F (+50 Â°C)

## Logistic and Packaging

<b>Packaging Type</b>	carton
<b>Pkg. Qty.</b>	120 ft / 36.6 m
<b>Carton Qty.</b>	120
<b>UPC</b>	08930611331

## Miscellaneous

<b>UL Recognized (US and Canada)</b>	Yes
<b>Width (W3)</b>	.16 "

- [Find a Distributor](#)

[Get Product Samples](#)

[Get Technical Drawings](#)

### Customers Who Bought This Item Also Bought

- 

Wiring Duct Cover Width 1.00" PVC, White, 120' / Pkg. Qty.  
 Part No: **TC1W4**  
 Article No: 181 - 91008
- 

Cable Tie, 18lb., 3.27", Max. Bun. Dia .87" PA66, Natural, 1000/pk  
 Part No: **T18R9M4**  
 Article No: 111 - 01872
- 

High Density Slotted Duct 1" X 3" Non-Adhesive, PVC, White, 120' / carton  
 Part No: **SLHD1X3W4**  
 Article No: 184 - 13007
- 

Cable Tie, 50 lb. 7.9" Max. Bun. Dia. 1.97", PA66, Black, 1000/pk  
 Part No: **T50R0M4**  
 Article No: 111 - 04846
- 

High Density Slotted Duct 2" X 2" Non-Adhesive, PVC, White, 120' / carton  
 Part No: **SLHD2X2W4**  
 Article No: 184 - 22008

This product was found in [Wiring Duct](#) > [High Density Slotted Wall](#)