SPC TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1878	A	RELEASED	EO	06/05/06	TL	06/19/06	HO	06/19/06

RoHS Compliant

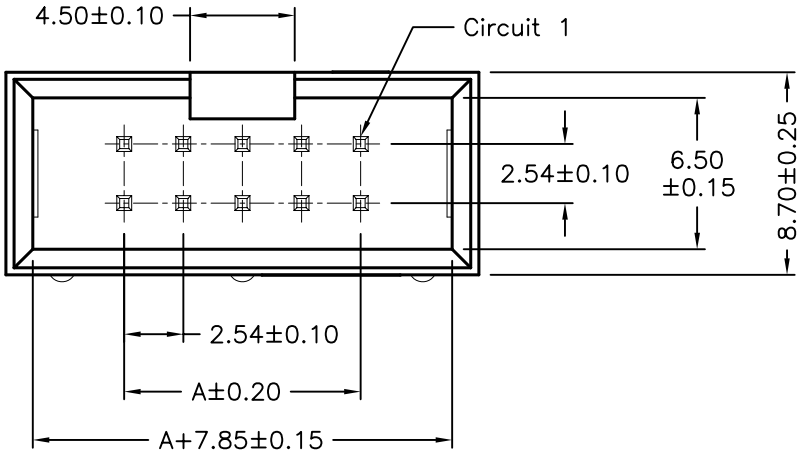

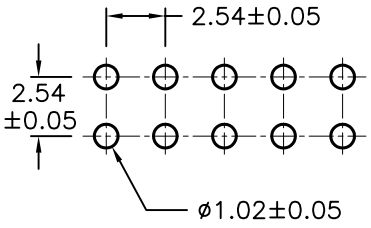

P.C.B LAYOUT

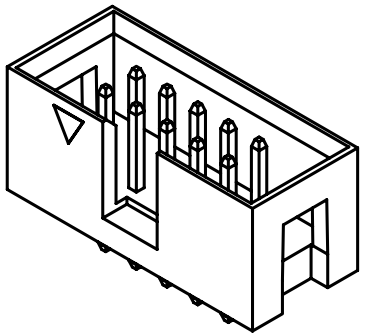

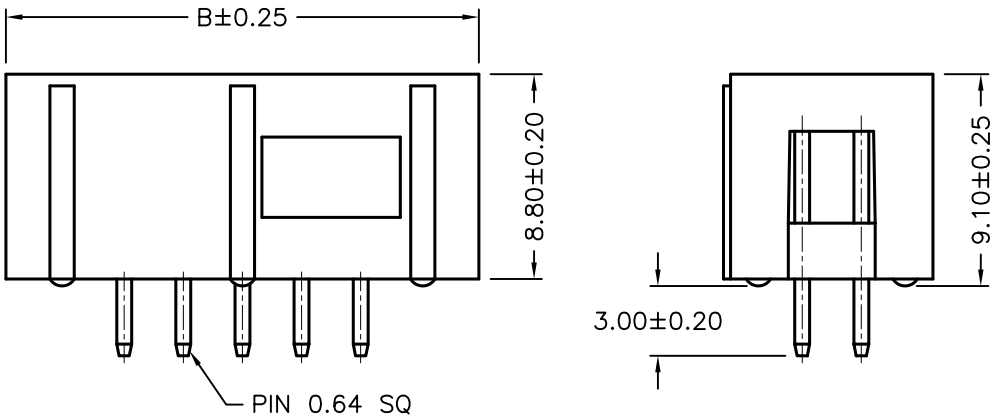

SPECIFICATIONS

- Current Rating: 3A AC, DC
- Voltage Rating: 250V AC, DC
- Temperature Range: −25°C ~ +85°C
- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1500 VAC/minute
- Pin Material: Brass/Gold−flash
- Material: PBT15%GF, UL94V−0
- Color: Black

SPC Type #	Number of positions	Dimensions	
		A	B
SPC20505	10	10.16	20.32
SPC20506	14	15.24	25.40
SPC20507	16	17.78	27.94
SPC20508	20	22.86	33.02
SPC20509	26	30.48	40.64
SPC20510	34	40.64	50.80
SPC20511	40	48.26	58.42

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

X.X±0.25
X.XX±0.15
X.XXX±0.05

DRAWN BY:	DATE:
EKLAS ODISH	06/05/06
CHECKED BY:	DATE:
THOMAS LEE	06/19/06
APPROVED BY:	DATE:
HISHAM ODISH	06/19/06

DRAWING TITLE: PCB Box Header, 0.100 Inch Spacing, Straight, Double Row

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA−769	TA−769.DWG	A

SCALE: NTS | U.O.M.: mm | SHEET: 1 OF 1