


# Economical, High-Temperature Surface Probe



## SPHT Series

- ✓ Ceramic Tip with Spring-Loaded Contacts Rated to 650°C (1200°F)
- ✓ J, K, or E Surface Probes Available
- ✓ 150 mm (6") and 300 mm (12") Long Surface Probes Available
- ✓ Molded Utility Handle Rated to 220°C (428°F)
- ✓ Retractable Cable Expands to 1.5 m (5')
- ✓ Subminiature Connector for Use with Handheld Thermometers
- ✓ 304 SS OMEGACLAD® Sheath

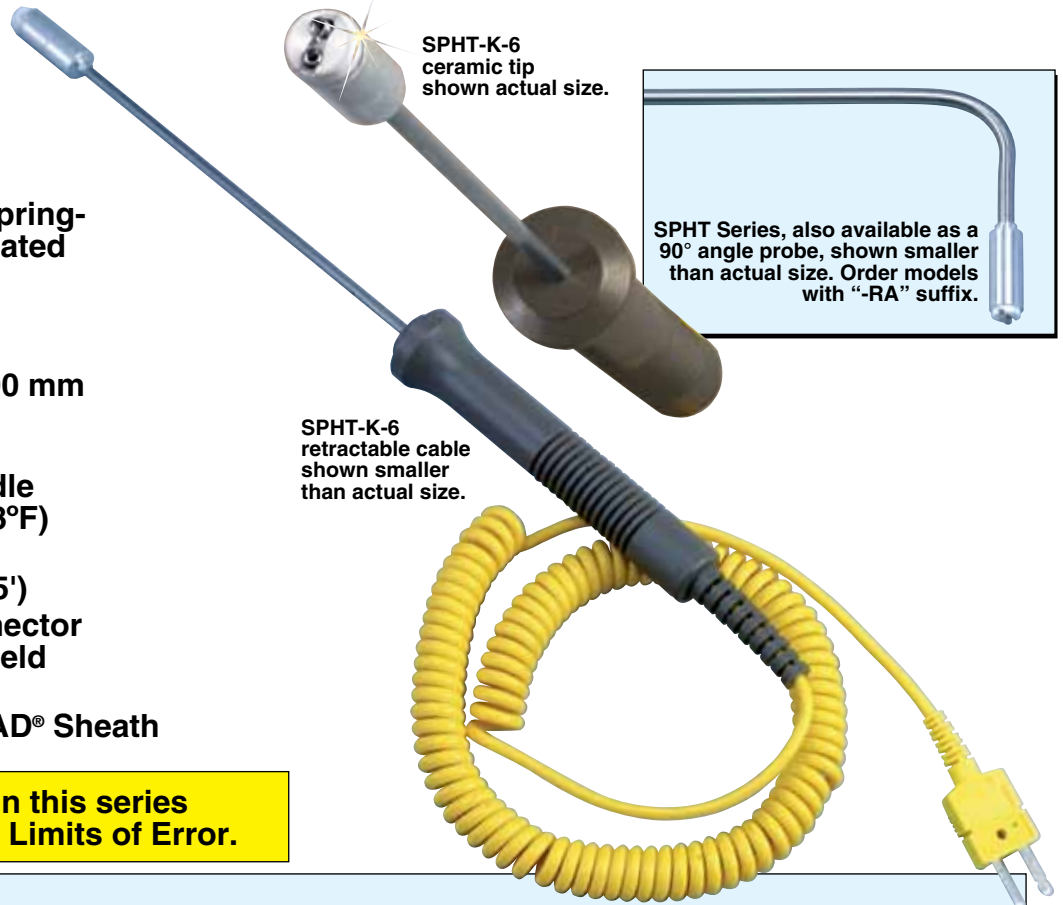


SPHT-K-6 ceramic tip shown actual size.

SPHT Series, also available as a 90° angle probe, shown smaller than actual size. Order models with "-RA" suffix.

SPHT-K-6 retractable cable shown smaller than actual size.

**All the probes in this series meet the Standard Limits of Error.**

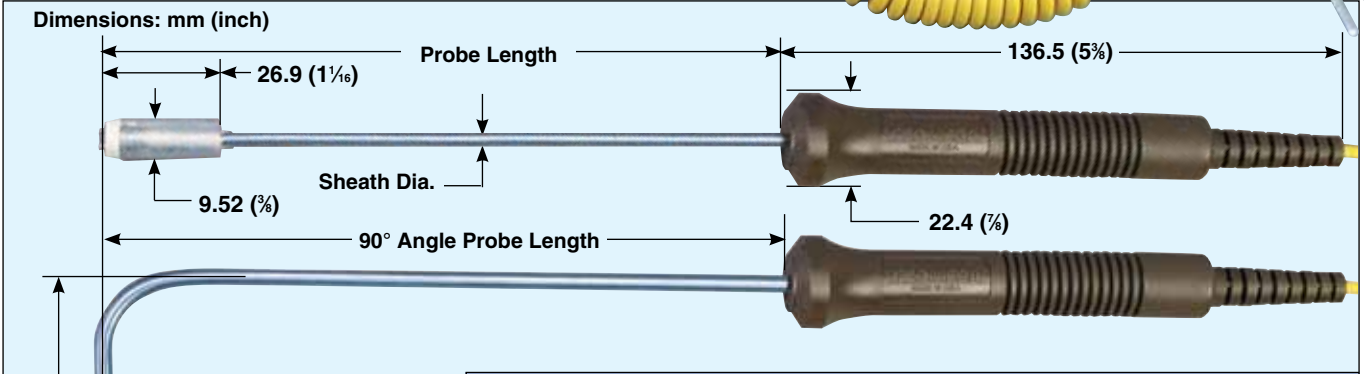

To Order			
Model No.	Calibration	Sheath Diameter mm (inch)	Probe Length mm (inch)
SPHT-J-6	J	3.0 (1/8)	150 (6)
SPHT-J-12		6.0 (1/4)	300 (12)
SPHT-J-12-RA		6.0 (1/4)	300 (12)
SPHT-K-6	K	3.0 (1/8)	150 (6)
SPHT-K-12		6.0 (1/4)	300 (12)
SPHT-K-12-RA		6.0 (1/4)	300 (12)
SPHT-E-6	E	3.0 (1/8)	150 (6)
SPHT-E-12		6.0 (1/4)	300 (12)
SPHT-E-12-RA		6.0 (1/4)	300 (12)

**The SPHT-K-6 is Included at No Additional Cost With These Infrared Thermometers**  
 OS532E, OS533E, OS534E, OS534E-CF, OS533E-CF

Comes with a plastic cap for protection of the surface element.  
**Ordering Examples:** SPHT-K-12, 12" long, Type K surface probe.  
 SPHT-J-12-RA, 12" long, Type J, 90° right angle surface probe.