

Detector Switch Water-proof Type

SPVQ6 Series



One of the smallest in the industry with 13.3×5.3×7mm.

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products



Typical Specifications

Items		Specifications	
Rating (max.) / (min.) (Resistive load)		0.1A 12V DC / 50μA 5V DC	
Voltage drop (Initial/After operating life)		0.2V max./0.3V max.	
Operating force		Push type	Actuator type
		1±0.5N	3N max.
Operating life	Without load	300,000cycles	
	With load	300,000cycles (0.1A 12V DC)	

Product Line

Poles	Positions	Change over timing	Operating part shape	Terminal type	Main body form	Minimum order Unit (pcs.)	Product No.	Drawing No.
1	2	Non shorting	Push	For PC board	Boss - right side	6,000	SPVQ640100	1
					Boss - left side		SPVQ640200	2
			Actuator		Boss - right side		SPVQ630100	3
					Boss - left side		SPVQ630200	4

Packing Specifications

Bulk

Number of packages (pcs.)		Export package measurements (mm)
1 case /Japan	1 case /export packing	
1,500	6,000	540×360×270

Dimensions

Unit:mm

No.	Style
1	<p> Total travel position Terminal No.①-② Operating position Terminal No.①-③ Operating position Free position Terminal No.①-③ ON Terminal No.① Terminal No.② Terminal No.③ </p>
2	<p> Total travel position Terminal No.①-② Operating position Terminal No.①-③ Operating position Free position Terminal No.①-③ ON Terminal No.① Terminal No.② Terminal No.③ </p>

Notes

- This unit cannot be used in water.
- Please place purchase orders per minimum order unit N (integer).



Automotive
Use

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
 Package Type

TACT Switch™


Custom-
 Products

Dimensions

Unit:mm





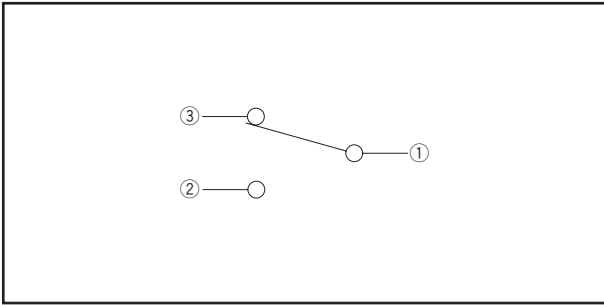







No.	Style
3	
4	

Circuit Diagram



Automotive
 Use

List of Varieties (Water-proof Type / Telephone-hook Type)

Series	Water-proof Type					Telephone-hook Type	
	SPVQ4	SPVQ6	SPVQ7	SPVQA	SSCN	SPPY5	
Detector Photo							
Operation type							
Operating temperature range	-40°C to +85°C					-10°C to +60°C	
Automotive use	●	●	●	●	●	—	
Rating (max.) (Resistive load)	0.1A 12V DC					50mA 48V DC max.	
Rating (min.) (Resistive load)	50μA 3V DC	50μA 5V DC			100μA 3V DC		
Electrical performance	Initial contact resistance	500mΩ max.				100mΩ max.	
	Insulation resistance	100MΩ min. 500V DC					
	Voltage proof	500V AC for 1 minute					
Mechanical performance	Terminal strength	3N for 1 minute				5N for 1 minute	
	Actuator strength	20N			10N	5N	
Durability	Operating life without Load	300,000cycles 1Ω max.			100,000cycles 1Ω max.	300,000cycles 1Ω max.	
	Operating life with Load	(0.1A 12V DC) 300,000cycles 1Ω max.			(0.1A 12V DC) 100,000cycles 1Ω max.	(50mA 48V DC) 100,000cycles (100μA 3V DC) 300,000cycles	
Environmental performance	Cold	-40±2°C for 500h				-20±2°C for 96h	
	Dry heat	85±2°C for 500h				85±2°C for 96h	
	Damp heat	60±2°C, 90 to 95%RH for 500h				40±2°C, 90 to 95%RH for 96h	
Dimensions (mm)	W	14.7	13.3	14.7	15.2	13	14.4
	D	5.4	5.3	5.4	6.4	5	28.6
	H	7.6	7	6.7	7.95	25	7.15
Soldering	Manual soldering	300±10°C, 3 ⁺¹ s			—	300±10°C, 3 ⁺¹ s	350±5°C, 3s max.
	Dip soldering	260±5°C, 5±1s			—		
	Reflow soldering	—					Please see P.102
Number of poles	1					2	
Operation force	1±0.3N	3N max.	1±0.5N		2N max.	0.8N max.	
Page	92	93	95	97	99	100	

- Detector Switches Soldering Conditions102
- Detector Switches Cautions103