
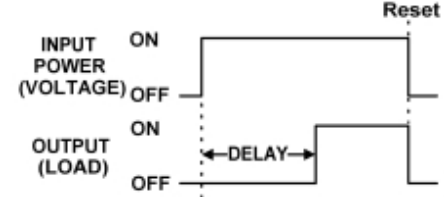

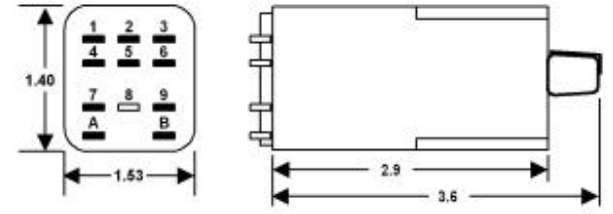




	Product Number	Function*	Input Voltage	Output	Wiring / Sockets
	SS-40222-21	ON DELAY, 0.12 - 12 hr	120 VAC/DC	12A DPDT	 <p>Use Socket 70171-D</p>

*DESCRIPTION OF FUNCTION	CHART
<p>Upon application of input voltage, the preset time begins. At the end of the preset time, the relay contacts transfer. Input voltage must be removed and reapplied to reset the time delay relay.</p>	

APPLICATION INFORMATION	DIMENSIONS
<p>Voltage Tolerance: AC Operation: +10/-15% of nominal at 50/60 Hz.; DC Operation: +10/-15% of nominal.</p> <p>Load (Burden): Less than 3VA</p> <p>Setting Accuracy: Maximum Setting (Adjustable): +5%, -0%; Minimum Setting (Adjustable): +0%, -50%</p> <p>Repeat Accuracy (Constant Voltage & Temperature): > 2 Seconds Delay +2%; 0.1 - 2 Seconds Delay +5%</p> <p>Reset Time: 0.2 Seconds</p> <p>Output Contacts: 12A Resistive @ 240VAC/30VDC, 1/2HP @ 240VAC</p> <p>Life: Mechanical: 10,000,000 operations; Full Load: 30,000 operations</p> <p>Temperature: -28° to 65° C (-18° to 150° F)</p> <p>Insulation Voltage: 2,000 volts</p> <p>Approvals:</p>  <p style="text-align: center;">with Appropriate Macromatic Socket</p>	 <p style="text-align: center;">Inches (Millimeters)</p>