SSR630DIN-DC22

Relay, Legacy, solid state, SPST NO, 30A, 48...660 VAC, 4...32 VDC Uc, SCR, AC zero cross, 22 mmm





Main

| Range | Legacy |
|--------------------------|-------------------|
| Product Type | Solid state relay |
| Nominal Output Current | 30 A |
| Network Number of Phases | 1 phase |
| Mounting Support | Panel DIN rail |
| Output Voltage | 48660 V AC |

Complementary

| Input Current Limits | 812 mA 32 V DC typical |
|-------------------------------|---|
| Switch Function | SPST |
| Contacts Type and Composition | NO |
| Tightening Torque | 0.60.7 N.m for input 0.60.7 N.m for output |
| Connections Terminals | Input screw AWG 10) Output screw AWG 10) |
| Local Signalling | Input status 1 LED green) |
| Switching Voltage | 4 V DC turn-on 1 V DC turn-off |
| Switching Device | SCR output Zero voltage switching |
| Maximum Peak Voltage | 1200 V |
| Surge Current | 1200 A 16.6 ms |
| Voltage Drop | <1.6 V on-state |
| Maximum I²t for fusing | 6000 A ² .s 8.3 ms |
| Leakage Current | 1 mA at off-state |
| DV/dt | 500 V/μs off-state maximum |
| Response Time | 8.33 ms turn-on, turn-off) |
| Height | 3.85 in (97.7 mm) |
| Width | 0.88 in (22.4 mm) |
| Depth | 3.15 in (80 mm) |
| Product Weight | 9.88 oz (280 g) |

Environment

| Product Certifications | CSA CE RoHS | |
|---------------------------------------|-----------------------|--|
| Ambient Air Temperature for Operation | -40176 °F (-4080 °C) | |
| Ambient Air Temperature for Storage | -40257 °F (-40125 °C) | |


Ordering and shipping details

| GTIN | 03606480282928 | |
|------|----------------|--|
| | | |

Offer Sustainability

| Sustainable offer status | Green Premium product | |
|----------------------------|--|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov | |
| REACh Regulation | ☑ REACh Declaration | |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EEU RoHS Declaration | |
| Mercury free | Yes | |
| RoHS exemption information | ₫Yes | |
| China RoHS Regulation | China RoHS Declaration | |
| Environmental Disclosure | Product Environmental Profile | |
| Circularity Profile | End Of Life Information | |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. | |
| | | |

Approximate Dimensions

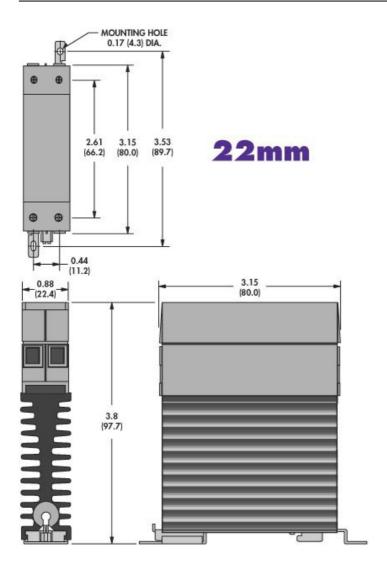

Connections and Wiring Diagrams

