


Slide Switch 3.5(H)mm, 2mm-travel Type

SSSS2 Series



Excellent application for designing compact and high density portable devices.

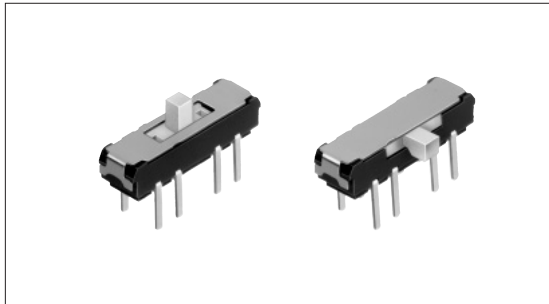

Typical Specifications

Items		Specifications
Rating (max.) / (min.) (Resistive load)		0.3A 6V DC/50 μ A 3V DC
Contact resistance (Initial performance/After lifetime)		70m Ω max./130m Ω max.
Operating force		Refer to the dimensions.
Operating life	Without load	10,000cycles*
	With load	10,000cycles (0.3A 6V DC) *

Note

*Operating life for SSSS213202 is 100 cycles


Product Line

Travel (mm)	Actuator direction	Actuator length (mm)	Poles	Positions	Changeover timing	Soldering	Minimum order unit (pcs.)	Products No.	Drawing No.				
2	Vertical	2	1	2	Non shorting	Manual, Dip	10.000	SSSS213000	1				
				3				SSSS211900	2				
			2	2				SSSS222700	3				
				3				SSSS223600	4				
			1	2				SSSS213202	5				
				3				SSSS212901	6				
	4	SSSS213100		7									
	Horizontal	2	2	1	2	Manual, Dip	10.000	SSSS212200	8				
					3			SSSS212400	9				
					4			SSSS223200	10				
				2	2			SSSS223900	11				
					3			SSSS224100	12				
					4			SSSS211603	13				
				1	2			3	1	Reflow	5.600	SSSS212301	14
												2	SSSS224001

Packing Specifications

Taping

Unit:mm



Series	Actuator direction		Number of packages (pcs.)			Tape width (mm)	Export package measurements (mm)
			1 reel	1 case /Japan	1 case /export packing		
SSSS213202	Vertical	1-pole, 2-positions		1,200	2,400	4,800	428 × 413 × 172
SSSS212901		1-pole, 3-positions		1,000	2,000	4,000	
SSSS211603 SSSS212301 SSSS224001	Horizontal		1,400	2,800	5,600	24	406 × 406 × 190

Bulk

Series	Number of packages (pcs.)		Export package measurements (mm)
	1 case /Japan	1 case /export packing	
SSSS211900, SSSS212200, SSSS212400, SSSS213000, SSSS213100, SSSS222700, SSSS223200, SSSS223600, SSSS223900, SSSS224100	2,000	10,000	400 × 270 × 290

Notes

1. Products other than those listed in the above chart are also available. Please contact us for details.
2. Please place purchase orders per minimum order unit N (integer).

Slide Switch 3.5(H)mm, 2mm-travel Type | SSSS2 Series

Dimensions

Vertical Actuator Type

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from the direction A)
1		<p>Operating force with detent : 1.5N</p>	
2		<p>Operating force with detent : a → b } 1.5N c → b } b → a } 2.5N b → c }</p>	
3		<p>Operating force with detent : 1.5N</p>	
4		<p>Operating force with detent : a → b } 1.5N c → b } b → a } 2.5N b → c }</p>	
5		<p>Operating force with detent: 3N</p>	
6		<p>Operating force with detent : a → b } 1.5N c → b } b → a } 2.5N b → c }</p>	

Dimensions

Horizontal Actuator Type

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from the direction A)
7		<p>Operating force with detent : 1.5N</p>	
8		<p>Operating force with detent : a → b, c → b } 1.5N b → a, b → c } 2.5N</p>	
9		<p>Operating force with detent : b → a, c → d, c → b } 2.5N a → b, d → c } 1.5N</p>	
10		<p>Operating force with detent : 1.5N</p>	
11		<p>Operating force with detent : a → b, c → b } 1.5N b → a, b → c } 2.5N</p>	
12		<p>Operating force with detent : b → a, c → d, c → b } 2.5N a → b, d → c } 1.5N</p>	

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Small size
General Use type

Big size
General Use type

Other Use type

Dimensions

Horizontal Actuator Type, Reflow Type









Unit:mm

No.	Photo	Style	PC board mounting hole and land dimensions (Viewed from the direction A)
13		<p>Operating force with detent : 1.5N</p>	
14		<p>Operating force with detent : a → b } 1.5N c → b } 2.5N</p>	
15		<p>Operating force with detent : a → b } 1.5N c → b } 2.5N</p>	

Circuit Diagram (Viewed from Direction A)

<p>1-pole, 2-positions</p>	<p>1-pole, 3-positions</p>	<p>2-poles, 2-positions</p>	<p>2-poles, 3-positions</p>
<p>1-pole, 2-positions</p>	<p>1-pole, 3-positions</p>	<p>1-pole, 4-positions</p>	
<p>2-poles, 2-positions</p>	<p>2-poles, 3-positions</p>	<p>2-poles, 4-positions</p>	
<p>1-pole, 2-positions</p>	<p>1-pole, 3-positions</p>	<p>2-poles, 3-positions</p>	

List of Varieties

Series		SSAJ	SSAG	SSAH	SSAD	SSSS8	SSSS7 ※	SSSS2	SSSS9 ※	
Photo										
Outline specifications	Travel (mm)	1.4	1.5			1.5 2		2		
	Actuator direction	Horizontal				Vertical Horizontal	Horizontal	Vertical Horizontal		
	Number of poles	1				1 2				
Dimensions (mm)	W	5.5	9.05	9.5	6.7	11.2	8.8	13	14	
	D	2.5	3		3.2	2.6	3	3.5	4.7	
	H	0.7	1.15	0.9	0.7	1.4	2		5	
Operating temperature range		-10°C to +60°C		-30°C to +60°C	-40°C to +85°C	-40°C to +85°C			-10°C to +60°C	
Rating (max.) / (min.) (Resistive load)		10mA 5V DC		1mA 5V DC		0.3A 5V DC	0.3A 4V DC	0.3A 6V DC	0.1A 12V DC	
		50μA 3V DC								
Electrical performance	Initial contact resistance	300mΩ max.	200mΩ max.		100mΩ max.	70mΩ max.			30mΩ max.	
	Insulation resistance	100MΩ min. 100V DC					100MΩ min. 500V DC			
	Voltage proof	100V AC for 1minute					500V AC for 1minute			
Mechanical performance	Terminal strength	3N for 1minute								
	Actuator strength	10N			5N	10N		20N	30N	
							10N Static force			10N
Durability	Operating life without load	10,000cycles 500mΩ max.	100,000cycles 500mΩ max.	10,000cycles 300mΩ max.	10,000cycles 100mΩ max. ※2				10,000cycles 60mΩ max.	
	Operating life without load Load:as rating				10,000cycles 200mΩ max.				10,000cycles 80mΩ max.	
Environmental performance	Cold	-40±2°C for 96h	-20±2°C for 96h			-40°C for 96h	-20°C for 96h			
	Dry heat	85±2°C for 96h								
	Damp heat	40±2°C, 90~95%RH for 96h								
Soldering	Manual soldering	350±5°C 3s max.			300±5°C 5s max.		300±5°C 3s max.	350±10°C 4s max.	300±10°C 5s max.	
	Dip soldering							260±5°C 3±1s	260±5°C 5 ⁹ s (2回)	
	Reflow soldering	Please see P.182								
Poles-positions	1-2	●	—	—	●	●	●	●	●	
	1-3	—	●	●	—	●	●	●	●	
	1-4	—				●	—	●	—	
	2-2	—				●	—	●	●	
	2-3	—				●	—	●	●	
	2-4	—						●	—	
	4-2	—								
Page		138	140	143	145	147	151	154	158	

- Slide Switches Soldering Conditions182
- Slide Switches Cautions183

Note

※The operating temperature range for automotive applications can be raised upon request. Please contact us for details.

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Small size
General Use type


Big size
General Use type

Other Use type

Soldering Conditions

Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple 0.1 to 0.2 φ CA (K) or CC (T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.
3. Temperature profile

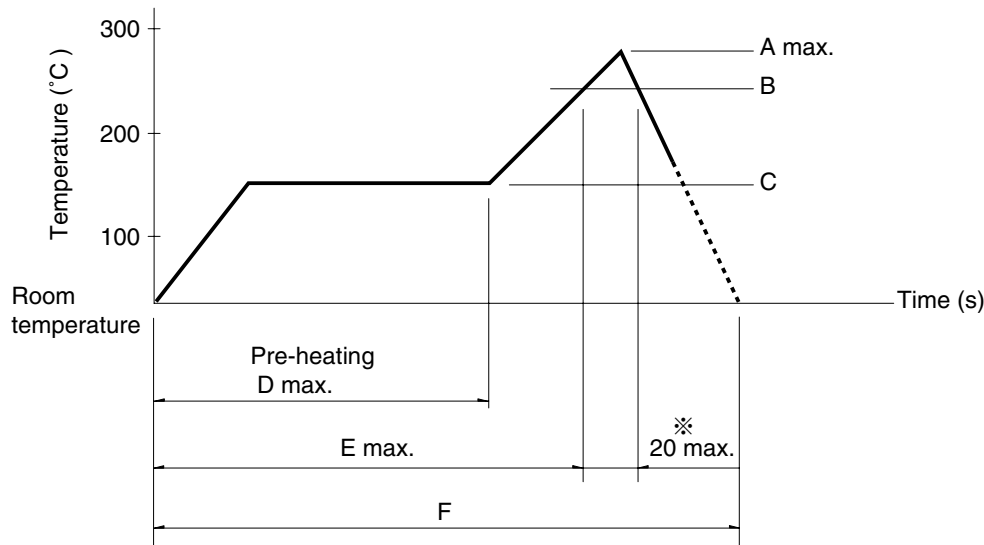

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Small size
General Use type

Big size
General Use type

Other Use type

Series (Reflow type)			A (°C) 3s max.	B (°C)	C (°C)	D (s)	E (s)	F (s)
SSSS2	Vertical	1-pole, 3-positions	250	200	150	120	—	—
	Horizontal	1-pole, 2-positions						
	Vertical	1-pole, 2-positions	240					
	Horizontal	1-pole, 3-positions 2-poles, 3-positions						
SSSS7			250					
SSAH, SSAG			260	230	150	120	—	—
SSAD			240	220				
SSSS8	Horizontal	1-pole, 2-positions 1-pole, 3-positions (1.5mm)	255	200				
		1-pole, 3-positions (2mm) 1-pole, 4-positions 2-poles, 2-positions	240	220				
	Vertical							

Notes

1. The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.
3. ※SSAH and SSAG only 40's.