

(2.54 mm) .100"

SSW, SSQ SERIES

# THROUGH-HOLE .025" SQ POST SOCKET

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SSW](http://www.samtec.com?SSW) or [www.samtec.com?SSQ](http://www.samtec.com?SSQ)

**Insulator Material:** Black Liquid Crystal Polymer (-S & -D) or Black High Temperature Thermoplastic (-T)  
**Contact Material:** Phosphor Bronze  
**Plating:** Au or Sn over 50 μ" (1.27 μm) Ni

**Current Rating (SSW/TSM):** 4.7 A per pin (2 pins powered)  
**Current Rating (SSQ/TSW):** 6.3 A per pin (2 pins powered)  
**Operating Temp Range:** -55 °C to +125 °C with Gold, -55 °C to +105 °C with Tin

**Insertion Depth:** (3.68 mm) .145" to (6.35 mm) .250"  
**Normal Force:** Standard= 125 grams (4.4 N)  
**Max Cycles:** 100 with 10 μ" (0.25 μm) Au  
**Voltage Rating:** 465 VAC / 655 VDC  
**RoHS Compliant:** Yes


## Mates With:

TSW, MTSW, MTLW, DW, EW, ZW, TSS, ZSS, TSM, TSSH, HTSS

## HIGH-SPEED CHANNEL PERFORMANCE

Rating based on Samtec reference channel. For full SI performance data visit [Samtec.com](http://Samtec.com) or contact [SIG@samtec.com](mailto:SIG@samtec.com)

**8**  
Gbps

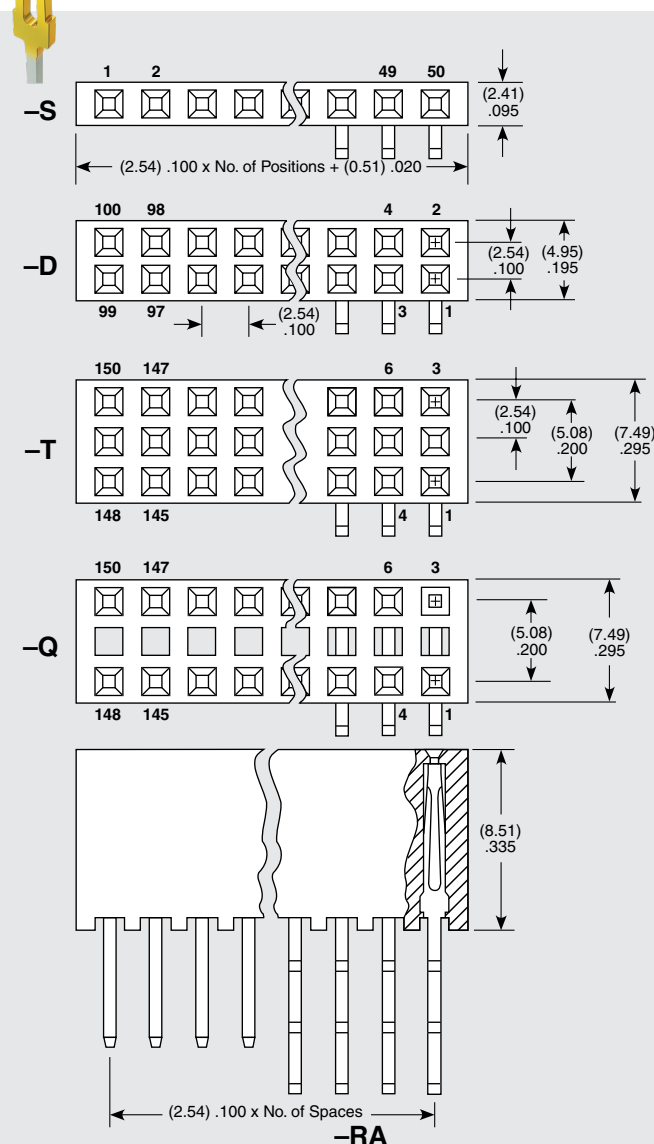

<b>TYPE STRIP</b>	<b>PIN CENTERS</b>	<b>NO. PINS PER ROW</b>	<b>LEAD STYLE</b>	<b>PLATING OPTION</b>	<b>ROW OPTION</b>	<b>TAIL OPTION</b>	<b>OTHER OPTION</b>
SSW = Solder Tail SSQ = Square Tail	-1 = (2.54 mm) .100" Centers 			-F = Gold flash on contact, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail -G = 20 μ" (0.51 μm) Gold on contact, Gold flash on tail -T = Matte Tin (-T N/A on LIF contacts)	-S = Single Row -P = Single Row (36 pins max) -D = Double Row -T = Triple Row -Q = Double Row .200" (5.08 mm) row space (Outer rows filled only)	-RA = Right-angle (Leave blank for straight pin version)	-LL = Locking Lead Two leads per strip crimped in opposite directions on or near centerline. Available on tails from (2.29 mm) .090" to (7.87 mm) .310" only. N/A with single row 1 or 2 positions. - "XXX" = Polarized (Specify "XXX" as position number)

## PROCESSING

**Lead-Free Solderable:** Yes  
 -S and -D row option  
 No, Lead Wave only:  
 -P, -T and -Q row option

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)




**Note:** Some lengths, styles and options are non-standard, non-returnable.

## Straight Pin Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE		SINGLE DOUBLE OR TRIPLE A
Standard Insertion Force	Low Insertion Force*	
-01	-21	(2.64) .104
-02	-22	(4.93) .194
-03	-23	(10.00) .394
-04	-24	(14.83) .584
-06**	Not Available	(3.15) .124


\* LIF not available with Tin Plating  
 \*\*Style -06 Not available with SSQ

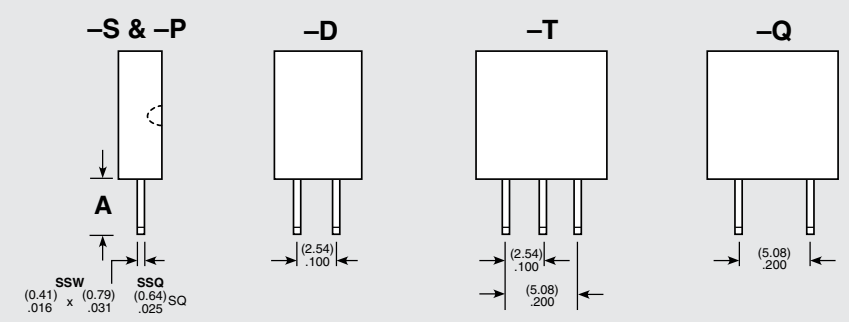

## Right-Angle Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE	SINGLE (-S) A	DOUBLE (-D) A	TRIPLE (-T & -Q) A
-02	-22	(2.54) .100	(2.54) .100
-03	-23	(7.62) .300	(7.62) .300
-04	-24	(12.45) .490	Not Available

\*LIF not available with Tin Plating

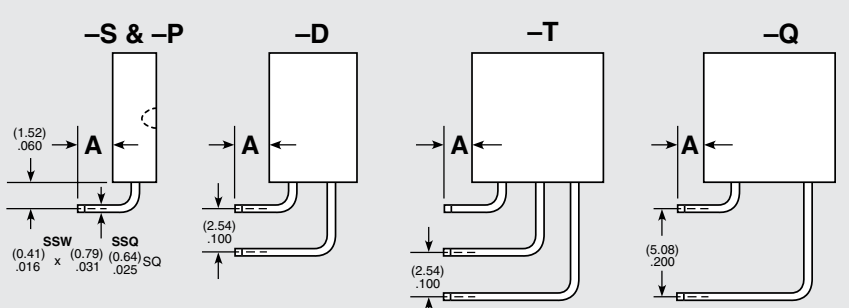

Due to technical progress, all designs, specifications and components are subject to change without notice.

Due to technical progress, all designs, specifications and components are subject to change without notice.