

**SWK 12 Series, High Security**

**Features**

- SPST type - 8 disc tumblers
- All keylocks are supplied with 2 brass keys on a ring



**Typical performance characteristics**

Contact timing . . . . . non-shorting  
 Contact rating . . . . . 5 A @ 115 VAC, 15 A @ 24 VDC resistive  
 Electrical life . . . . . 20,000 cycles  
 Contact resistance, initial . . . . . 50 mOhms max.  
 Dielectric strength . . . . . 1,000 VAC @ sea level  
 Actuator travel . . . . . 90°  
 Key changes . . . . . 10 standard

**Environmental specification**

Operating temperature . . . . . -30°C to +85°C  
 Storage temperature . . . . . -30°C to +85°C

**Material specifications**

Contacts . . . . . silver  
 Cylinder material . . . . . zinc alloy  
 Lock body . . . . . zinc alloy  
 Key material . . . . . brass  
 Terminals/fixing contacts . . . . . screw Type  
 Beveled frame finish . . . . . polished chrome  
 RoHS Directive 2002/95/EC . . . . . compliant

Keylock Switches





<b>Product key</b>		Typical product key		<b>SWK12</b>	<b>F</b>	<b>315</b>
<b>Type</b>						
<b>SWK12</b>		High security key switch				
<b>Action and key removal</b>						
	position 1	position 2	remove key pos.			
<b>F</b>	ON	OFF	pos. 1			
<b>1F</b>	ON	OFF	pos. 1 or pos. 2			
<b>3F</b>	ON	OFF	pos. 2			
<b>Key coding</b>						
<b>309</b>	<b>311</b>	<b>315</b>	<b>320</b>			

**SWK 12 Series, High Security (Continued)**

Action and key position



Codes F, 1F, 3F

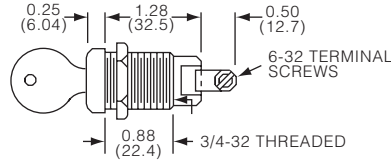

Product key	Pos 1	Pos2	Remove key	Key coding	Part Number
SWK 121F311	On	Off	Position 1 or 2	311	3-1437597-5
SWK 121F315				315	3-1437597-6
SWK 121F320				320	3-1437597-7
SWK 123F315			Position 2	315	3-1437597-8
SWK 12F309			Position 1	309	3-1437597-9
SWK 12F315				315	4-1437597-0
SWK 12F320				320	4-1437597-1
SWK 12KF315	spare key			315	4-1437597-2