


Capacitor, tantalum, 33 uF, +/-10% Tol, 10V@85C, Lead Spacing=5.08 mm

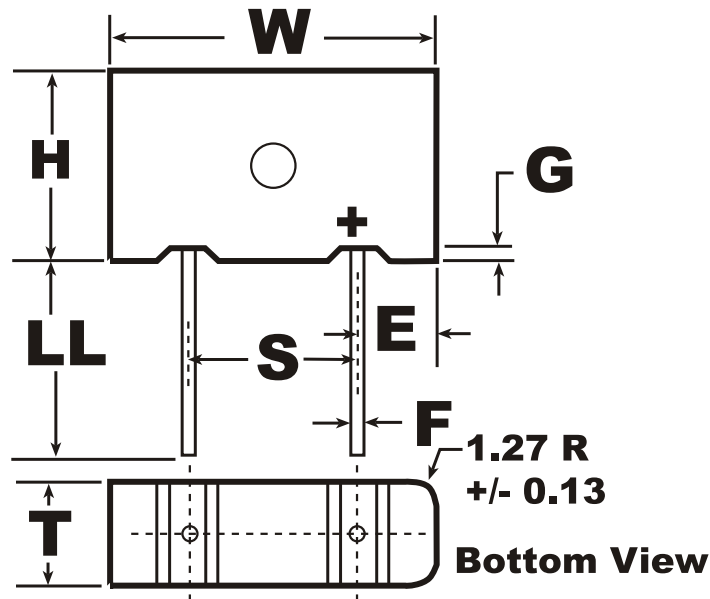

Dimensions (mm)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
W	8.26	+/-0.38	Value:	33 uF
T	4.32	+/-0.38	Voltage DC @ 85C:	10V
H	8.26	+/-0.38	Voltage DC @ 125C:	7V
F	0.64	+/-0.03	Tolerance:	+/-10%
S	5.08	+/-0.127	Body Type:	Radial Molded
LL	12.7	+/-3.18	Temperature Range:	-55/+125C
			Application:	General Purpose
			Termination Type:	Tin-Lead (SnPb)
			ESR:	2.1 Ohm
			ESR Frequency @ 25C:	100kHz
			Leakage Current:	2 uA
			Dissipation Factor:	6%
			Package Kind:	Bulk
			Package Type:	Bag