

TE Internal #: T4051410004-003 M8/M12 Cable Assemblies, Sensor/Actuator, 4 Positions, A M8 /M12 Cable Assembly Keying, Receptacle, M8 Pigtail, Cable Assembly Length 1500 mm

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies > M8 FEMALE R/A SINGLE ENDED CABLE ASSY



M8/M12 Application Type: Sensor/Actuator

Number of M8/M12 Cable Assembly Positions: 4 M8/M12 Cable Assembly Keying: A M8/M12 Cable Assembly Connector Type: Receptacle M8/M12 Cable Assembly Type: M8 Pigtail

All M8 FEMALE R/A SINGLE ENDED CABLE ASSY (56)

Features

Product Type Features

LED	Without
Cable Type	PVC
Product Type	Cable Assembly
Assembly Type	Pigtail
M8/M12 Cable Assembly Connector Type	Receptacle
M8/M12 Cable Assembly Type	M8 Pigtail
M8/M12 Cable Assembly Shielded	No
Configuration Features	
Number of M8/M12 Cable Assembly Positions	4
M8/M12 Cable Assembly Keying	A
M8/M12 Cable Assembly Configuration	Single Ended
Electrical Characteristics	
Operating Voltage	30 VAC

T4051410004-003

M8/M12 Cable Assemblies, Sensor/Actuator, 4 Positions, A M8/M12 Cable Assembly Keying, Receptacle, M8 Pigtail, Cable Assembly Length 1500 mm



Body Features

Wire Color	Brown, White, Blue, Black
Cable Exit Angle	Right Angle
Environmental Protection	With
Insulation Material	PUR
Conductor Material	Copper Alloy
Cable Jacket Color	Black
Contact Features	
Contact Current Rating	3 A
Mechanical Attachment	
Screw & Hole Thread Size	M8
Housing Features	
M8/M12 Cable Assembly Housing Material	Nylon
Dimensions	
Wire Size	.25 mm ²
Cable Assembly Length	1500 mm

Operation/Application

Sensor/Actuator

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

Halogen Content

Solder Process Capability

Compliant with Exemptions

Compliant with Exemptions

Restricted Materials Above Threshold

Current ECHA Candidate List: JUN 2020 (209)

Candidate List Declared Against: JAN 2020

(205)

SVHC > Threshold:

Pb (1.9% in Pb-Alloy in Copper)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

Not applicable for solder process capability

T4051410004-003

M8/M12 Cable Assemblies, Sensor/Actuator, 4 Positions, A M8/M12 Cable Assembly Keying, Receptacle, M8 Pigtail, Cable Assembly Length 1500 mm




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

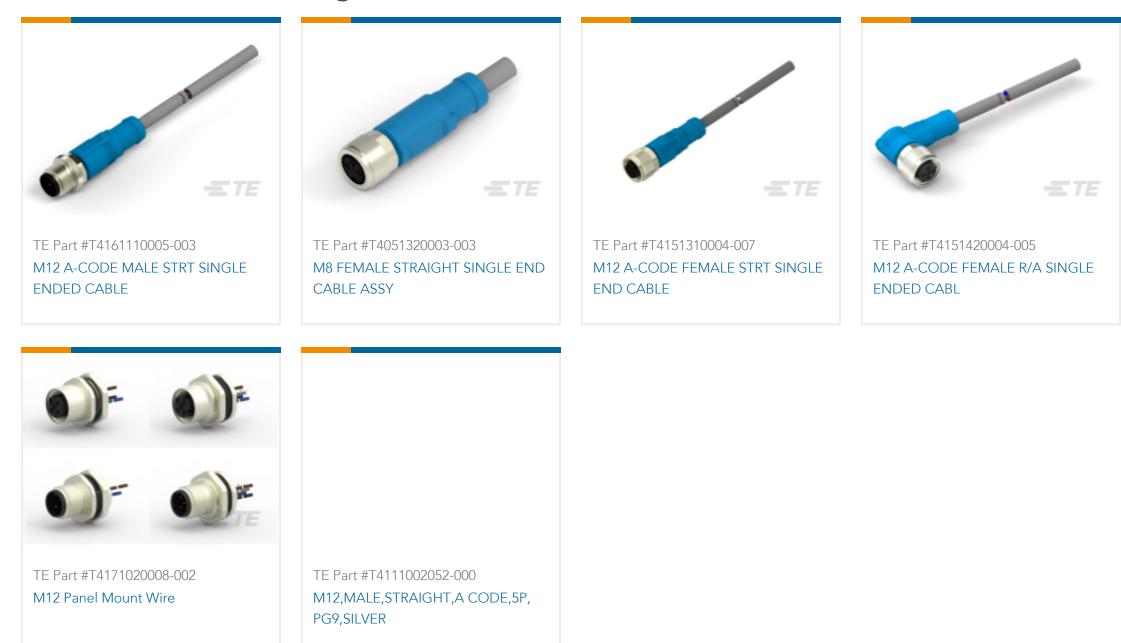

Documents

Product Drawings M8 CABLE RA FEMALE 1.5M 4P PVC CABLE

English

CAD Files

C For support call+1 800 522 6752

T4051410004-003

M8/M12 Cable Assemblies, Sensor/Actuator, 4 Positions, A M8/M12 Cable Assembly Keying, Receptacle, M8 Pigtail, Cable Assembly Length 1500 mm



3D PDF

3D

Customer View Model ENG_CVM_CVM_T4051410004-003_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_T4051410004-003_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_T4051410004-003_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

Product Specifications Application Specification

English