T4110401041-000 - ACTIVE

M12 Connector

TE Internal #: T4110401041-000 M12 Connector, Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors > M12 Field Installable Unshielded



Connector System: Wire-to-Wire Number of Positions: 4 Sealable: Yes Connector & Contact Terminates To: Wire & Cable Contact Current Rating (Max): 4A

All M12 Field Installable Unshielded (102)

Features

Product Type Features

Prewired	No
Product Type	Connector
Accessory Color	Black
Assembly Type	Electrical Connector
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Plastic
Configuration Features	
Factory Installed Backshell	No
Keying	В
Number of Positions	4

S For support call+1 800 522 6752

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



VAC
one
,
one
tomer Sealed
vamide 66 GF25
ket

Mechanical Attachment

Mating Retention Type	Threaded Coupling
Mating Alignment	With
Polarization Code	В
Mating Alignment Type	Keyed
Housing Features	
Circular Connector Shell Size	20
Dimensions	
Wire Size	.82 – .2 mm²
Usage Conditions	
IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Durability Rating	100 Cycles

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



Circuit Application	Signal
Shielded	No
Industry Standards	
UL Flammability Rating	HB
Packaging Features	
Packaging Quantity	1
Other	
Field Serviceable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold:

Halogen Content

Solder Process Capability

Pb (4% in Component Part) Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



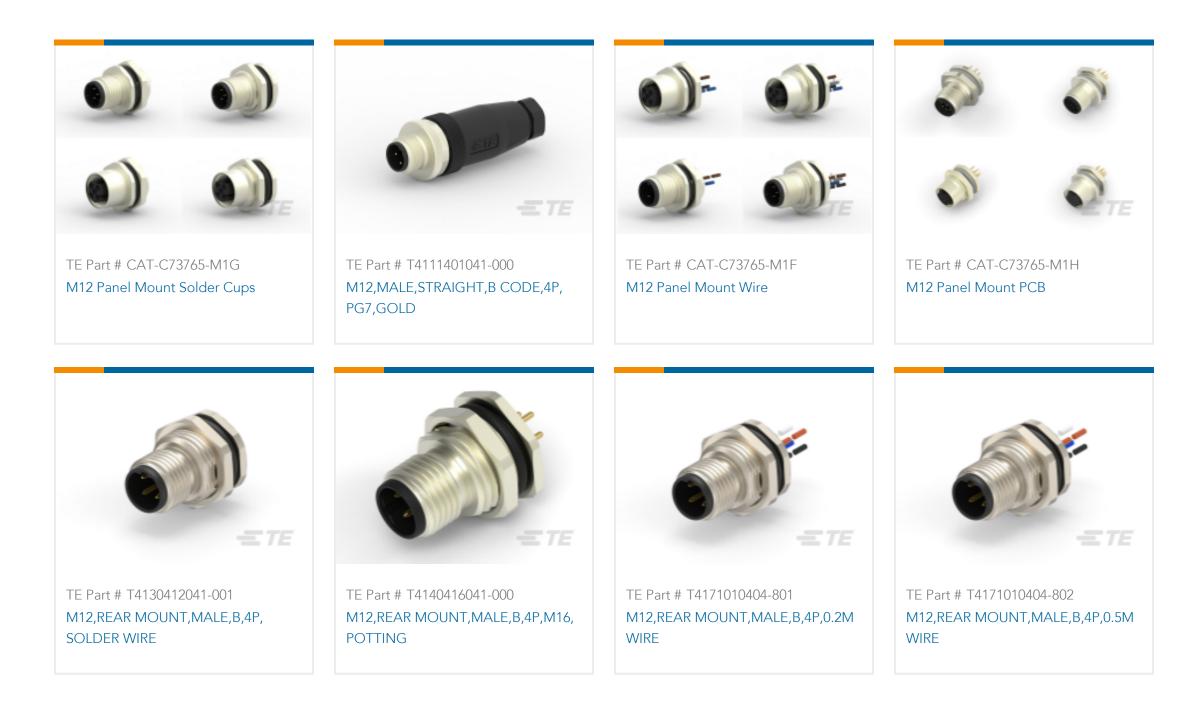


Also in the Series | M12 Connector





Customers Also Bought

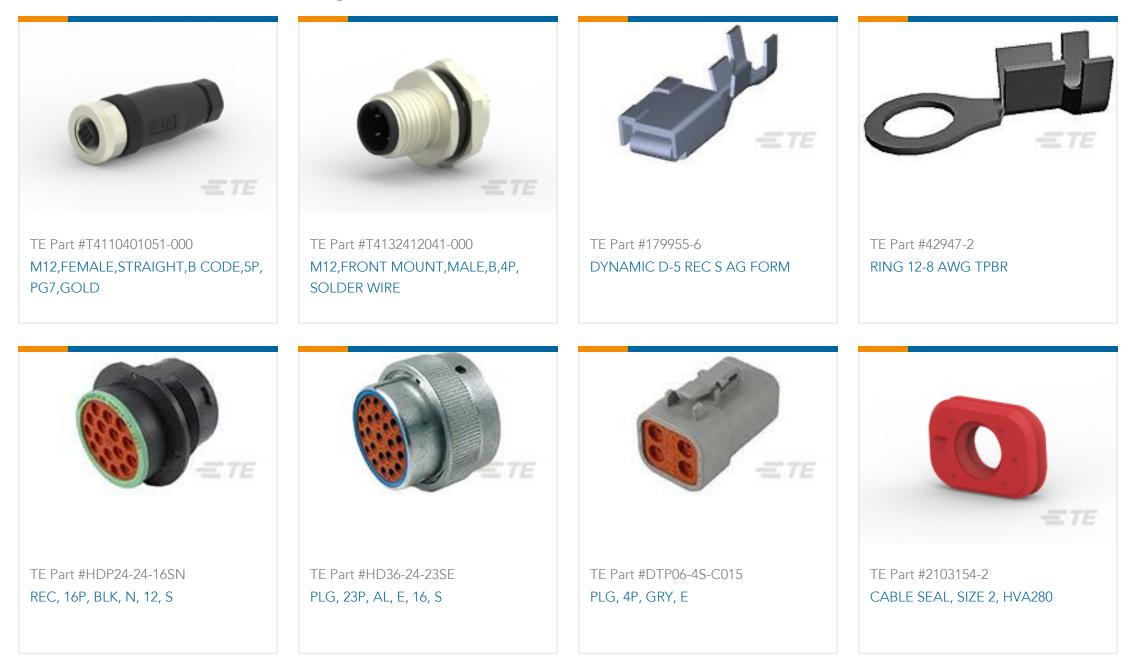

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



TE Part #2224921-3 CONTACT ASSEMBLY, SHORT SOCKET

Documents

Product Drawings

M12, FEMALE, STRAIGHT, B CODE, 4P, PG7, GOLD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_T4110401041-000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_T4110401041-000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4110401041-000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

M8 / M12 Connector System Catalog

English

Product Specifications Application Specification

English

Product Environmental Compliance Product Compliance

English

Product Compliance

English