# T4111001031-000 - ACTIVE

#### M12 Connector

TE Internal #: T4111001031-000 M12 Connector, Standard Circular Connectors, Wire-to-Wire, 2 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT

#### View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors > M12 Field Installable Unshielded



Connector System: Wire-to-Wire Number of Positions: 2 Sealable: Yes Connector & Contact Terminates To: Wire & Cable Contact Current Rating (Max): 4A

#### All M12 Field Installable Unshielded (102)

### Features

#### **Product Type Features**

Prewired	No		
Product Type	Connector		
Accessory Color	Black		
Assembly Type	Electrical Connector		
Connector System	Wire-to-Wire		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Circular Connector Type	Plug		
Shell Type	Plastic		
Configuration Features			
Keying & Polarized Position Locations	A		
Factory Installed Backshell	No		
Keying	A		

**C** For support call+1 800 522 6752

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 2 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



Number of Positions	2
Number of Power Positions	0
Number of Signal Positions	2
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	
Peripheral Seal Material	Silicone
Environmental Protection	IP67
Feedthrough Type	Yes
O-Ring Material	Silicone
Environmental Protection Type	Elastomer Sealed
Shell Base Material	PBT
Circular Connector Insulation Material Type	Polyamide 66 GF25
Contact Features	
Contact Current Rating (Max)	4 A
Reverse Gender	No
Circular Connector Contact Type	Pin
Mechanical Attachment	
Mating Retention Type	Threaded Coupling
Mating Alignment	With
Polarization Code	A
Mating Alignment Type	Keyed
Housing Features	
Circular Connector Shell Size	20
Dimensions	
Wire Size	.82 – .2 mm²
Usage Conditions	
IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 2 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



#### **Operation/Application**

Durability Rating	100 Cycles
Circuit Application	Signal
Shielded	No
Industry Standards	
UL Flammability Rating	HB
Packaging Features	
Packaging Quantity	1
Other	
Field Serviceable	Yes

### Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021

**C** For support call+1 800 522 6752

#### Halogen Content

Solder Process Capability

(219)

Candidate List Declared Against: JUL 2021

(219)

SVHC > Threshold:

#### Pb (3.7% in Component Part)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 2 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT



# **Compatible Parts**

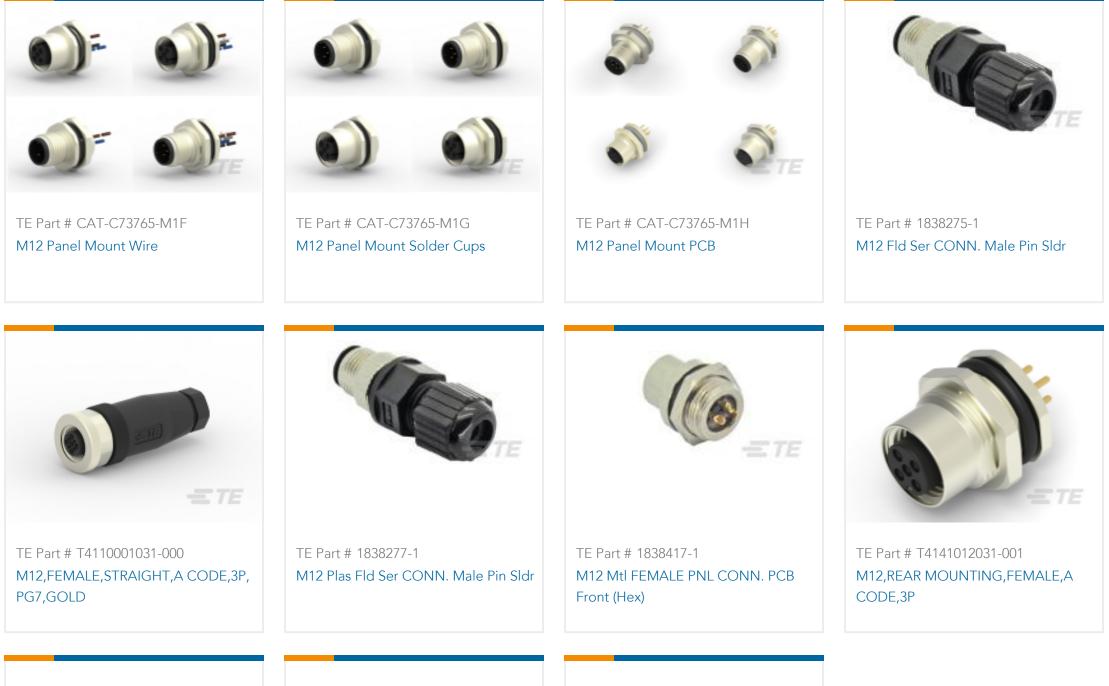



TE Part # T4131012031-001




TE Part # T4171110003-801



TE Part # T4171110003-802

M12,REAR MOUNT,FEMALE,A,3P,	M12,REAR MOUNT,FEMALE,A,3P,0.2	M12,REAR MOUNT,FEMALE,A,3P,0.5
SOLDER WIRE	M WIRE	M WIRE

## Also in the Series | M12 Connector

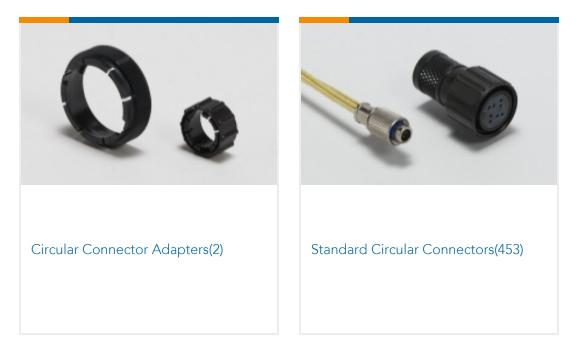

Customers Also Bought

M12 Connector, Standard Circular Connectors, Wire-to-Wire, 2 Position, Sealable, Wire & Cable, 4A Contact Current Rating (Max), Signal, PBT







### Documents

Product Drawings M12,MALE,STRAIGHT,A CODE,3P,PG7,GOLD

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_T4111001031-000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_T4111001031-000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4111001031-000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

M8 / M12 Connector System Catalog

English

**Product Specifications Application Specification** English